


40 to 60 W Constant Current LED Drivers with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 to 277 Vac, 220 to 240 Vac	60 W	24 to 56 Vdc	700 mA to 1.4 A CC	up to 87% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100% (% of Iout)	400 ms

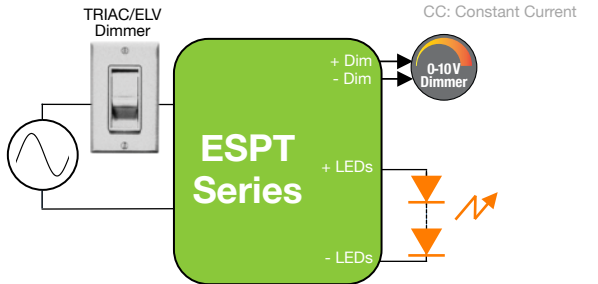

FEATURES

- Same features as the ESP series but with a thermally-enhanced plastic case
- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- ESPTxxxW models: TRIAC and ELV dimming only at 120 Vac
- ESPTxxxE models: ELV dimming only at 230 Vac
- 90°C maximum case hot spot temperature
- Class 2 power supply
- Lifetime: 50,000 hours at 70°C case hot spot temperature (some models have higher lifetime. Check lifetime curves in page 6)
- IP66-rated case with silicone-based potting
- Two 0-10V dimming profiles are available:
 - Linear 0-10 V dimming: 10V=100%, 1V=10%, 0.1V=1%.
 - Non-linear 0-10V dimming: 10V to 8.1V=100%, 1V to 0.8V=1%, <0.8V dim-to-off.
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac) and Class A (277 Vac)
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- Worldwide safety approvals

	ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max Output Power (W)	Output Voltage Range	
					Min	Max
120-277 VAC NOMINAL INPUT VOLTAGE	ESPT040W: 30-40W					
	ESPT040W-0700-56	120 - 277	700	39.2	40	56
	ESPT040W-0800-42-Z1 ⁽¹⁾	120 - 277	800	33.6	24	42
	ESPT040W-0900-42-Z1 ⁽¹⁾	120 - 277	900	37.8	24	42
	ESPT050W: 41-50W					
	ESPT050W-1050-42-Z1 ⁽¹⁾	120 - 277	1050	44.1	24	42
220-240 VAC NOMINAL INPUT VOLTAGE	ESPT050W-1200-42-Z1 ⁽¹⁾	120 - 277	1200	50.4	24	42
	ESPT050W-1400-34	120 - 277	1400	47.6	23	34
	ESPT060W: 51-60W					
	ESPT060W-1400-42-Z1 ⁽¹⁾	120 - 277	1400	58.8	24	42
	ESPT040E: 30 to 40 W					
	ESPT040E-0800-42	220/230/240	800	33.6	24	42
220-240 VAC NOMINAL INPUT VOLTAGE	ESPT040E-0900-42	220/230/240	900	37.8	24	42
	ESPT050E: 41 to 50 W					
	ESPT050E-1050-42	220/230/240	1050	44.1	24	42
	ESPT050E-1200-42	220/230/240	1200	50.4	24	42
	ESPT060E: 41 to 50 W					
	ESPT060E-1400-42	220/230/240	1400	58.8	24	42

Notes:

- 1) ESPT models with the "-Z1" suffix exhibit a non-linear 0-10V dimming profile with dim-to-off: 10V to 8.1V=100%, 1V to 0.8V=1%, <0.8V dim-to-off.
- 2) The ESPT driver case must be mounted by using a minimum of two metal clips. By default, the ESPT driver is shipped with 2 metal clips. Additional metal clips can be ordered with the following part numbers:
 - ESPT-CLIPS-100: bag of 100 clips
 - ESPT-CLIPS-1k: bag of 1000 clips
- 3) For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@ERP-Power.com

APPLICATIONS

- Indoor & outdoor
- Recessed lighting (downlights)
- Commercial & residential lighting
- Architectural lighting
- Office Lighting



CHINA Operations

tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters

tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9