Ordering number : ENA1775B

TIG056BF

N-Channel IGBT
430V, 240A, V_{CE}(sat); 3.6V TO-220F-3FS

ON Semiconductor®

http://onsemi.com

Features

- Low-saturation voltage
- Ultrahigh speed switching
- Enhansment type
- Protection diode in

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Collector to Emitter Voltage	V_{CES}		430	V
Gate to Emitter Voltage	V_{GES}		±33	V
Collector Current (Pulse)	I_{CP}	V_{GE}=15V, C_M=2000μF	240	A
Allowable Power Dissipation	P_D	Tc=25°C	30	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		-55 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Package Dimensions

unit : mm (typ)

7528-002

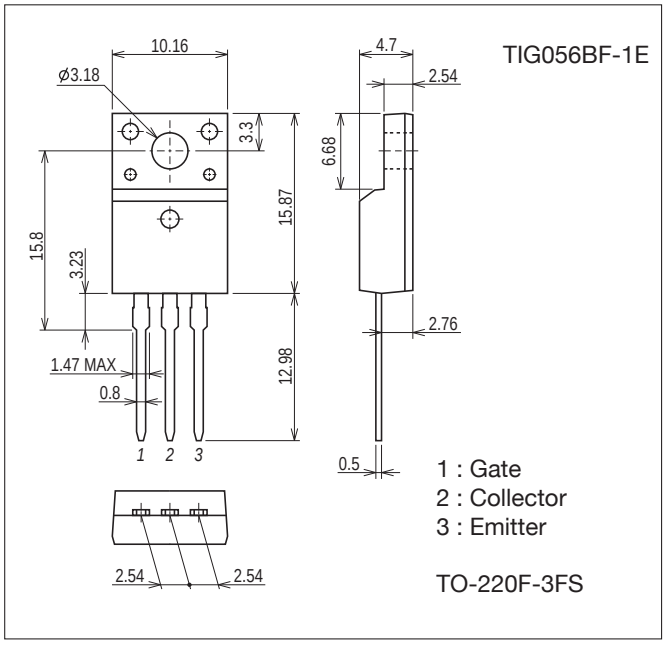

Ordering & Package Information

Device	Package	Shipping	memo
TIG056BF-1E	TO-220F-3FS SC-67	50 pcs./magazine	Pb-Free

Marking



Electrical Connection



Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector to Emitter Breakdown Voltage	$V_{(BR)CES}$	I_C=2mA, V_{GE}=0V	430			V
Collector to Emitter Cutoff Current	I_{CES}	V_{CE}=320V, V_{GE}=0V			100	μA
Gate to Emitter Leakage Current	I_{GES}	V_{GE}=±30V, V_{CE}=0V			±10	μA
Gate to Emitter Threshold Voltage	V_{GE}(off)	V_{CE}=10V, I_C=1mA	2.5		5.0	V
Collector to Emitter Saturation Voltage	V_{CE}(sat)	I_C=240A, V_{GE}=15V		3.6	5.0	V
Input Capacitance	Cies	V_{CE}=20V, f=1MHz		5500		pF
Output Capacitance	Coes			100		pF
Reverse Transfer Capacitance	Cres			70		pF
Turn-ON Delay Time	t_d(on)	V_{CE}=320V, I_C=240A, V_{GE}=15V, R_G=10Ω		46		ns
Rise Time	t_r			32		ns
Turn-OFF Delay Time	t_d(off)			140		ns
Fall Time	t_f			270		ns

Fig1 Large Current R Load Switching Circuit

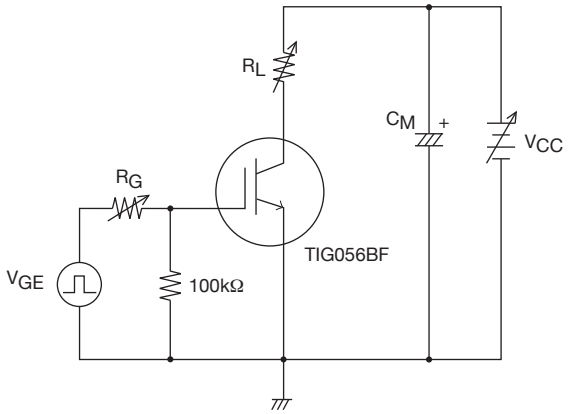

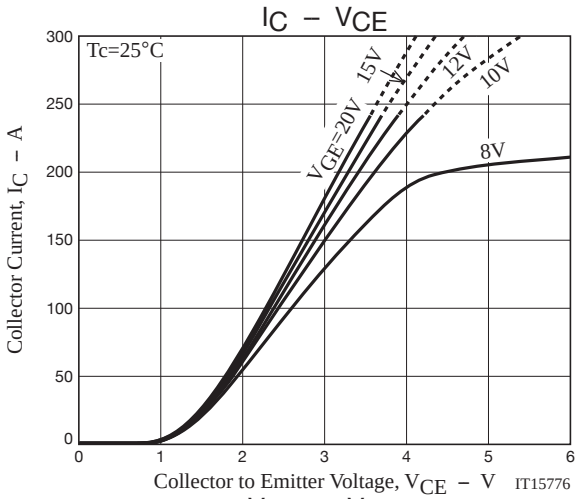
IC – VCE
Tc=25°C
VGE=20V
15V
12V
10V
8V
Collector Current, IC – A
Collector to Emitter Voltage, VCE – V
IT15776

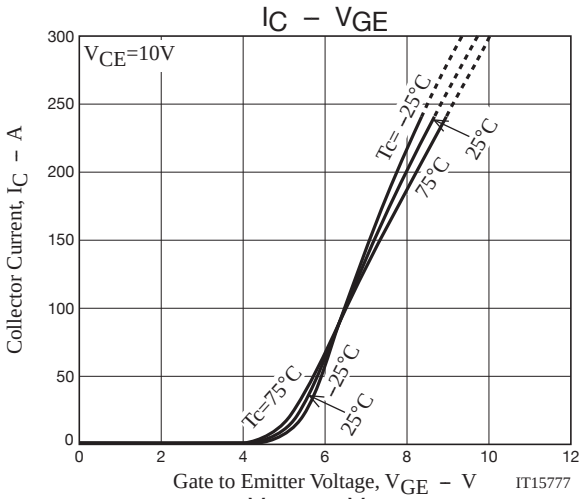
IC – VGE
VCE=10V
Tc= –25°C
25°C
75°C
Tc=75°C
–25°C
25°C
Collector Current, IC – A
Gate to Emitter Voltage, VGE – V
IT15777

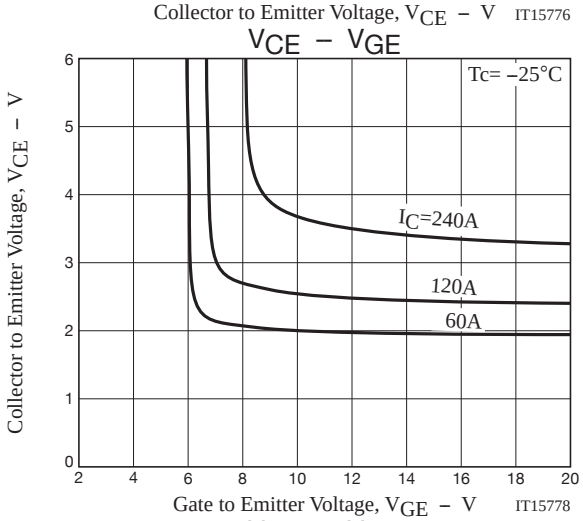
VCE – VGE
Tc= –25°C
IC=240A
120A
60A
Collector to Emitter Voltage, VCE – V
Gate to Emitter Voltage, VGE – V
IT15778

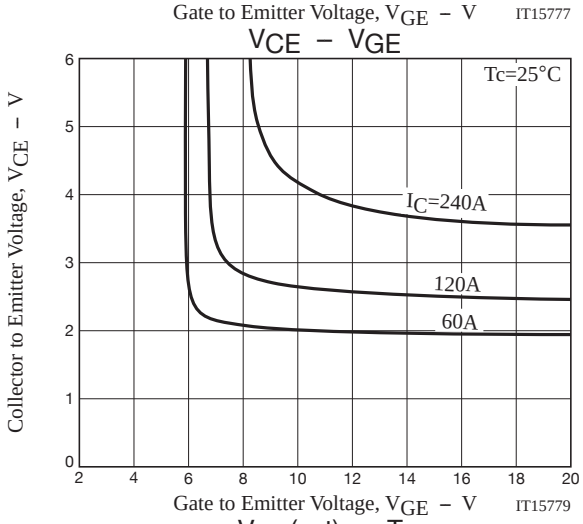
VCE – VGE
Tc=25°C
IC=240A
120A
60A
Collector to Emitter Voltage, VCE – V
Gate to Emitter Voltage, VGE – V
IT15779

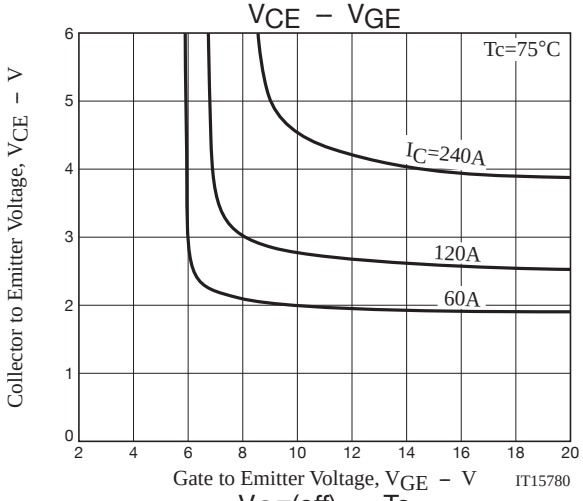
VCE – VGE
Tc=75°C
IC=240A
120A
60A
Collector to Emitter Voltage, VCE – V
Gate to Emitter Voltage, VGE – V
IT15780

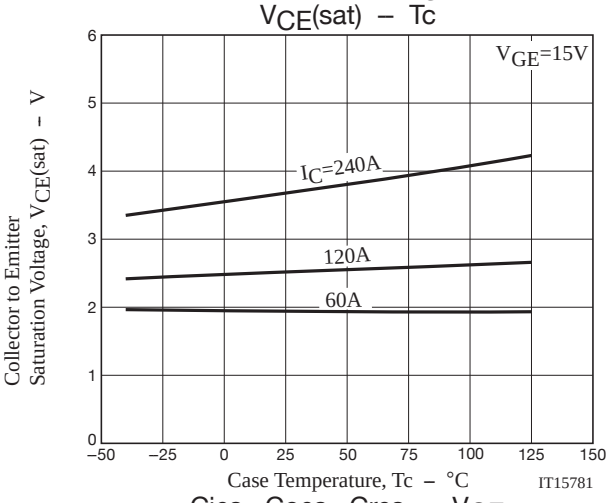
VCE(sat) – Tc
VGE=15V
IC=240A
120A
60A
Collector to Emitter Saturation Voltage, VCE(sat) – V
Case Temperature, Tc – °C
IT15781

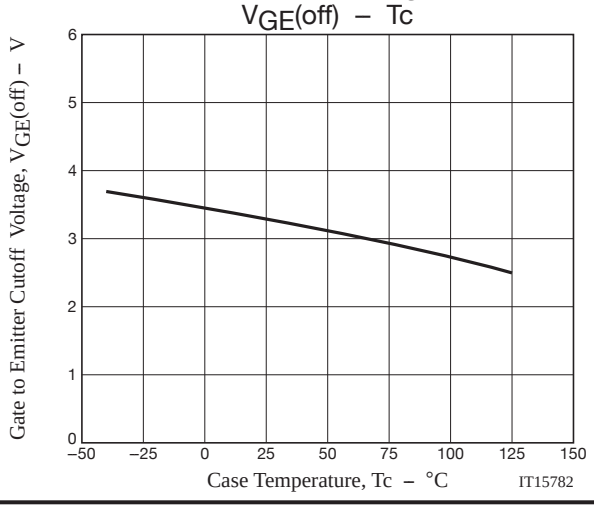
VGE(off) – Tc
Gate to Emitter Cutoff Voltage, VGE(off) – V
Case Temperature, Tc – °C
IT15782

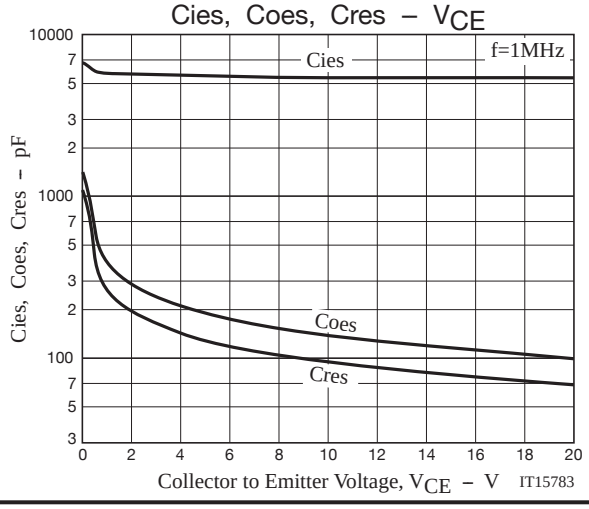
Cies, Coes, Cres – VCE
f=1MHz
Cies
Coes
Cres
Cies, Coes, Cres – pF
Collector to Emitter Voltage, VCE – V
IT15783

SW Time – I_{CP}

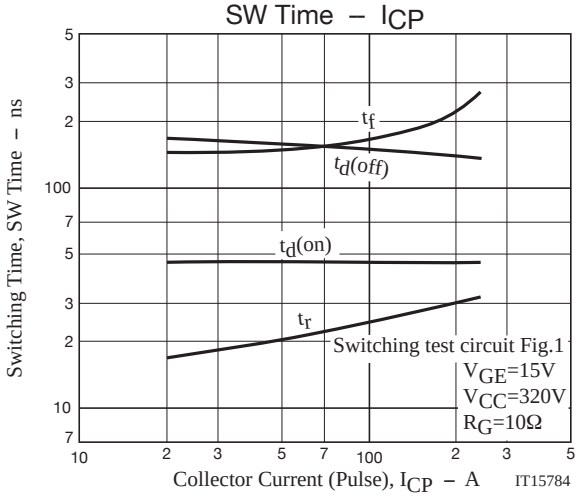

SW Time – R_G

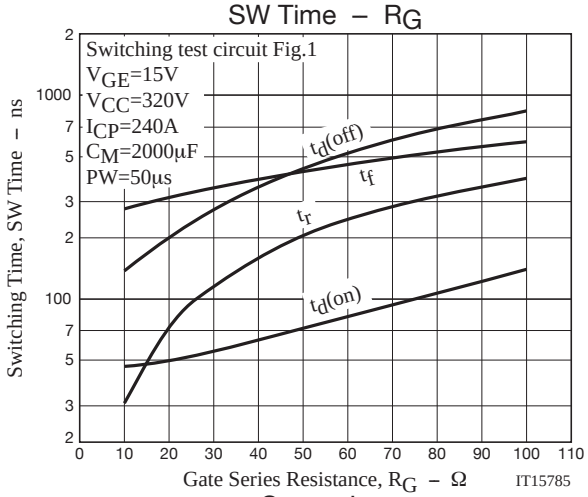

I_{CP} – V_{GE}

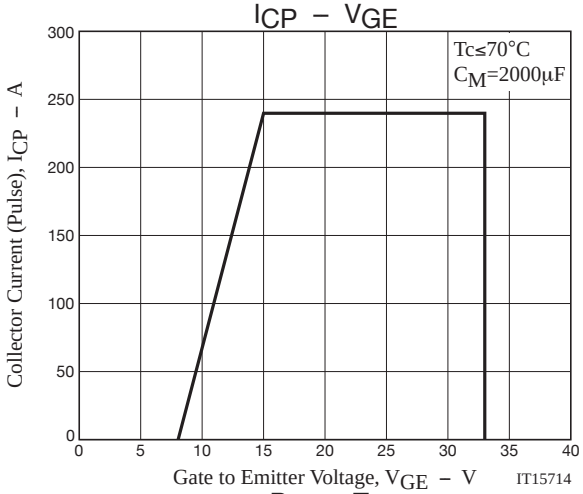

C_M – I_{CP}

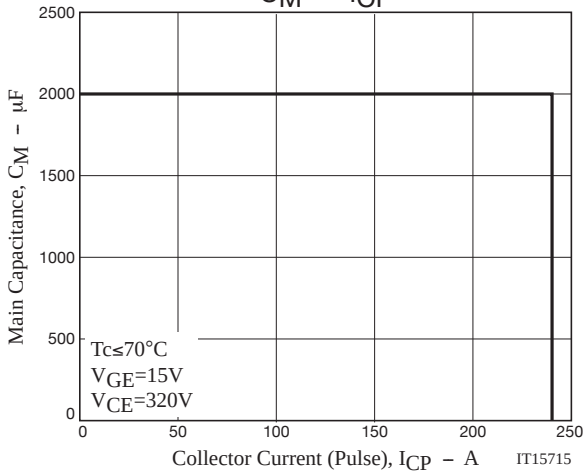

P_D – Tc

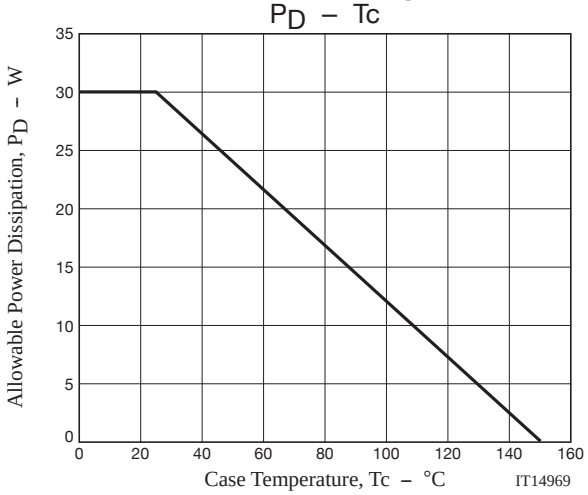

Outline Drawing

TIG056BF-1E

Mass (g)	Unit
1.8 * For reference	mm

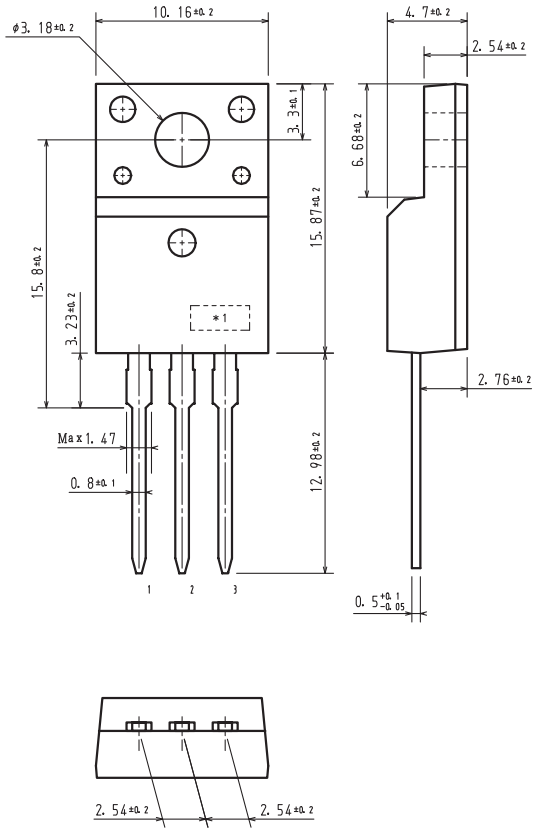

Note on usage : TIG056BF has protection diode between gate and emitter but handling it requires sufficient care to be taken.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9