

Interface Connectors for Factory Automation Network

HR31 Series

Complies with Device Net requirements

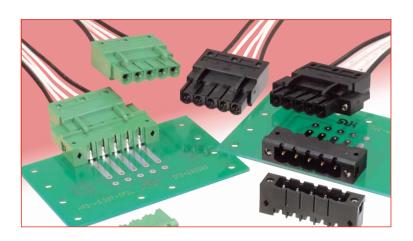



Features

1. Device-Net Compliant

Conforms to requirements of Factory Automation Network Device-Net standards. Hirose products are distinct from products of made others, as described below.

Feature	Made by others	Hirose HR31		
Reduced number of termination operations	Crimped to commercially available cap connectors, inserted into housing and fastened by screw.	Crimped and connected to terminal then fastened simply by inserting into housing.		
High density mounting	Plug height : 15 mm	Plug height is 10.2 mm, allowing use of less space when mounting several connectors		
Prevention of connection errors	Contact positions not identified.	Permanently identified contact positions		
Number of required operations to secure receptacle assembly to the board	Connectors are attached by screws from the opposite side.	No need for screws, built-in locking pin secures connector to the board		

2 Locking features

The connectors can be supplied with either of the following locking features:

- -Screw lock, using attached screws.
- -Snap lock, using built-in feature with a definite click-sensation.

3. Commercially available tools may be used


Use crimp tools conforming to JIS C 9711 standards. Terminated contacts can be removed using 1 mm dia. steel pin. and re-inserted.

4. Prevention of deformation of the contacts

When fully inserted, the plug contacts are fully protected by the walls of the insulator body eliminating a risk of accidental damage.

Applications

Power units and communications units of factory automation related devices

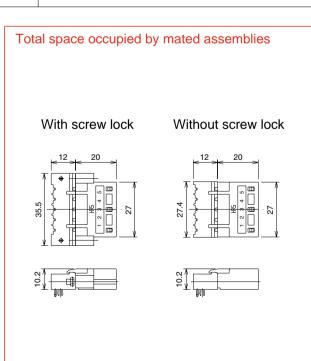

■ Product Specifications

Rating	Current rating	12A (2.5mm² wire) 10A (1.5mm² wire)	Operating temperature range	-40°C to +100°C
	Voltage rating	250V AC, 350V DC	Storage temperature range	-40°C to +85°C (Note 2)

Item	Specification	Conditions
1.Contact resistance	5 m ohms max.	1A DC
2.Insulation resistance	1000 M ohms min.	500 V DC
3.Withstanding voltage	No flashover or insulation breakdown	2000V AC/one minute
4.Impulse withstanding voltage	No flashover or insulation breakdown	Standard waveform of 4KV, positive/negative, 3 times each
5.Vibration	No electrical discontinuity of 10 μ s or more	Frequency: 10 to 55 Hz, single amplitude of 0.75 mm, 5 min. in each of the 3 directions, 10 cycles each
6.Durability (insertion/ withdrawal)	Contact resistance: 10 m ohms max.	1000 cycles
7.Temperature cycle	Insulation resistance: 1000 M ohms min.	Temperature: -40°C \rightarrow Room temperature to +100°C \rightarrow Room temperature Time: 30 \rightarrow 10 to 15 \rightarrow 30 \rightarrow 10 to 15 (Minutes) 5 cycles
8.Humidity	Insulation resistance: 10 M ohms min. (Humidity state) 100 M ohms min. (Dry state)	96 hours at temperature of 40°C and humidity of 90% to 95%

■ Materials

	Part	Material	Finish	Remarks
Plug	Insulator	PBT	Color: Black or Green	UL94V-0
Flug	Screw	Steel	Nickel plating	
Crimp contact	ontact Socket contact , ,		Contact area: gold plating Termination area: tin plating	
	Insulator	PBT	Color: Black or Green	UL94V-0
Receptacle	Male contact	Brass	Contact area: gold plating Termination are: gold plating	
	Nut	Steel	Nickel plating	
	Board retention pin	Phosphor bronze	Tin plating	

■ Ordering information

●Connector

$$\frac{\mathsf{HR31}}{\bullet} \ \ \ \overset{5.08}{\bullet} \ \ \overset{\mathsf{P}}{\bullet} \ \ \overset{\mathsf{A}}{\bullet} \ \ \overset{5}{\bullet} \ \ \overset{\mathsf{S}}{\bullet} \ \ \overset{\mathsf{C}}{\bullet} \ \ \overset{\mathsf{(01)}}{\bullet}$$

Series name	HR31	Contact type
Contact pitch	5.08mm	S: Female contact
6 Connector type	P: Plug	P: Male contact
	R: Receptacle	Terminal type
Screw lock type	Blank: With screw	C: Crimping
	A: Without screw	DL: Right angle through hole type
6 No. of contacts	5	D: Straight through hole type
		8 Color, plating, board retention pin type


●Crimp contact


HR31	- SC	-	1	1	1	(01)
0	<u> </u>		4	1	13	A

Series name	HR31	Plating type	
Contact type	SC: female contact	1: Gold plating	
Contact packaging	g type 1: loose contact		
Conductor cross	sarea	Suffix	
1: 1.04 to	2.63mm²		
2: 0.25 to	1.65mm²		

■ Plug (with screw lock)








Part No.	CL No.	Weight	Color	RoHS
HR31-5.08P-5SC(71)	131-0002-2-71	0.0	Black	YES
HR31-5.08P-5SC(72)	131-0002-2-72	- 8g	Green	TES


Plug (without screw lock)





Part No.	CL No.	Weight	Color	RoHS
HR31-5.08PA-5SC	131-0009-1	6~	Black	VEC
HR31-5.08PA-5SC(01)	131-0009-1-01	6g	Green	YES

■ Crimp contact




Part No.	CL No.	φA	Weight	Contact plating	Applicable conductor cross area (Note 2)	RoHS
HR31-SC-111(71)	131-0004-8-71	4	4	Cald	1.04 to 2.63mm ²	VEC
HR31-SC-121(71)	131-0005-0-71	3.3	1g	Gold 0.2 to 1.65mm ²		YES

Note 1: Bag packaging (100 pieces/bag)

Note 2: For a multi-strand conductors

■ Receptacle (Right angle through hole type with screw lock)






Part No.	CL No.	Weight	Color	Contact plating	Board retention pin	RoHS
HR31-5.08R-5PDL(72)	131-0001-0-72		Black	0.11	With	YES
HR31-5.08R-5PDL(74)	131-0001-0-74	4			Without	
HR31-5.08R-5PDL(75)	131-0001-0-75	4g	0	Gold	With	TES
HR31-5.08R-5PDL(76)	131-0001-0-76		Green		Without	

Receptacle (Right angle through hole type without screw lock)






Part No.	CL No.	Weight	Color	Contact plating	Board retention pin	RoHS
HR31-5.08RA-5PDL(72)	131-0008-9-72	0.5	Disale	Oald	With	V/50
HR31-5.08RA-5PDL(74)	131-0008-9-74		Black		Without	
HR31-5.08RA-5PDL(75)	131-0008-9-75	2g	Croon	Gold	With	YES
HR31-5.08RA-5PDL(76)	131-0008-9-76		Green		Without	

●PCB mounting pattern

With screw lock

$.5\pm0.05$ \oplus 10.16±0.05 10.16±0.05 15.24±0.05 15.24±0.05 Connector mounting side (Board thickness =1.6)


Without screw lock



Note: Dia. 2.3 through hole is not required on the board when using connectors without the retention pin.

■ Receptacle (Straight through hole type with screw lock)







Part No.	CL No.	Weight	Color	Contact plating	Board retention pin	RoHS
HR31-5.08R-5PD(72)	131-0003-5-72	- 4g	Black	0.14	With	VEC
HR31-5.08R-5PD(74)	131-0003-5-74				Without	
HR31-5.08R-5PD(75)	131-0003-5-75		Green	Gold	With	YES
HR31-5.08R-5PD(76)	131-0003-5-76		Green		Without	

Receptacle (Straight through hole type without screw lock)










Part No.	CL No.	Weight	Color	Contact plating	Board retention pin	RoHS	
HR31-5.08RA-5PD(72)	131-0016-7-72	- 2g	Disale		With		
HR31-5.08RA-5PD(74)	131-0016-7-74]	Black	0-14	Without	VEC
HR31-5.08RA-5PD(75)	131-0016-7-75		Croon	Gold	With	YES	
HR31-5.08RA-5PD(76)	131-0016-7-76		Green		Without		

◆PCB mounting pattern

With screw lock

3.8 ± 0.05 5.08±0.05 5.08±0.05 10.16±0.05 10.16±0.05 15.24±0.05 15.24±0.05 Connector mounting side B (Board thickness =1.6)

Without screw lock




Note: Dia. 2.3 through hole is not required on the board when using connectors without the retention pin.

■ Tools

Туре	Part No.	CL No.	
Manual crimp tool	HR31-TC-01	150-0217-7	
Contact removal pin	HR31-SC-TP	150-0215-1	






Tools application procedures

1. Manual contact crimp tool

The tool will terminate all specified crimp contacts. Placement of correct contact in corresponding crimp position on the tool is critical. The positions are clearly indicated on the tool as (2) and (1.25). The exposed conductor strip length is 5mm.


Crimp position indicator	Applicable crimp contact	
2	HR31-SC-113 or HR31-SC-111	
1.25	HR31-SC-123 or HR31-SC-121	

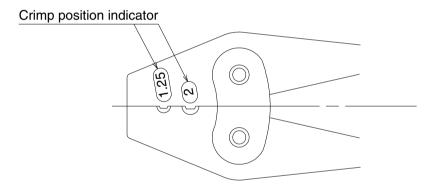

2. Contact removal pin


Contact removal pin provides easy method of contact removal from plug assembly.

- 1) Fully insert the long end of the contact removal pin into the opening in the insulator.
- 2) Move the pin forward, in the direction of the mating face. This will cause the terminated contact to move in opposite direction.
- 3) Pull out the wire with the attached crimped contact.

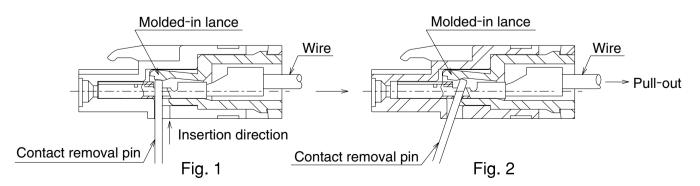


Usage Precautions

- 1. To prevent damage, align receptacle with the panel and board in such a way that it is not subject to excess loads.
 - 1.1 Recommended mounting panel dimensions (right angle through hole type)

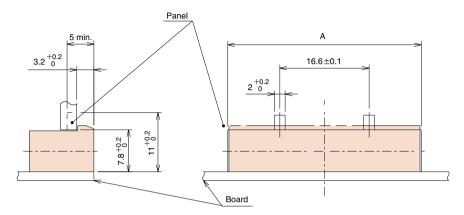


Part No.	А
HR31-5.08R-5PDL(**)	36 +0.2
HR31-5.08RA-5PDL(**)	27.9 +0.2

1.2 Recommended mounting panel dimensions (straight through hole type)

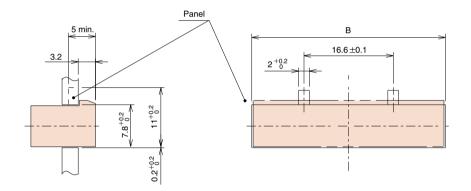

Part No.	В
HR31-5.08R-5PD(**)	36 +0.2
HR31-5.08RA-5PD(**)	27.9 +0.2

2. Insert the crimp contact into the plug in the direction shown below.



- 3. Use a number 0 cross drive bit to tighten the screw lock's screw.
- 4. Assure that the circuit's power is off when mating and un-mating connectors.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru 4 moschip.ru 9