

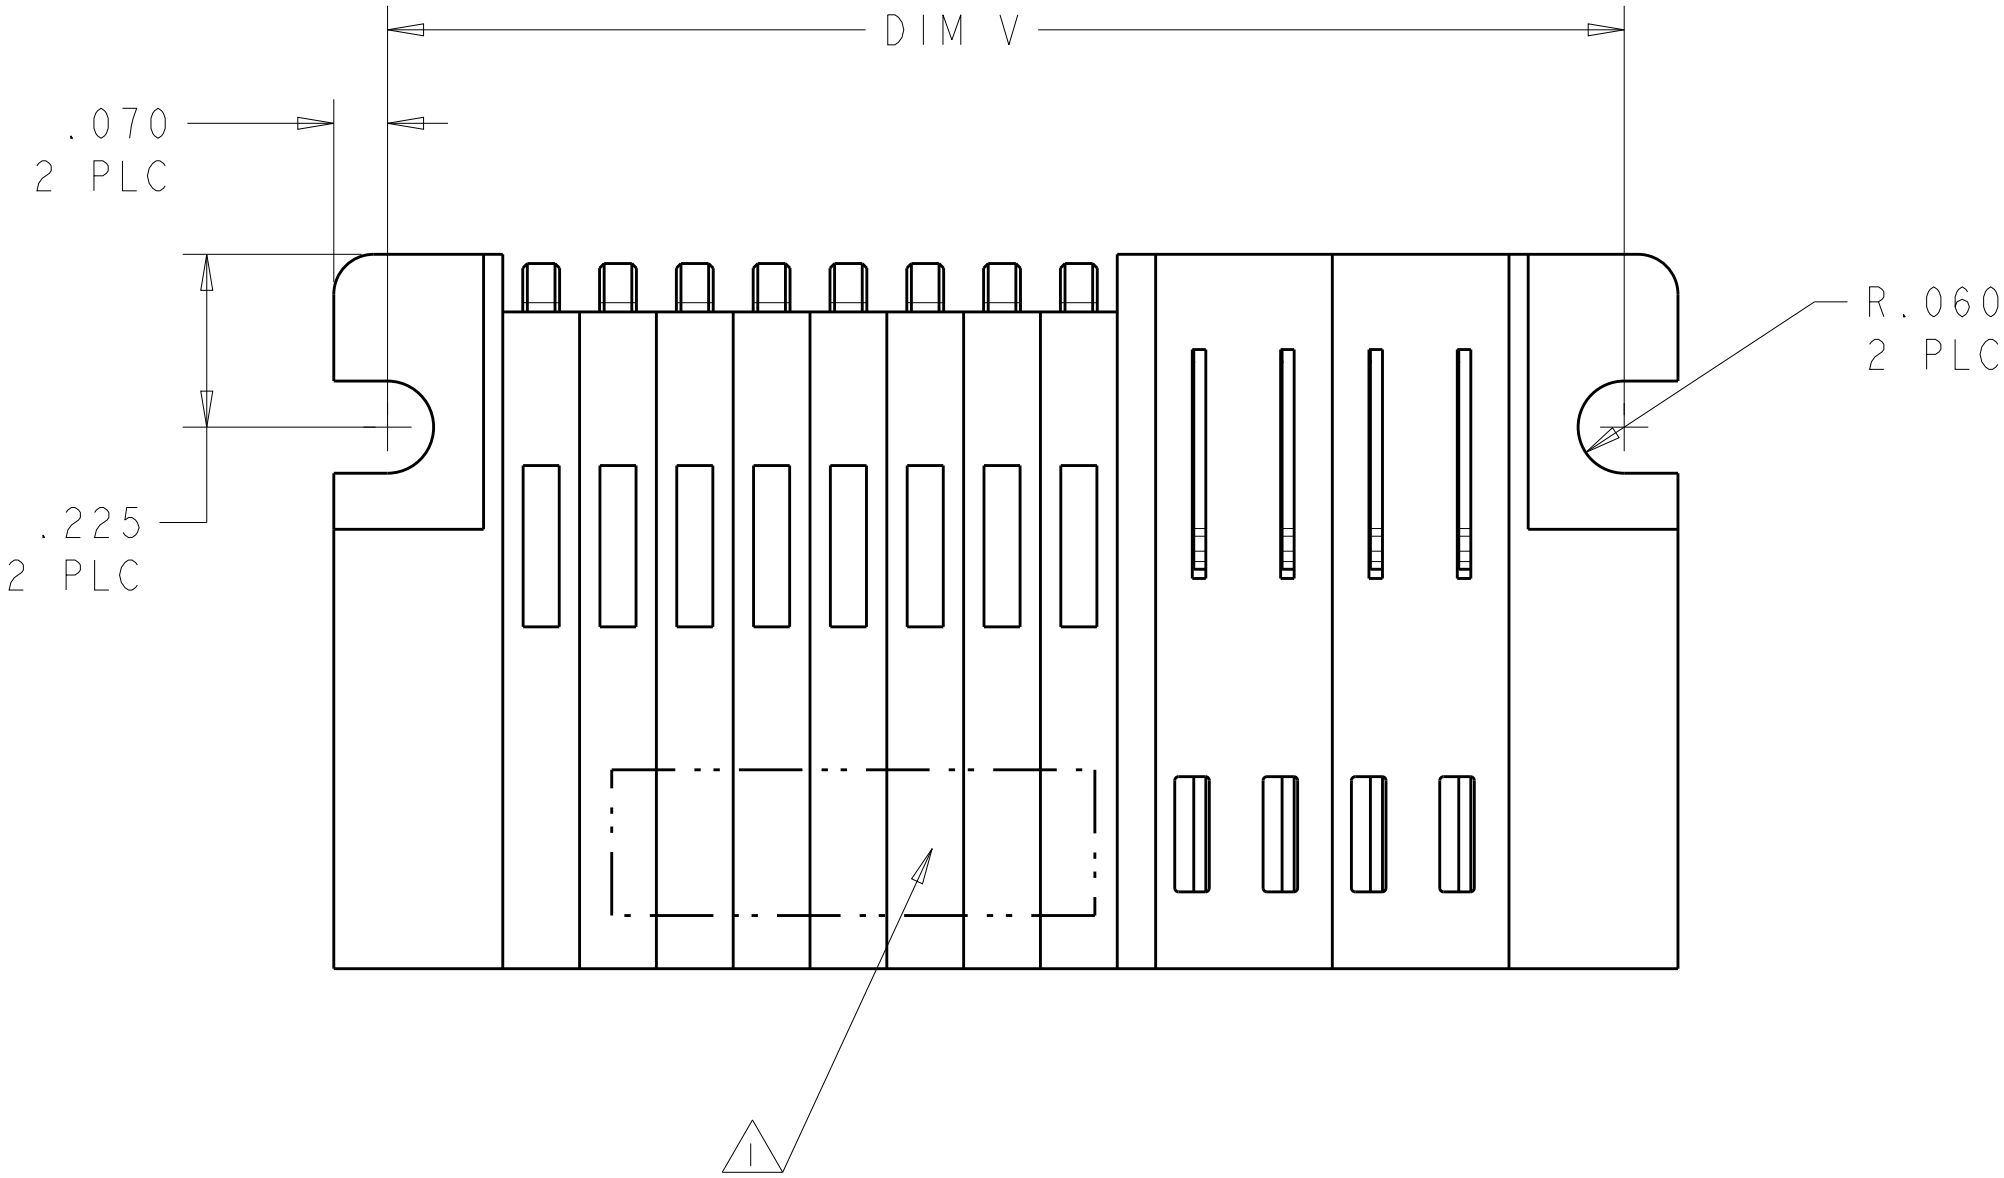
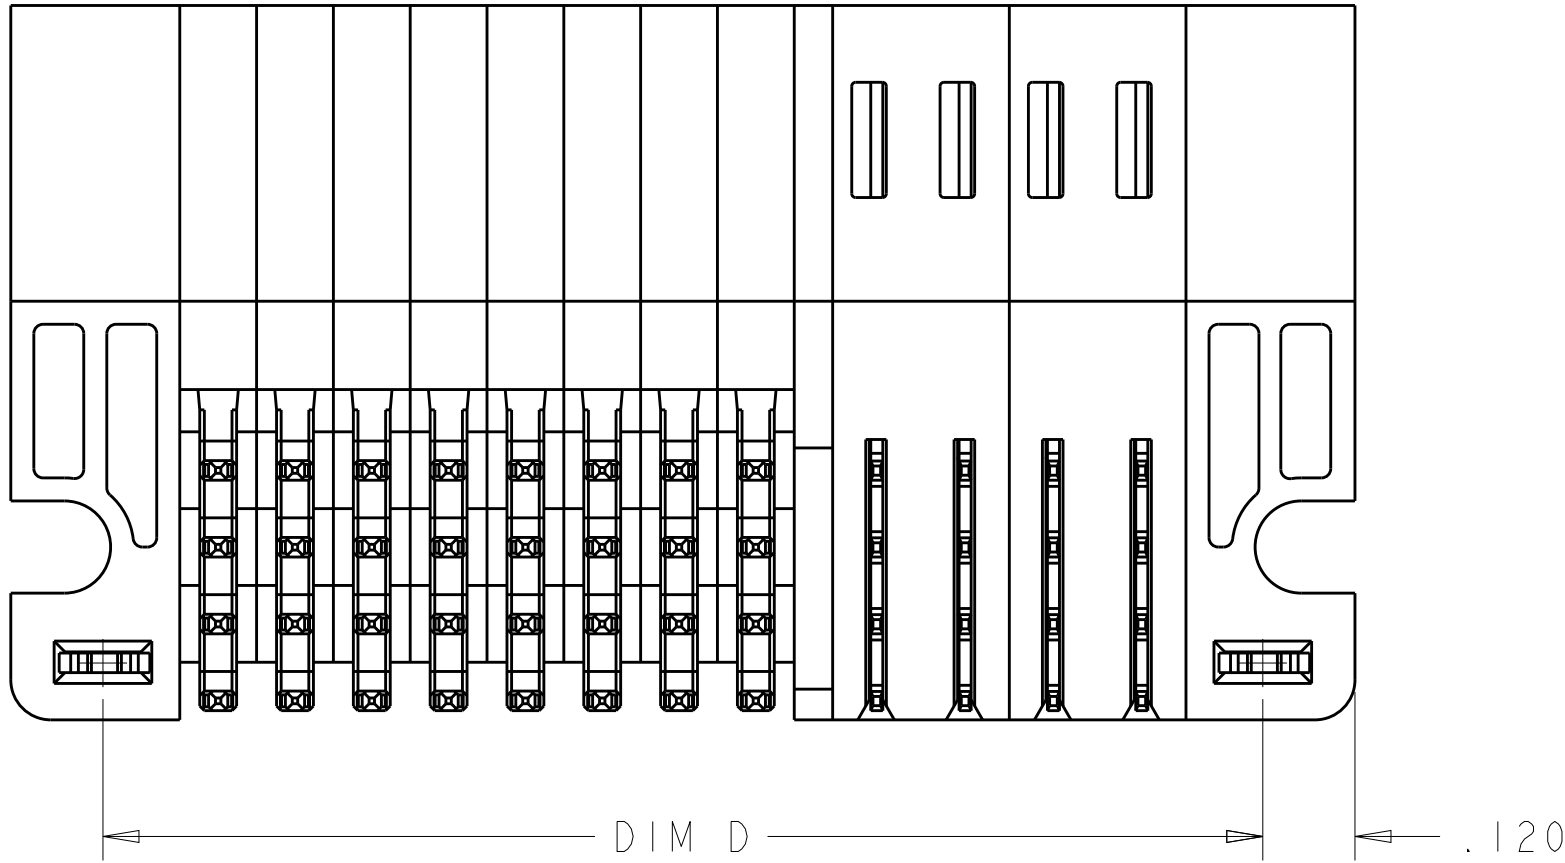


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			L1	REVISED FOR 2-6	14MAY2014	CZ	SZ
			L5	ADD NEW DASH NUMBER 3-4	22SEP2014	CZ	SZ
			L6	ADD 3-6 PER ECO-14-018856	31DEC2014	CZ	SZ

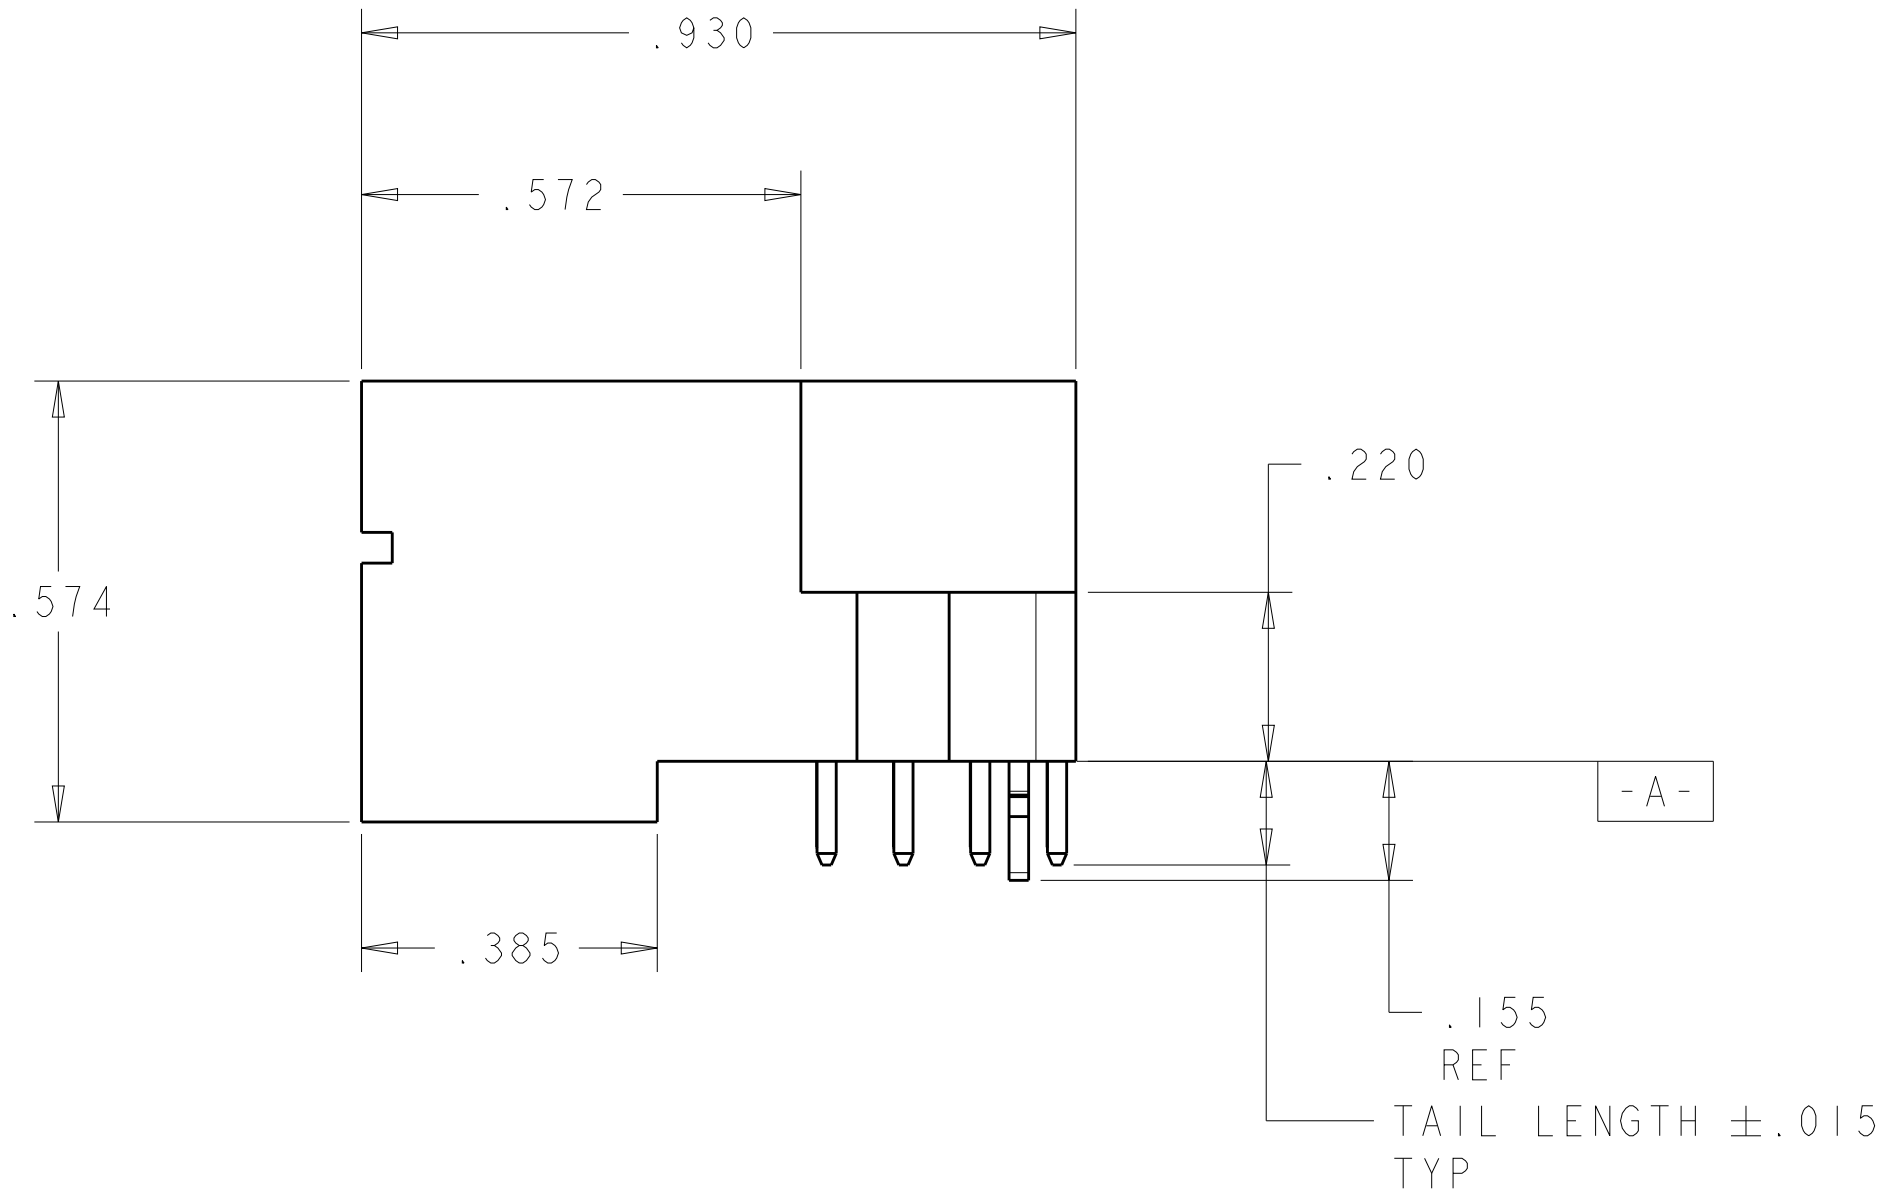


- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER
AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 FOR "S+P" CONFIGURATION , VARIABLE DIMENSIONS PLEASE REFER TO SHEET 2.
- 9 VARIABLE DIMENSIONS PLEASE SEE TABLE.

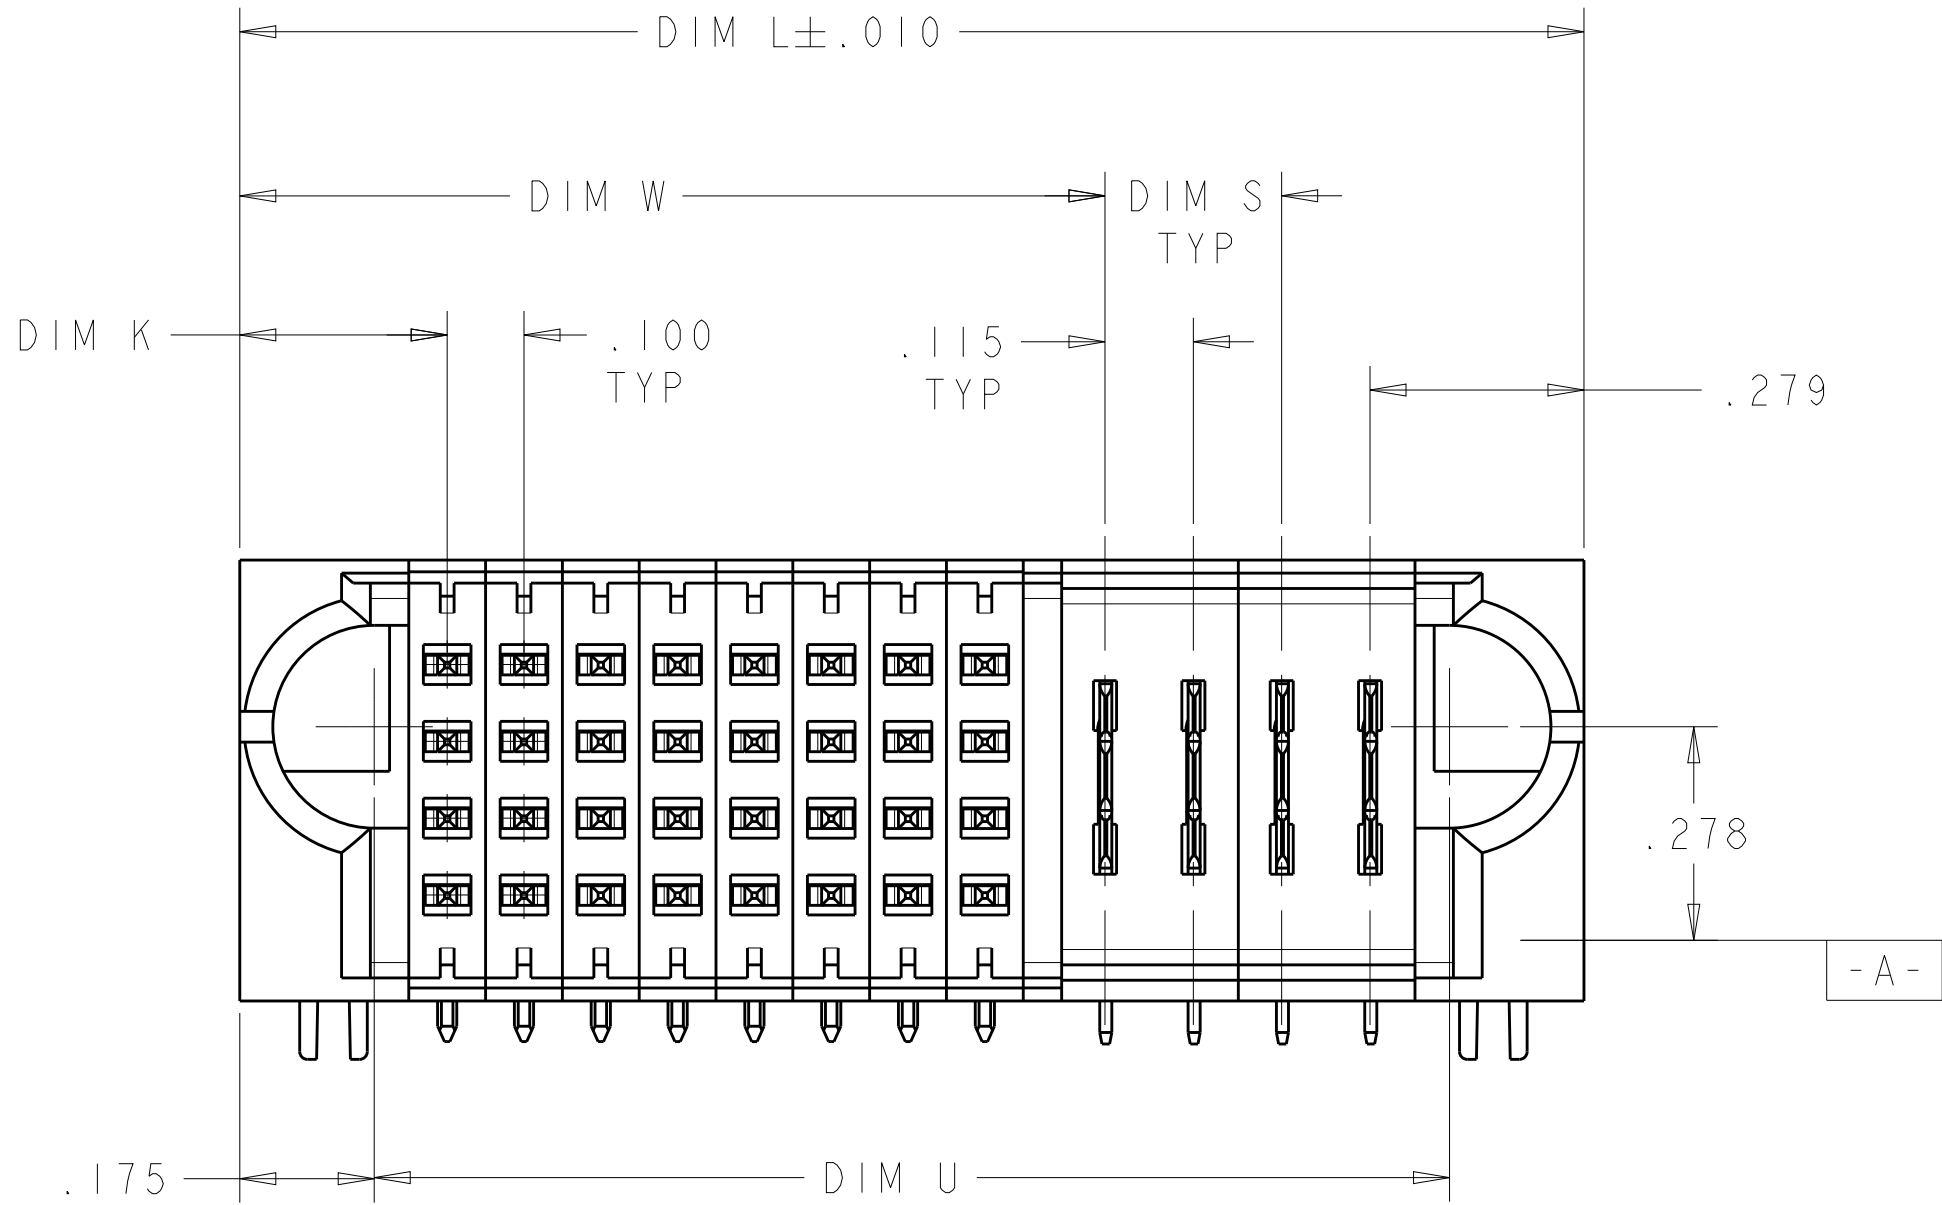

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. ZHOU CHK S. ZHAO APVD S. YAO	15OCT2007 15OCT2007 -	TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		0 PLC	±"	PRODUCT SPEC	SIZE A1
		1 PLC	±.01	108-2292	
		2 PLC	±.01	108-13038	
MATERIAL		FINISH		WEIGHT	CAGE CODE 6450831
2		3		Customer Drawing	
				SCALE 4:1	SHEET 1 OF 17
				REV L7	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

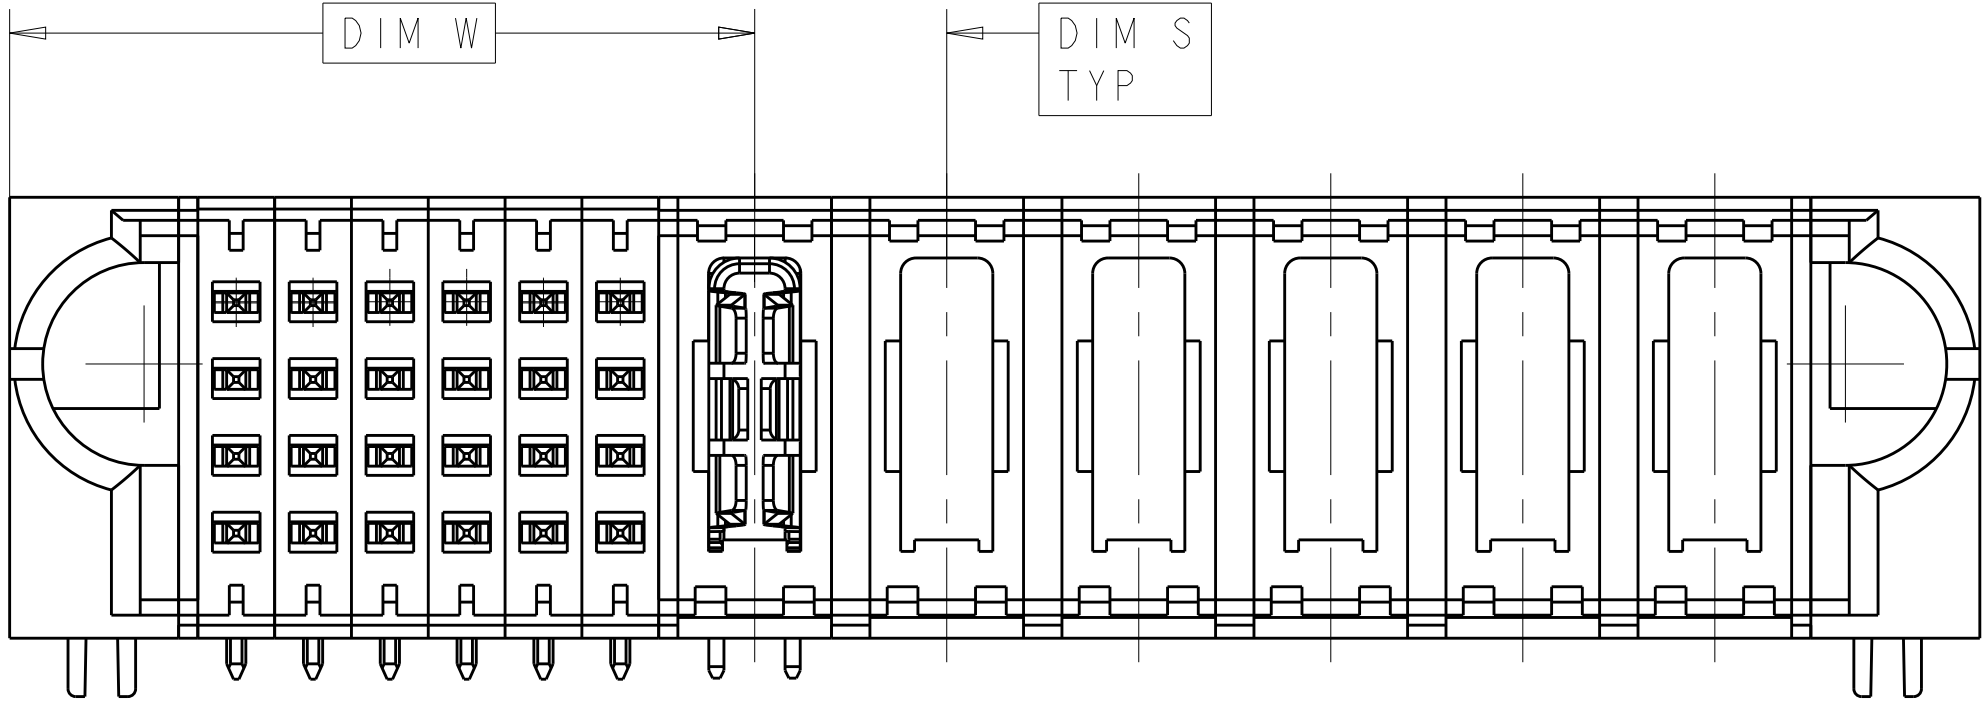


 FOR "S+P" CONFIGURATION
UNSPECIFIED DIMENSIONS REFER TO SHEET 1

(L6)	.600	.700	.490	-	-	.270	.840	16S	3-6450831-6
	3.800	3.900	3.690	.200	3.120	.270	4.040	112S + 4HDP	3-6450831-4
	2.920	3.020	2.810	.250 	.845 	.270	3.160	20S + 4P + 3LP	3-6450831-0
	2.250	2.350	2.140	.200 	.745 	.270	2.490	16S + 8HDP	2-6450831-9
	3.450	3.550	3.340	.300 	1.220 	.270	3.690	32S + 8ACP	2-6450831-8
	2.250	2.350	2.140	.300 	1.220 	.270	2.490	32S + 4ACP	2-6450831-7
	1.750	1.850	1.640	.9 	.745 	.270	1.990	16S + 4P	2-6450831-6
	4.125	4.225	4.015	.375 	.995 	.270	4.365	24S + 9P	2-6450831-5
	2.800	2.900	2.690	.250 	.945 	.270	3.040	24S + 8P	2-6450831-4
	3.225	3.325	3.115	.200 	.945 	.270	3.465	24S + 12HDP	2-6450831-3
	4.400	4.500	4.290	.8 	- .9 	1.995	.270	64S+4P+2HDP+5P	2-6450831-2
	.875	.975	.765	-	-	.345	1.115	24S	2-6450831-1
	.875	.975	.765	-	-	.345	1.115	24S	2-6450831-0
	1.625	1.725	1.515	.200 	.945 	.270	1.865	24S + 4P	1-6450831-9
	3.600	3.700	3.490	.250	.770	.295	3.840	16S + 12P	1-6450831-8
	3.100	3.200	2.990	.250	.770	.295	3.340	16S + 10P	1-6450831-7
	3.100	3.200	2.990	.250	.770	.295	3.340	16S + 10P	1-6450831-6
	.600	.700	.490	-	-	.270	.840	16S	1-6450831-5
	4.500	4.600	4.390	.250 	1.145 	.270	4.74	32S + 14P	1-6450831-4
	3.250	3.350	3.140	.225 	1.145 	.270	3.490	32S + 10P	1-6450831-3
	3.300	3.400	3.190	.9 	1.170 	.270	3.540	32S + 10P	1-6450831-2
	.800	.900	.690	-	-	.270	1.040	24S	1-6450831-1
	2.325	2.425	2.215	.250 	.970 	.295	2.565	24S + 6P	6450831-9
	2.825	2.925	2.715	.250 	.970 	.295	3.065	24S + 8P	6450831-7
	2.325	2.425	2.215	.250 	.970 	.295	2.565	24S + 6P	6450831-6
	2.000	2.100	1.890	-	-	.270	2.240	72S	6450831-5
	.800	.900	.690	-	-	.270	1.040	24S	6450831-4
	5.405	5.505	5.295	-	5.2275	.295	5.645	196S + 2LP	6450831-3
	1.510	1.610	1.400	.230	1.1275	.270	1.750	32S + 4LP	6450831-1
	DIM D	DIM V	DIM U	DIM S	DIM W	DIM K	DIM L	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.0020
FINISH

MATERIAL

-

DWN
C. ZHOU
CHK
S. ZHAO
APVD
S. YAO

15OCT2007
15OCT2007
-

PRODUCT SPEC
108-2292
APPLICATION SPEC
108-13038
WEIGHT
-

Customer Drawing

NAME
R/A HEADER WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450831

RESTRICTED TO
-


SCALE
4:1

SHEET
2

OF
17

REV
L7

TE Connectivity

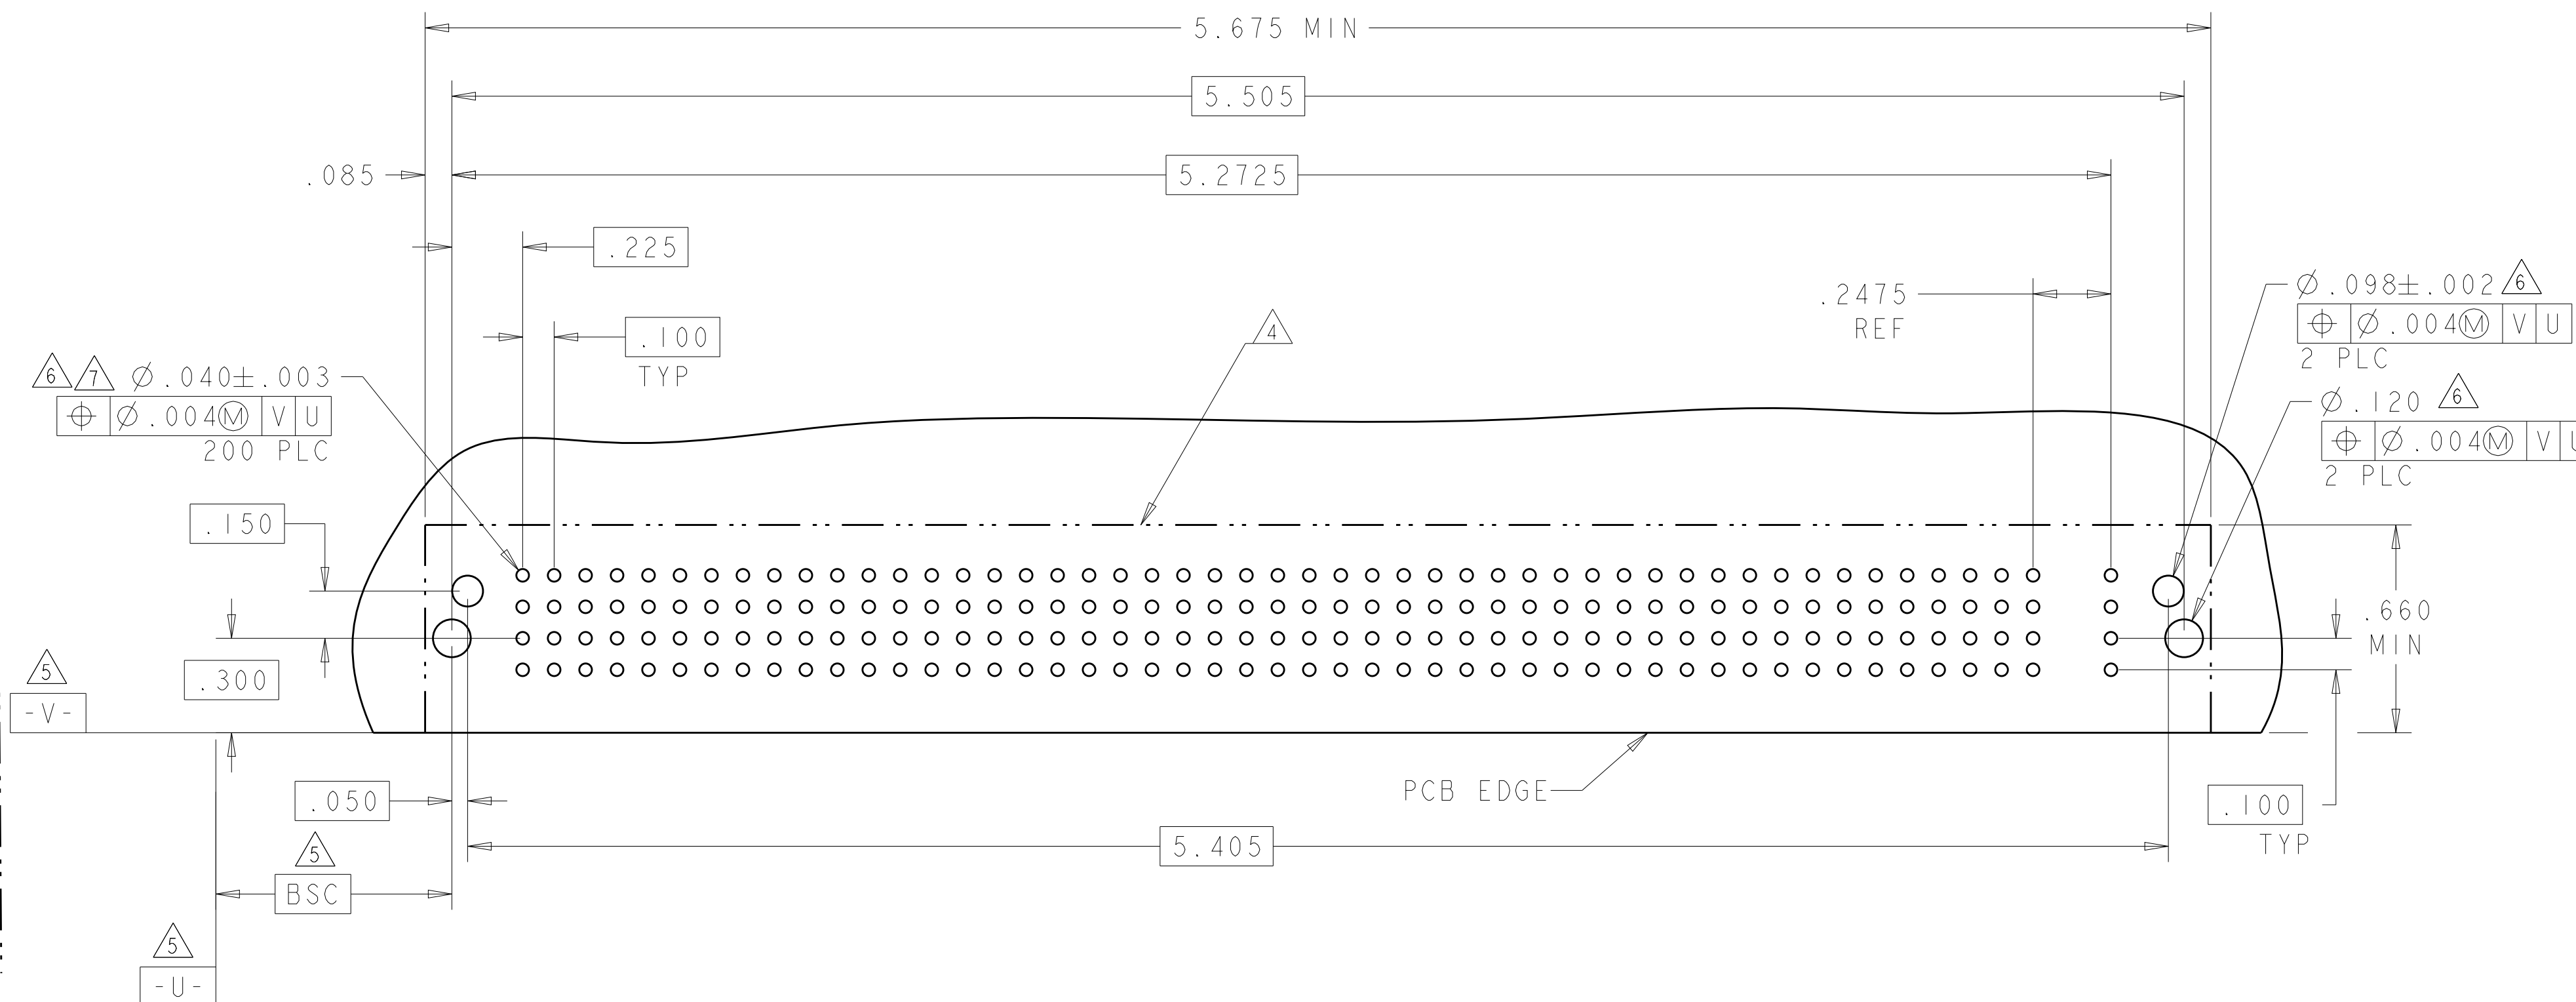
[illegible]

Technical drawing of a PCB edge view showing dimensions and tolerances. The drawing includes a central grid of 16 circular holes (4 rows by 4 columns) and two larger circular features on the left and right sides. Dimensions are provided in inches, with tolerances indicated by triangles and minimum values where applicable.

Key dimensions and tolerances:

- Overall width: 1.070 MIN
- Overall height: .660 MIN
- Top edge tolerance: $\triangle 6 \varnothing .040 \pm .003 / \triangle 7$
- Top edge material: $\oplus \varnothing .004 (M) V U$ 24 PLC
- Right edge tolerance: $\triangle 6 \varnothing .098 \pm .002$
- Right edge material: $\oplus \varnothing .004 (M) V U$ 2 PLC OPTIONAL
- Left edge tolerance: $\triangle 6 \varnothing .120$
- Left edge material: $\oplus \varnothing .004 (M) V U$ 2 PLC
- Bottom edge tolerance: $\triangle 5$
- Bottom edge material: $\oplus \varnothing .004 (M) V U$ 2 PLC
- Bottom edge label: -V-
- Bottom edge label: -U-
- Bottom edge label: BSC
- Bottom edge label: PCB EDGE
- Internal dimensions: .085, .200, .100 TYP, .150, .300, .050, .800, .100 TYP



MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	FS
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	E
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	F
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	G
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	H
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	J
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	K
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	N
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	S
3 BEAM STD POWER CONTACT, .135 TAIL LENGTH	TM
LOWER POWER CONTACT, .135 TAIL LENGTH,MFBL	LMF
LOWER POWER CONTACT, .135 TAIL LENGTH,STD	LM
DESCRIPTION	IDENTIFIER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 150C12001 CHG 150C12007 S. ZHAO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS: ±.010 FRACTIONS: ±.005 ANGLES: ±0°		NAME: R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		PRODUCT SPEC: 108-2292 APPLICATION SPEC: 108-13038		SIZE: CAGE CODE: DRAWING NO: A100779 © 6450831	
MATERIAL: - FINISH: -		WEIGHT: - Customer Drawing		RESTRICTED TO: - SCALE: 4:1 SHEET 3 OF 17 REV: L	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	SIGNAL																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
6450831-5	D	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
	C	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
	B	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G
	A	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S
72S																			


PART NUMBER	ROWS		SIGNAL						POWER						
			1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	
6450831-6	D		J	J	J	J	J	J							
	K		K	K	K	K	K								
	N		N	N	G	N	N								
	S		S	S	H	S	S								
24S + 6P															

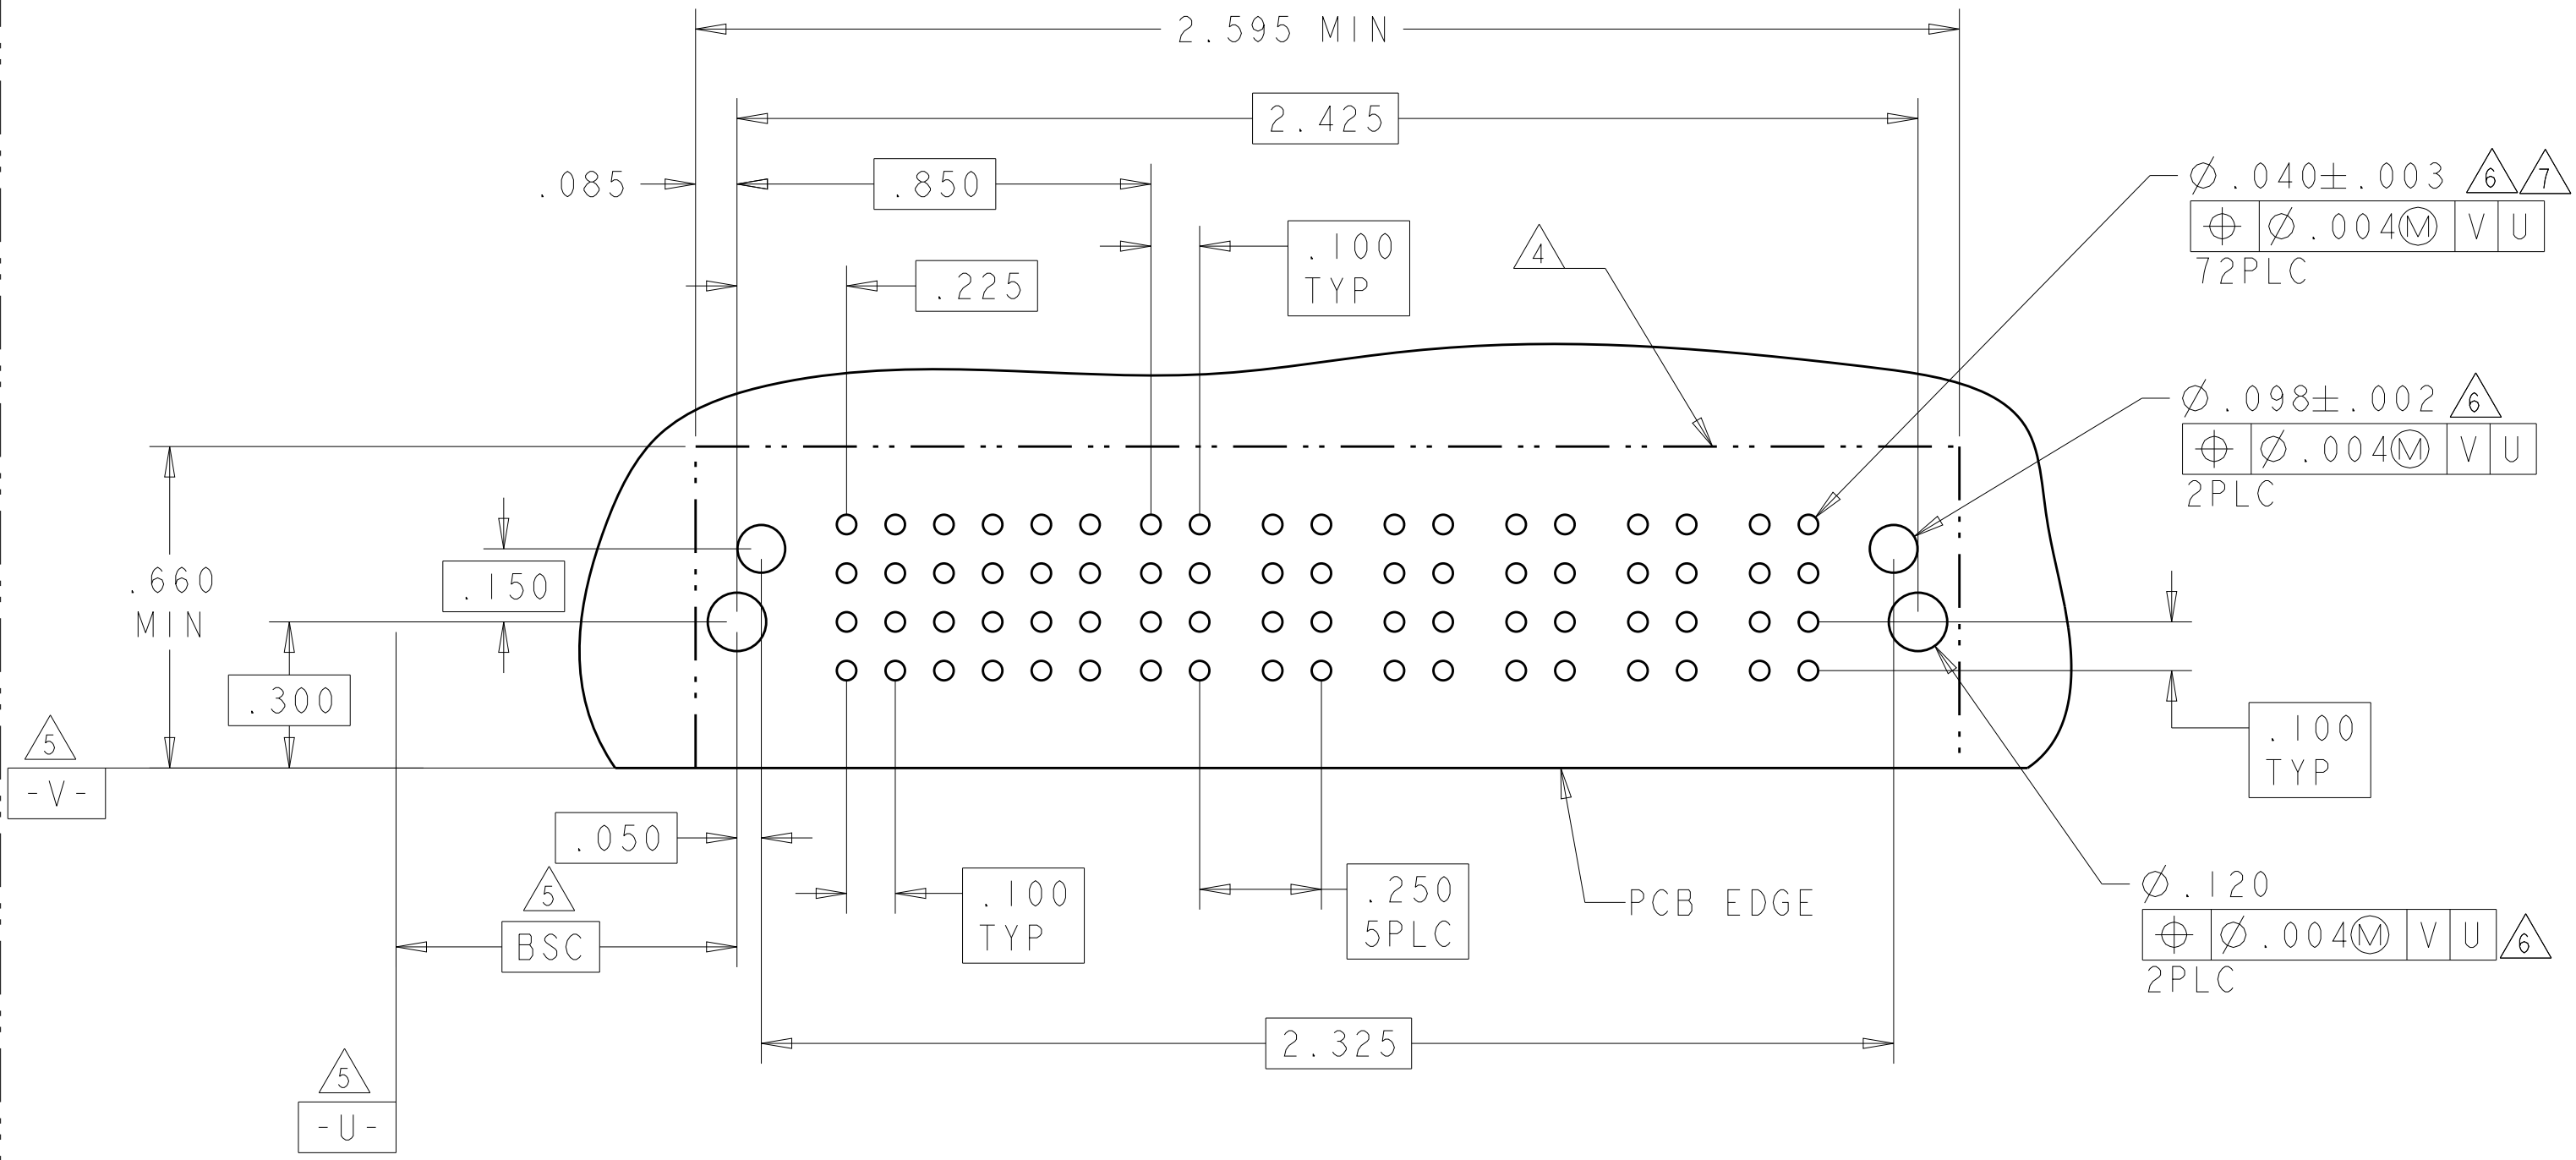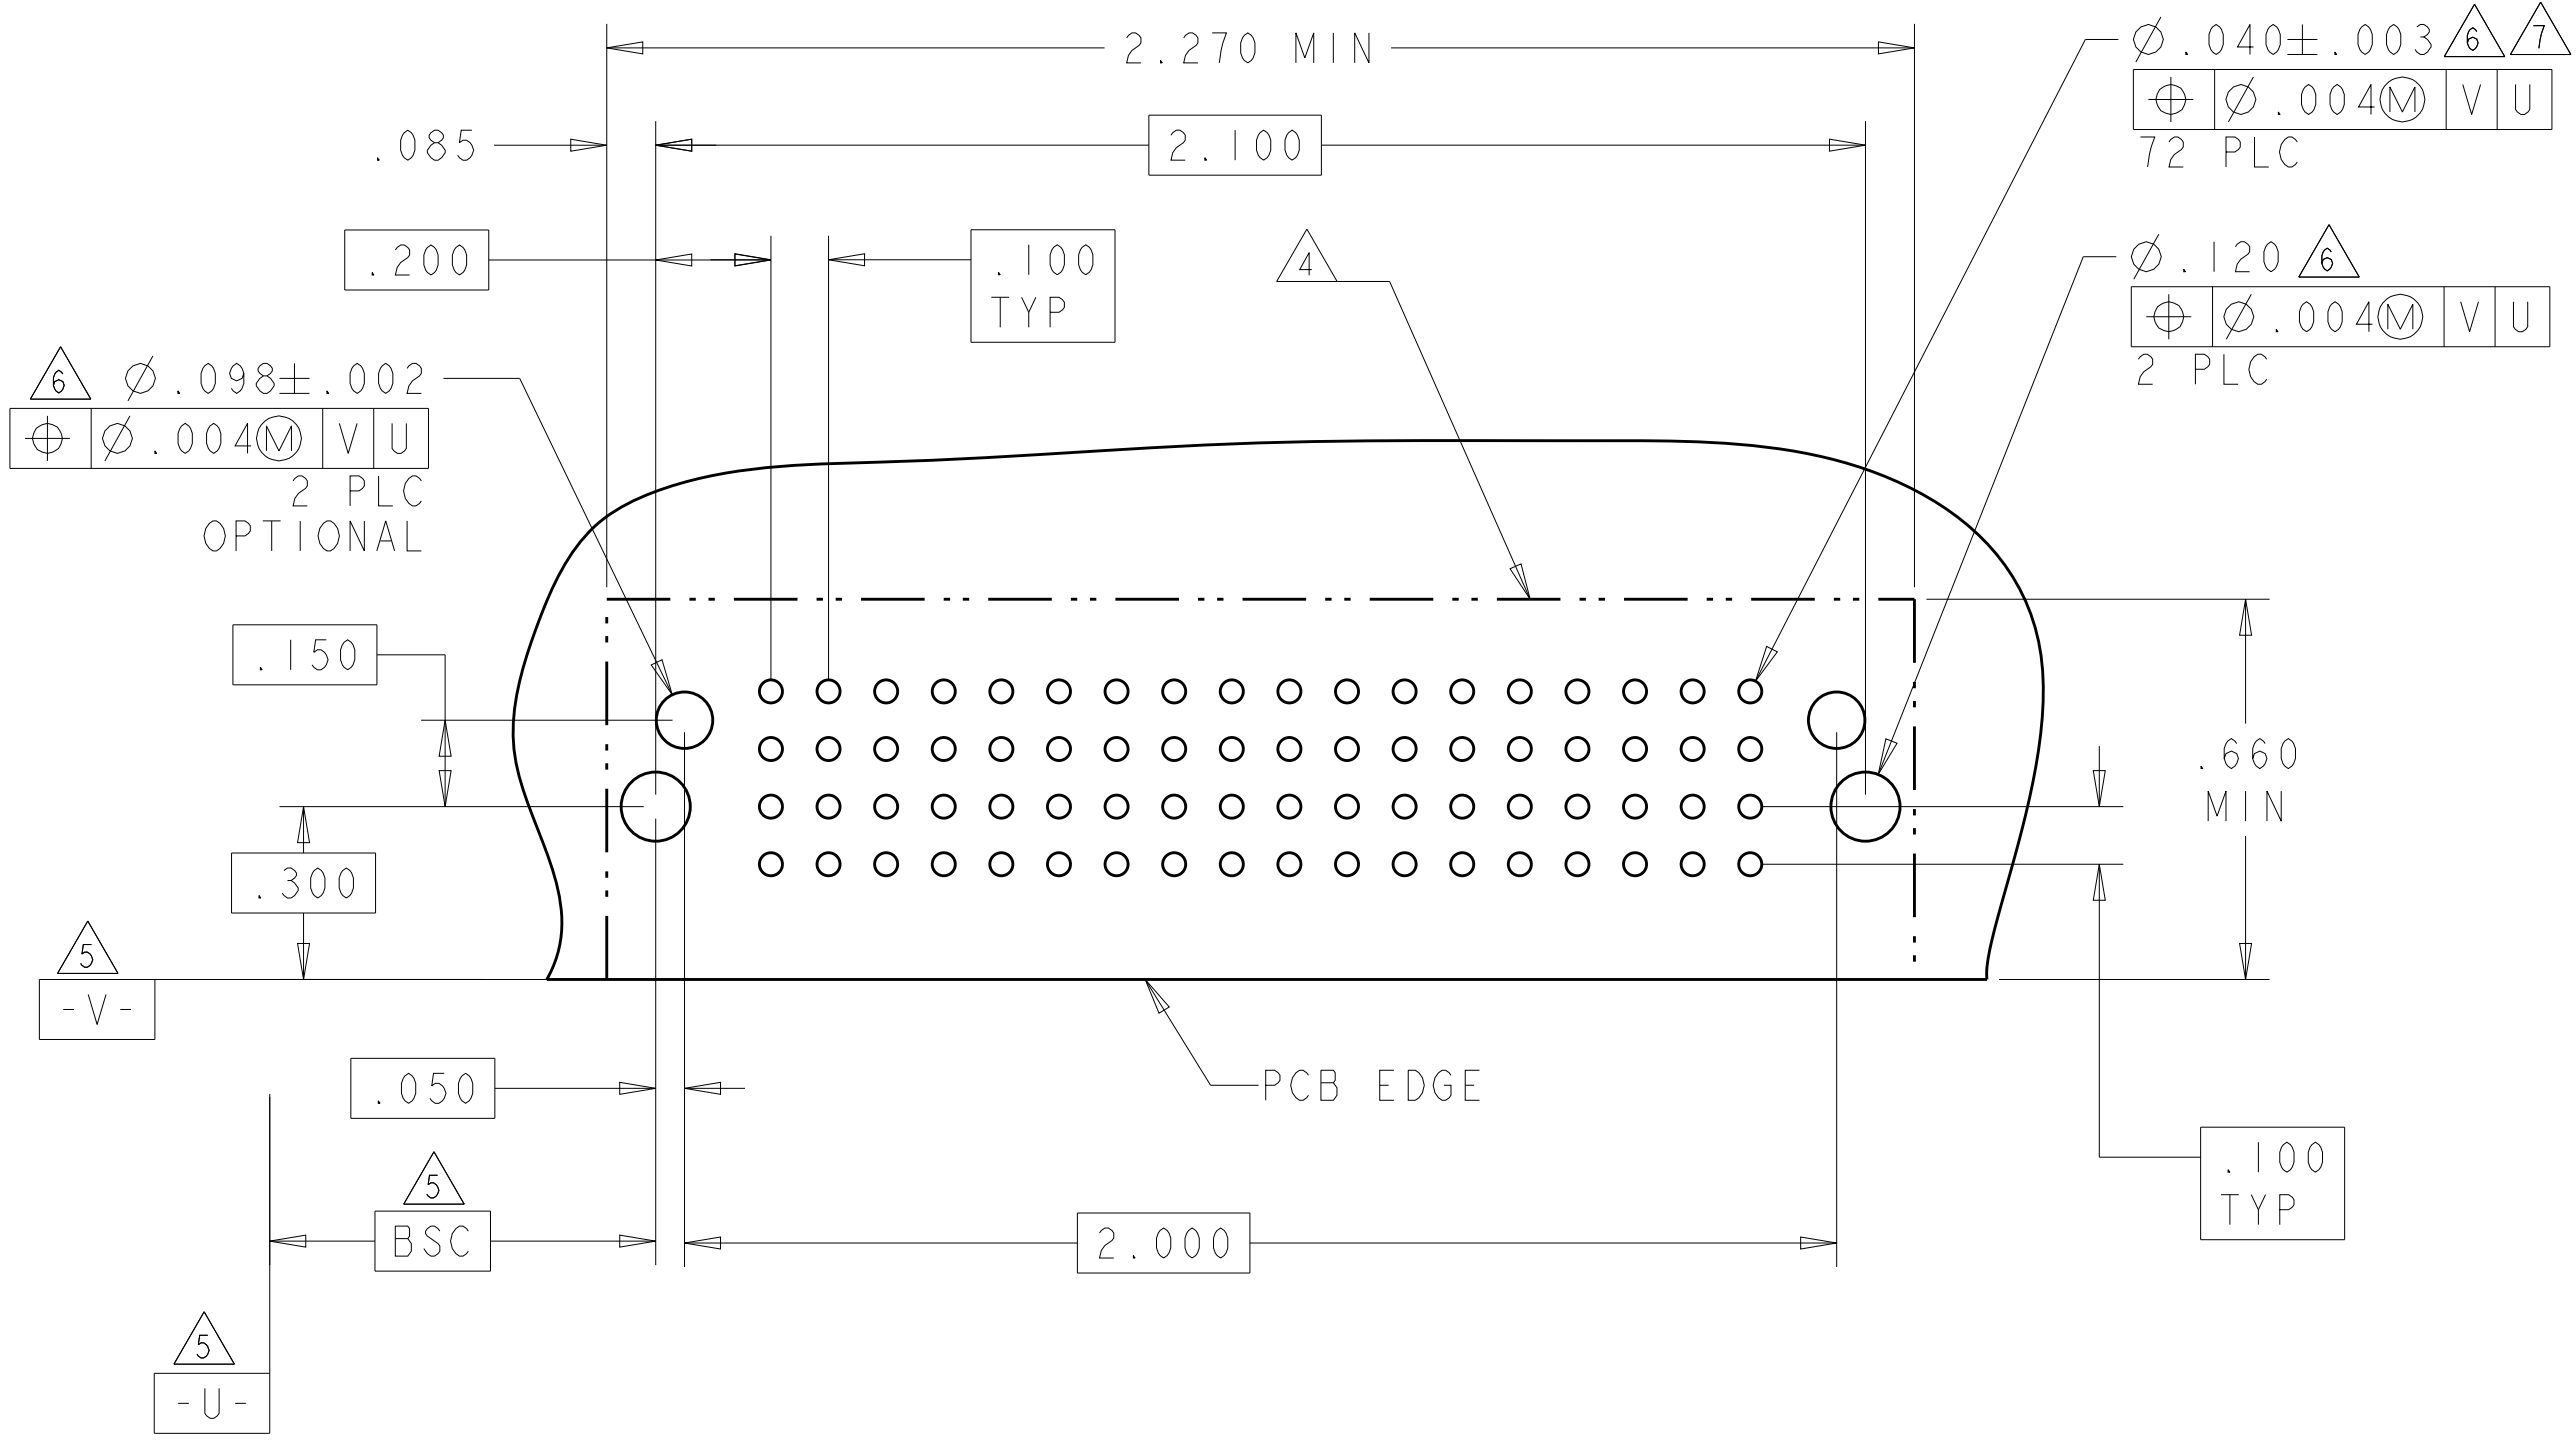

ASSY PART NUMBER	ROWS		SIGNAL						POWER						
			I	2	3	4	5	6	P1	P2	P3	P4	P5	P6	
6450831-9	D C B A		J	J	J	J	J	J							
			K	K	K	K	K	K							
			N	N	N	N	N	N							
			S	S	S	S	S	S							
24S + 6P															


4805 (3/11)

PART NUMBER	ROWS		SIGNAL								POWER											
			1	2	3	4	5	6	7	8	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10		
1-6450831-2	D		J	J	J	J	J	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM		
	C		K	K	K	K	K	K	K	K												
	B		N	N	N	N	N	N	N	N												N
	A		H	H	H	H	H	H	H	H												H
32S + 10P																						

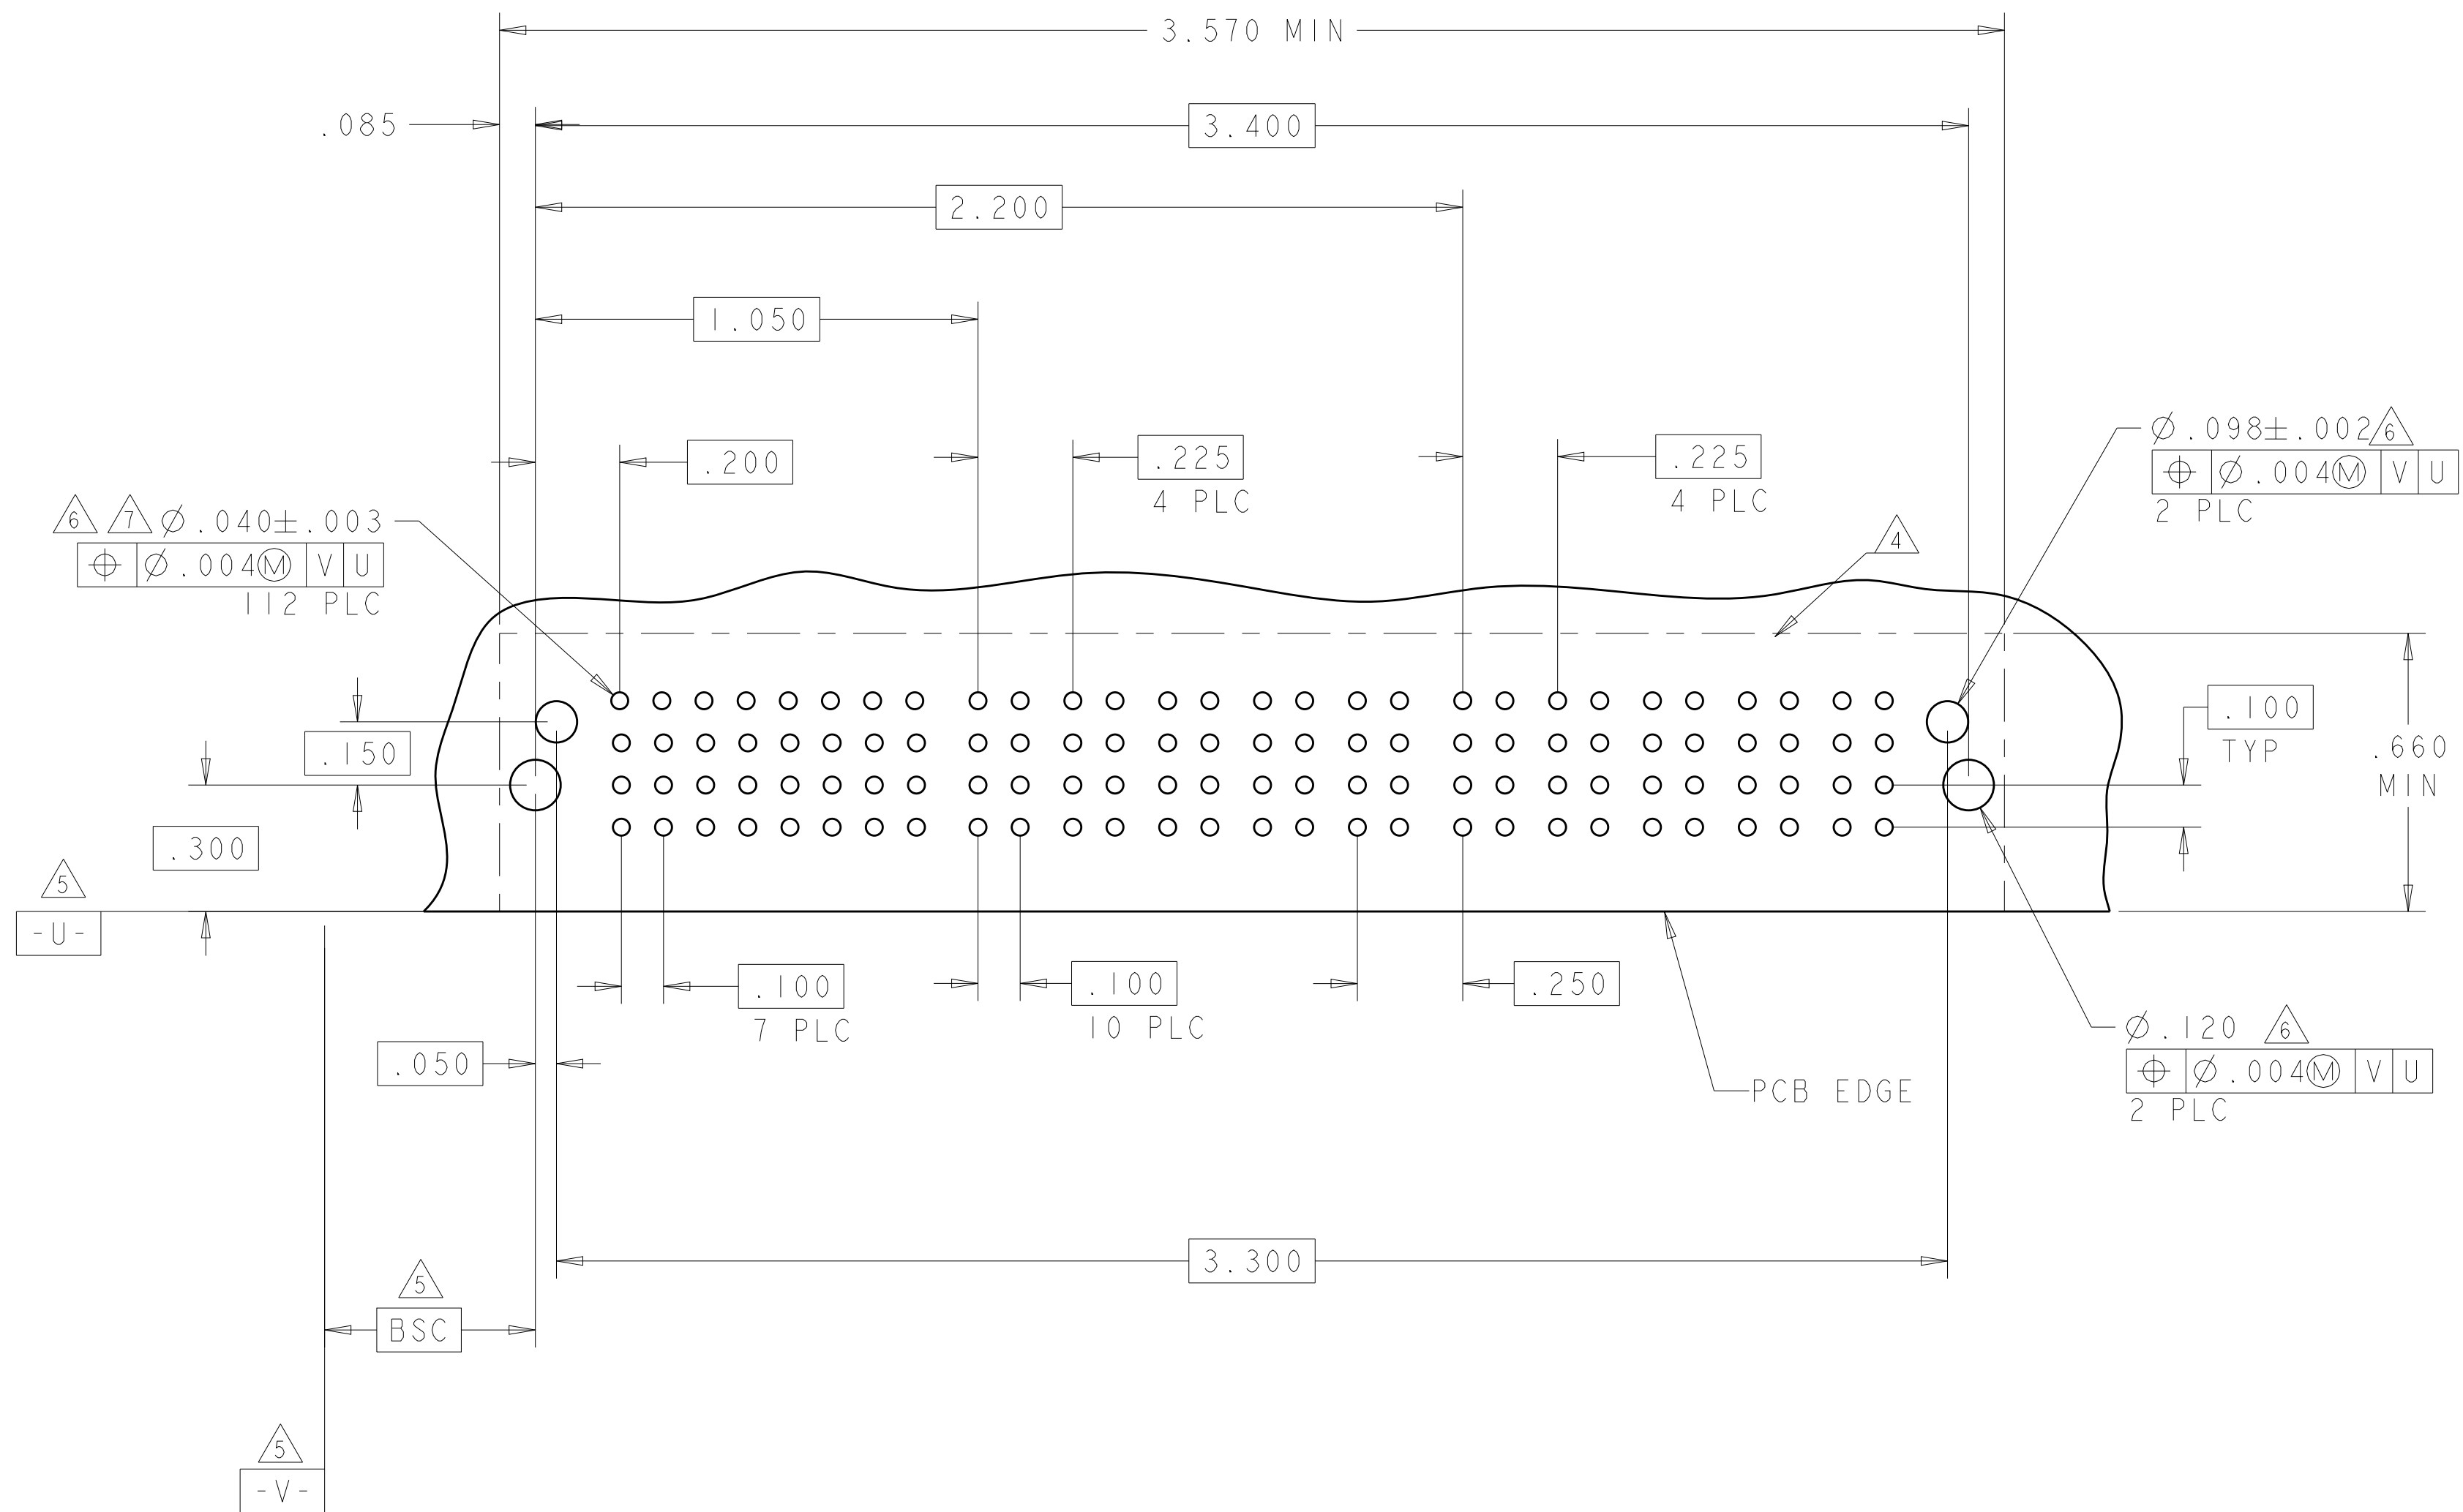4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		SIGNAL								POWER										
			1	2	3	4	5	6	7	8	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	
1-6450831-3	D		J	J	J	J	J	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM		
	K		K	K	K	K	K	K	K	K											
	N		N	N	N	N	N	N	N	N											N
	A	HD	H	H	H	H	H	H	H	H											HD
32S + 10P																					

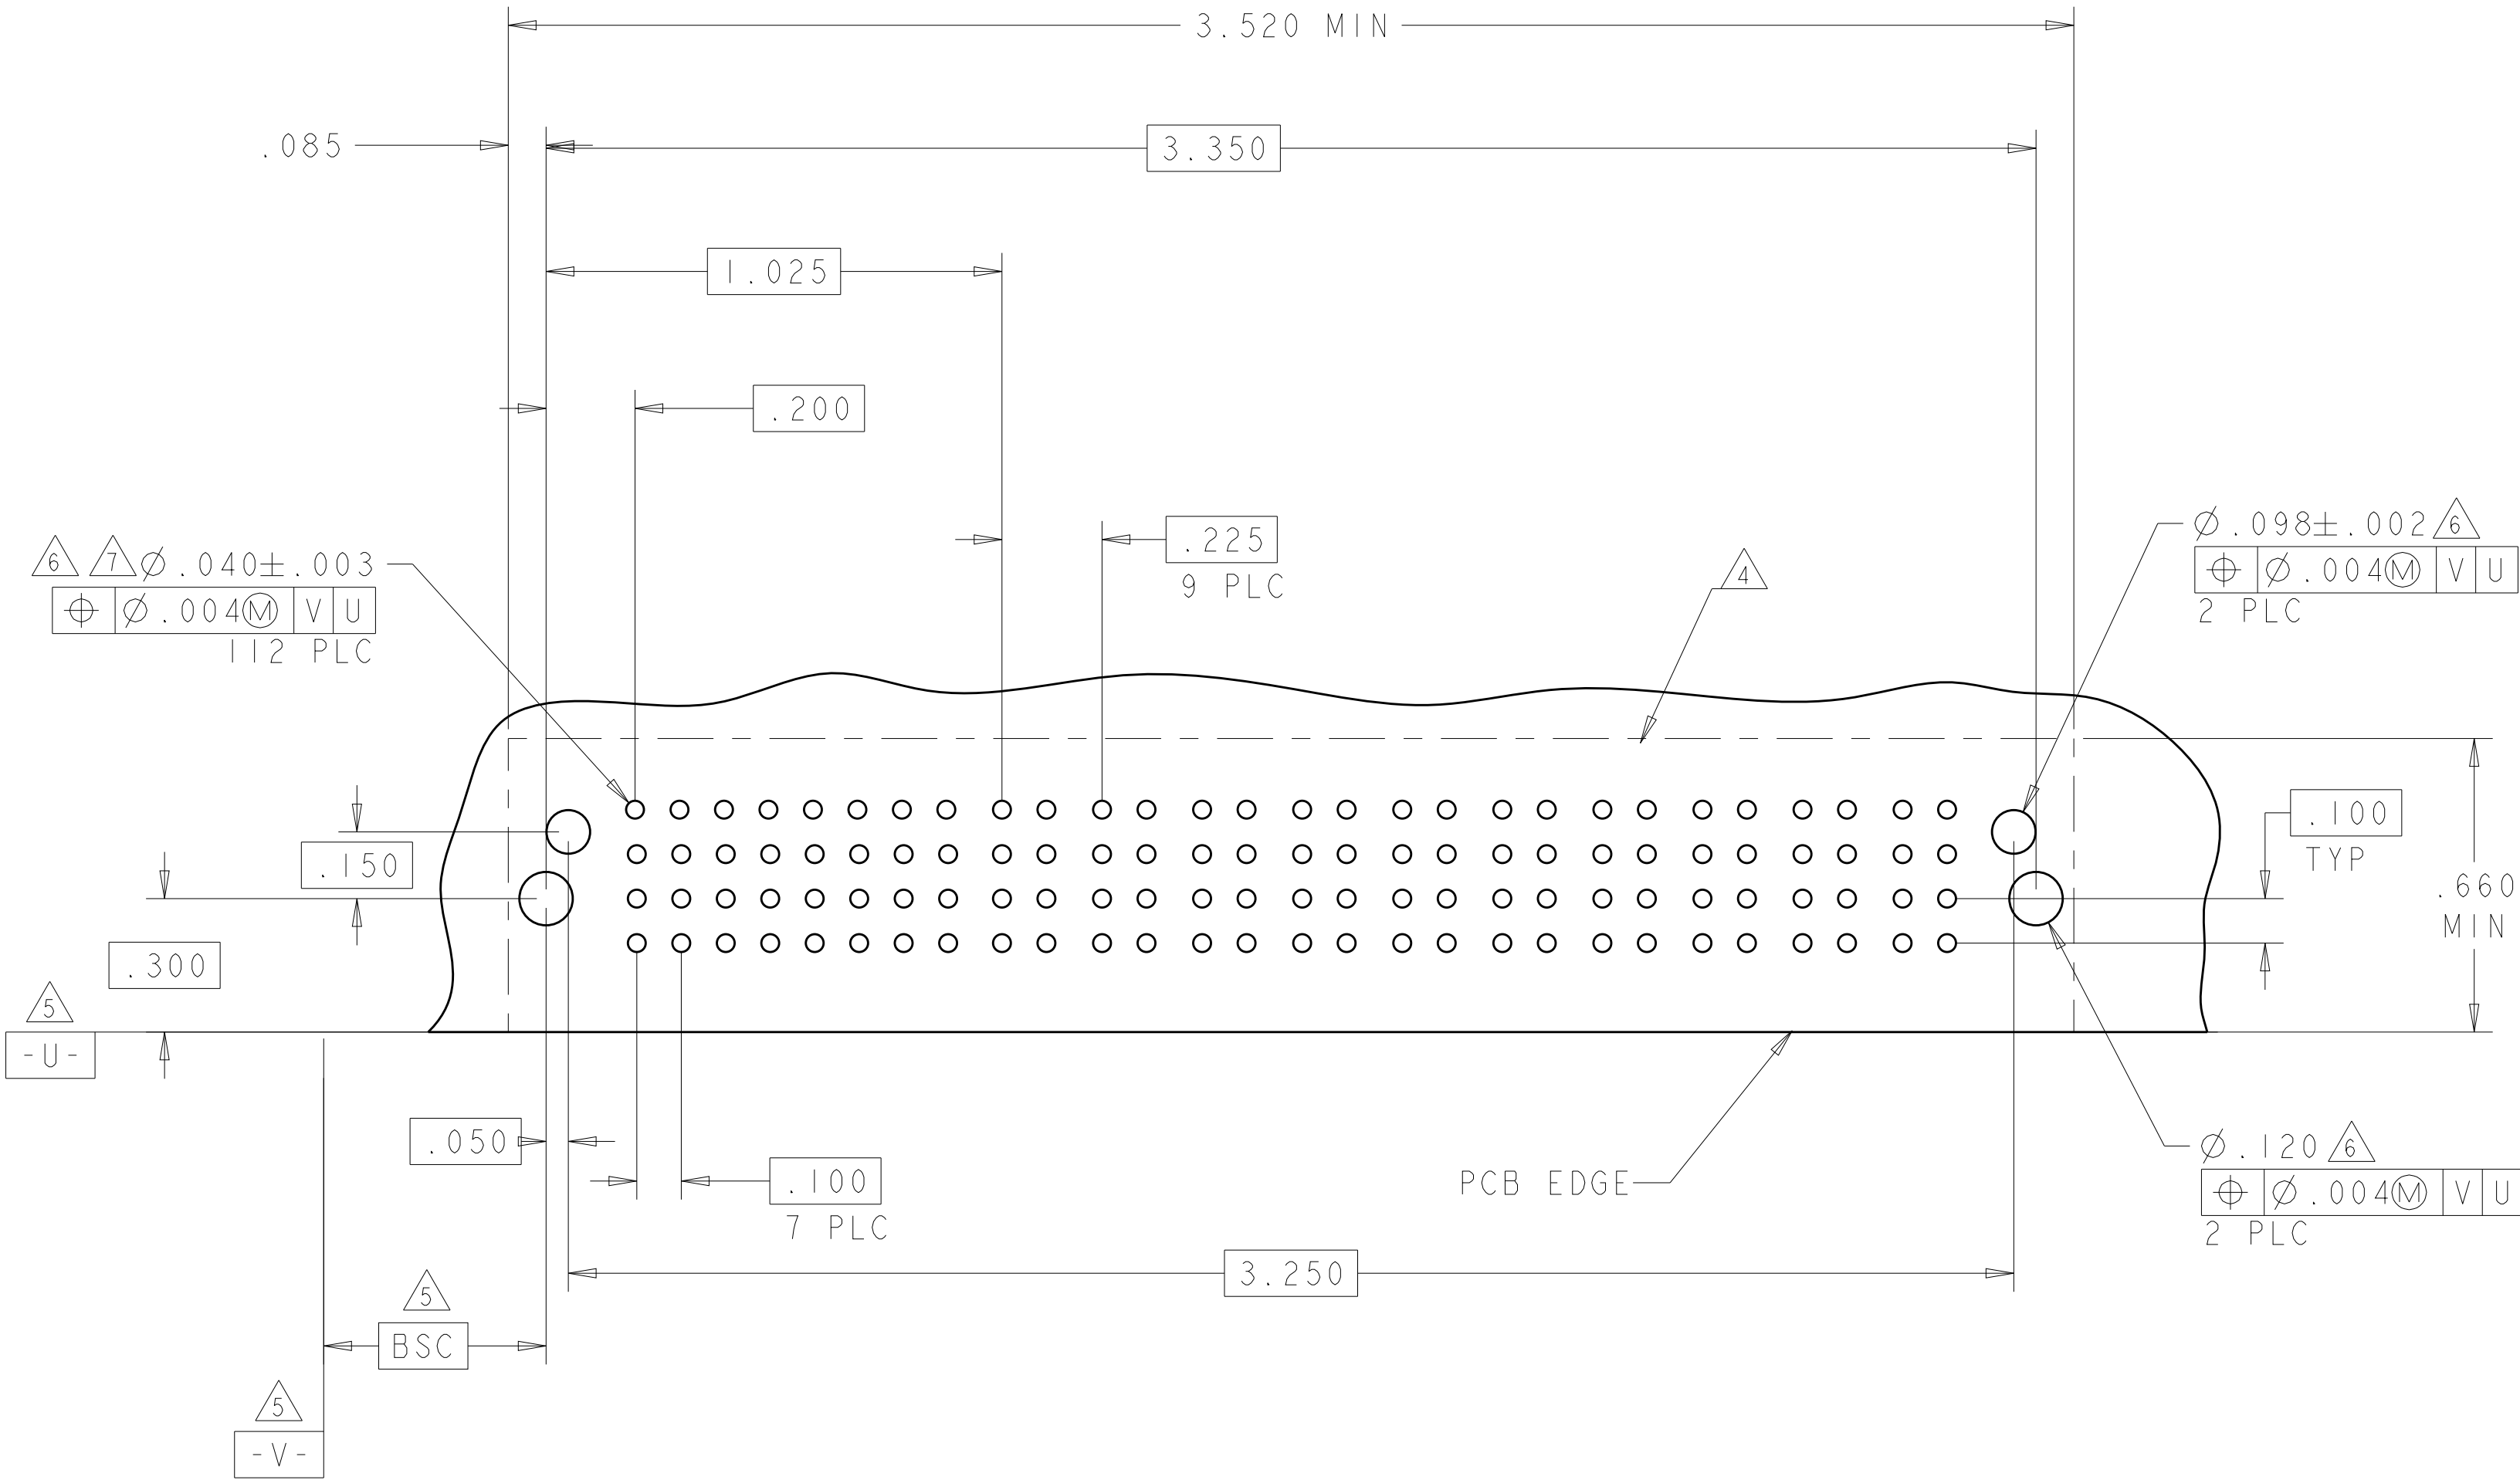

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.ZHOU	15OCT2007	 TE Connectivity							
		CHK S.ZHAO	15OCT2007								
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE						
				APVD S.YAO							
		PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
		108-2292									
		APPLICATION SPEC									
		108-13038		A1	00779	C=6450831	-				
		WEIGHT									
MATERIAL		FINISH									
-		-		Customer Drawing							
				SCALE	4:1	SHEET	7	OF	17	REV	L7

H3

4805 (3/11)



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		SIGNAL				
			1	2	3	4	
1-6450831-5	D	HD	E	E	E	E	HD
	C		F	F	F	F	
	B		G	G	G	G	
	A		H	H	H	S	
16S							

PART NUMBER	ROWS		SIGNAL				
			1	2	3	4	
3-6450831-6	D	HD	E	E	J	J	HD
	C		K	K	K	K	
	B		N	N	N	N	
	A		S	S	S	S	
16S							

H7

PART NUMBER	ROWS		SIGNAL				POWER										
			1	2	3	4	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	
1-6450831-6	D	HD	E	E	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	HD
	C		K	K	K	K											
	B		N	N	N	N											
	A		S	S	S	S											
16S + 10P																	

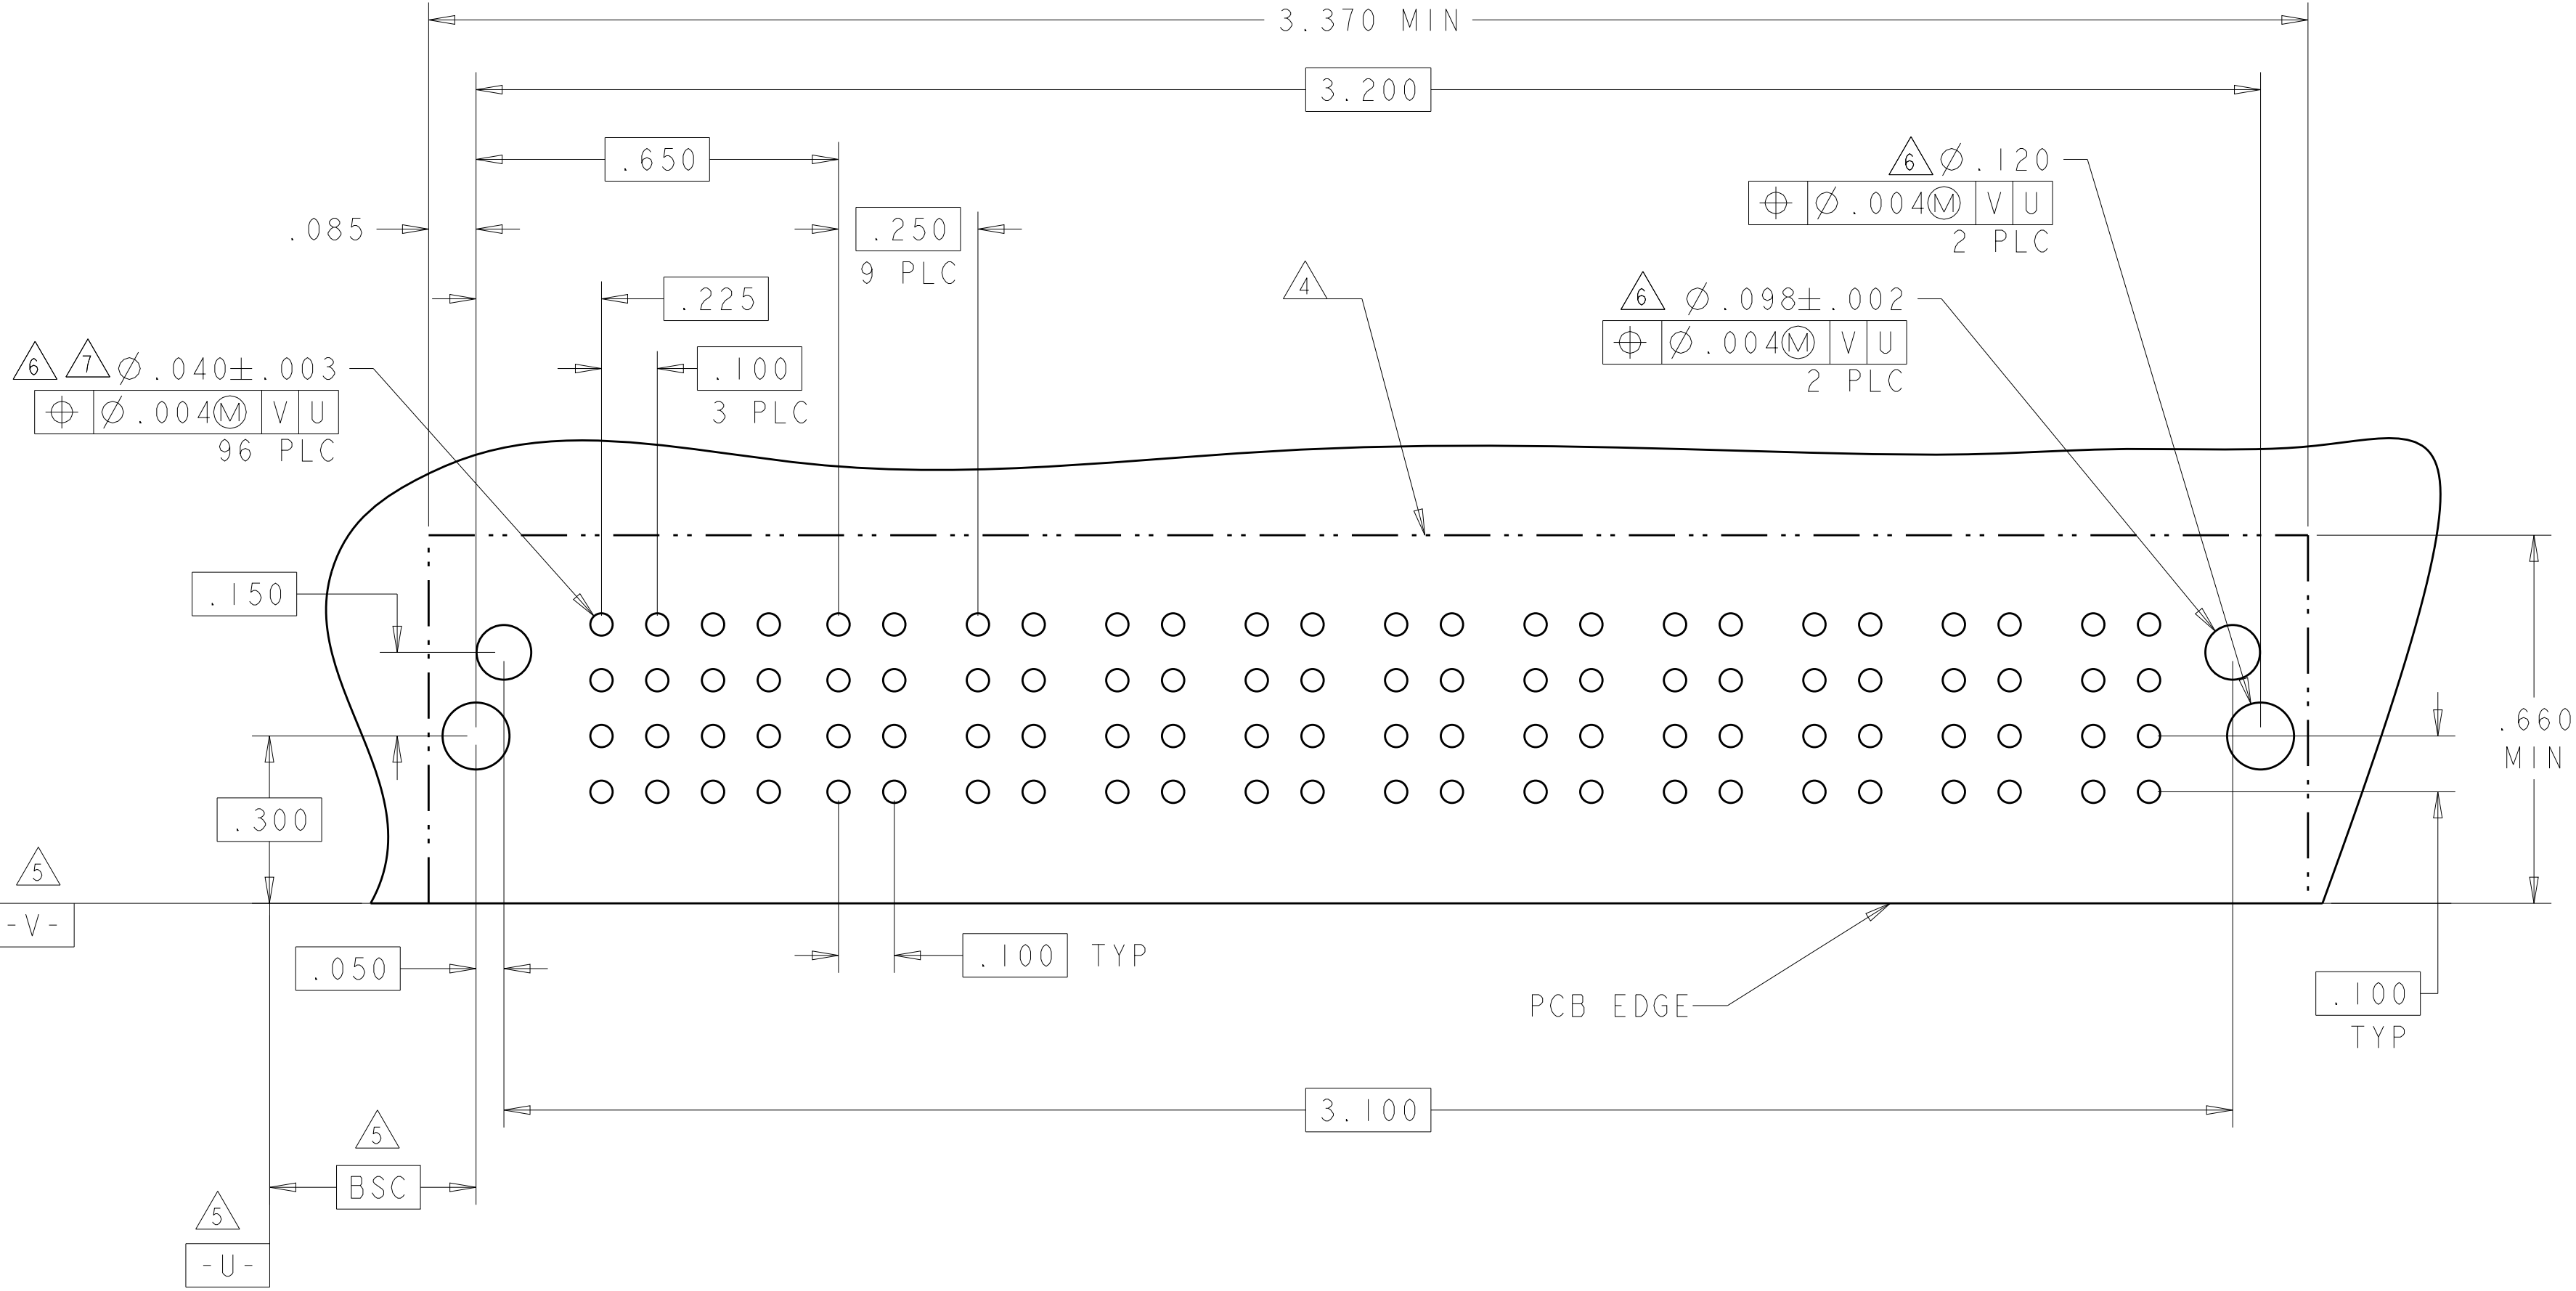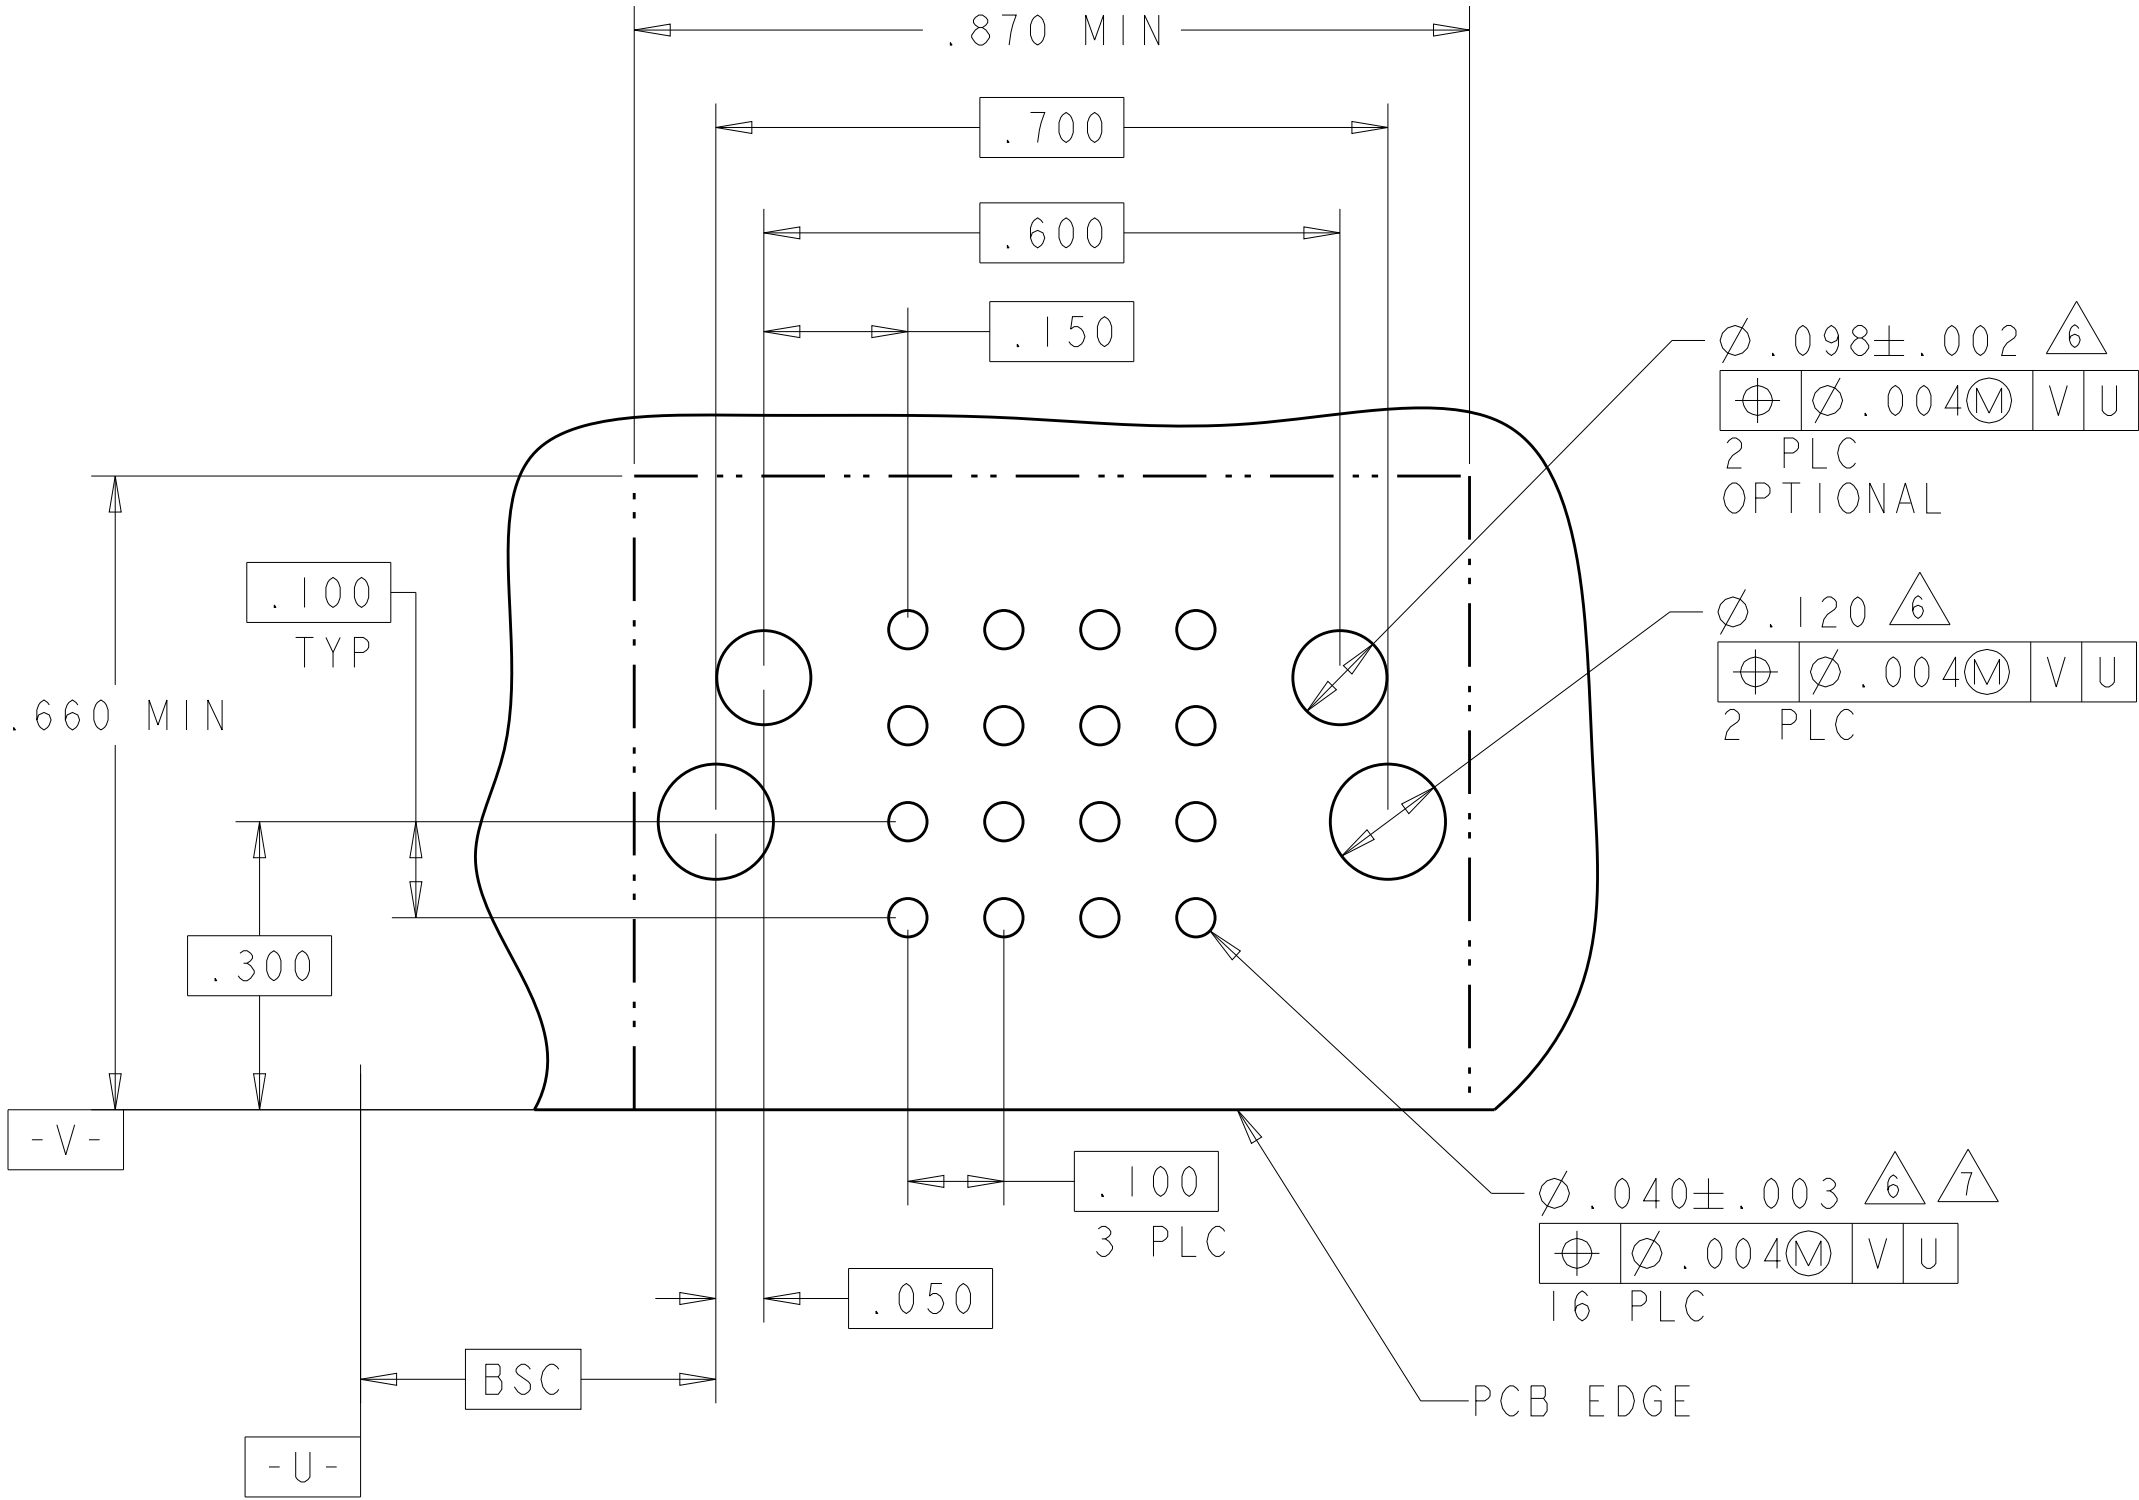

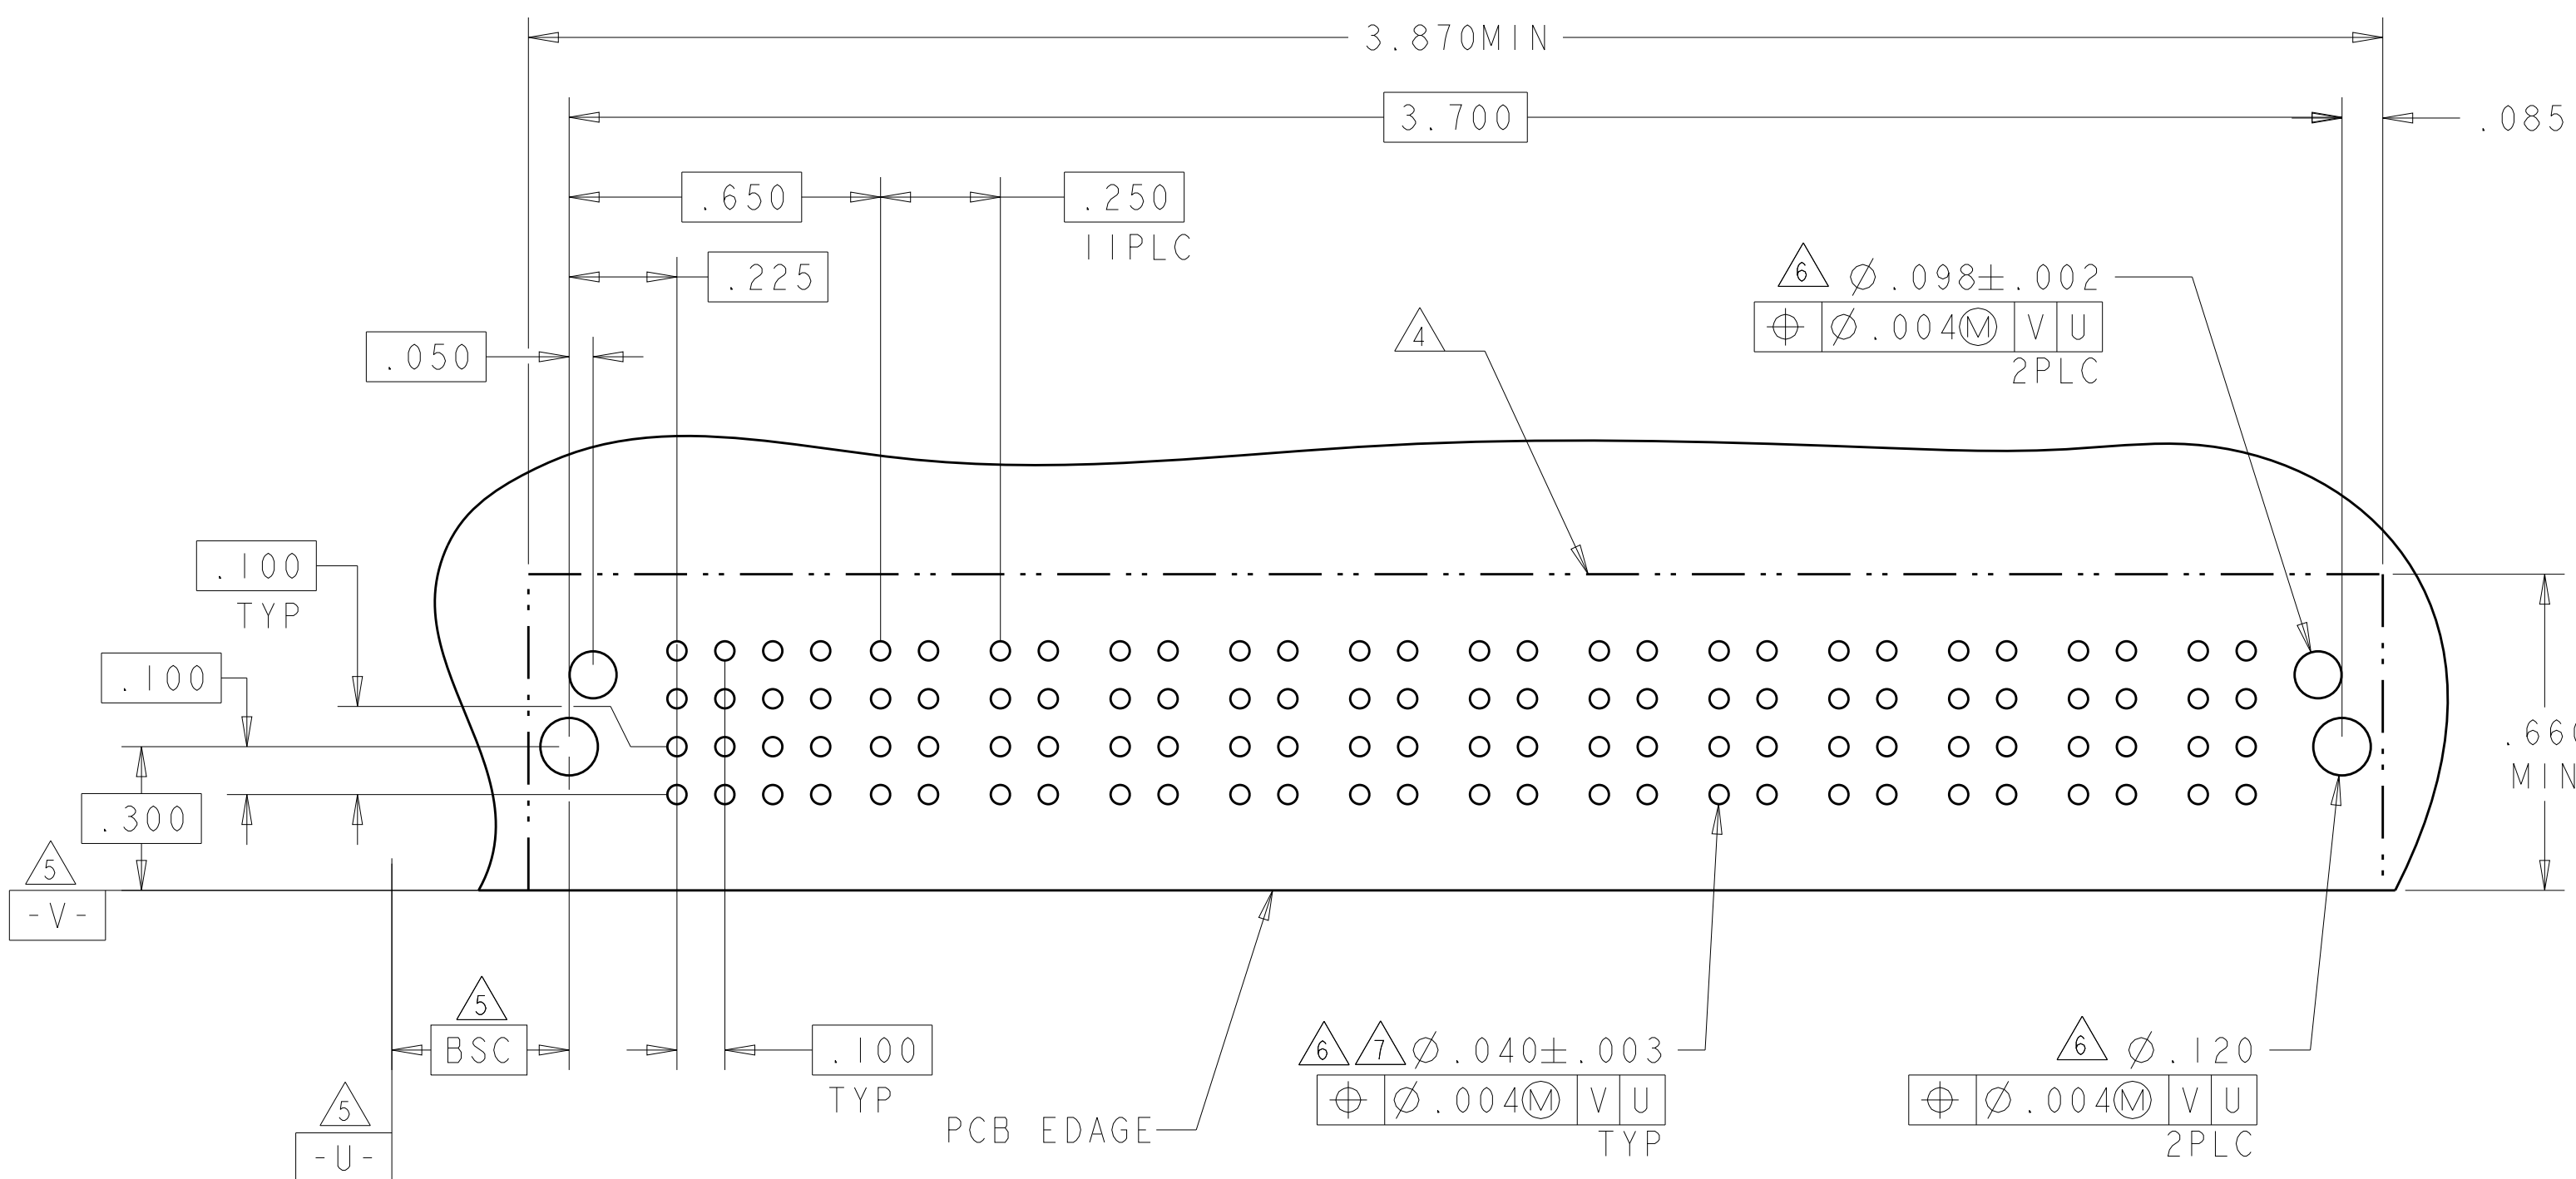[illegible]

RECOMMENDED PCB LAYOUT

4805 (3/11)


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		SIGNAL						POWER				
			1	2	3	4	5	6	P1	P2	P3	P4	
1-6450831-9	D		J	J	J	J	J	J	TM	TM	TM	TM	
	C		K	K	K	K	K	K					
	B		N	N	N	N	N	N					
	A	HD	S	S	S	S	S	S					
24S + 4P													

PART NUMBER	ROWS		SIGNAL						
			1	2	3	4	5	6	
2-6450831-0	D		J	J	J	J	J	J	
	C		K	K	K	K	K	K	
	B		N	N	N	N	N	N	
	A	HD	S	S	S	S	S	HD	
24S									

PART NUMBER	ROWS		SIGNAL						
			1	2	3	4	5	6	
2-6450831-1	D		J	J	J	E	E	E	
	C		K	K	K	K	F	F	
	B		N	N	N	N	G	G	
	A	HD	S	S	S	S	H	H	
24S									


J4

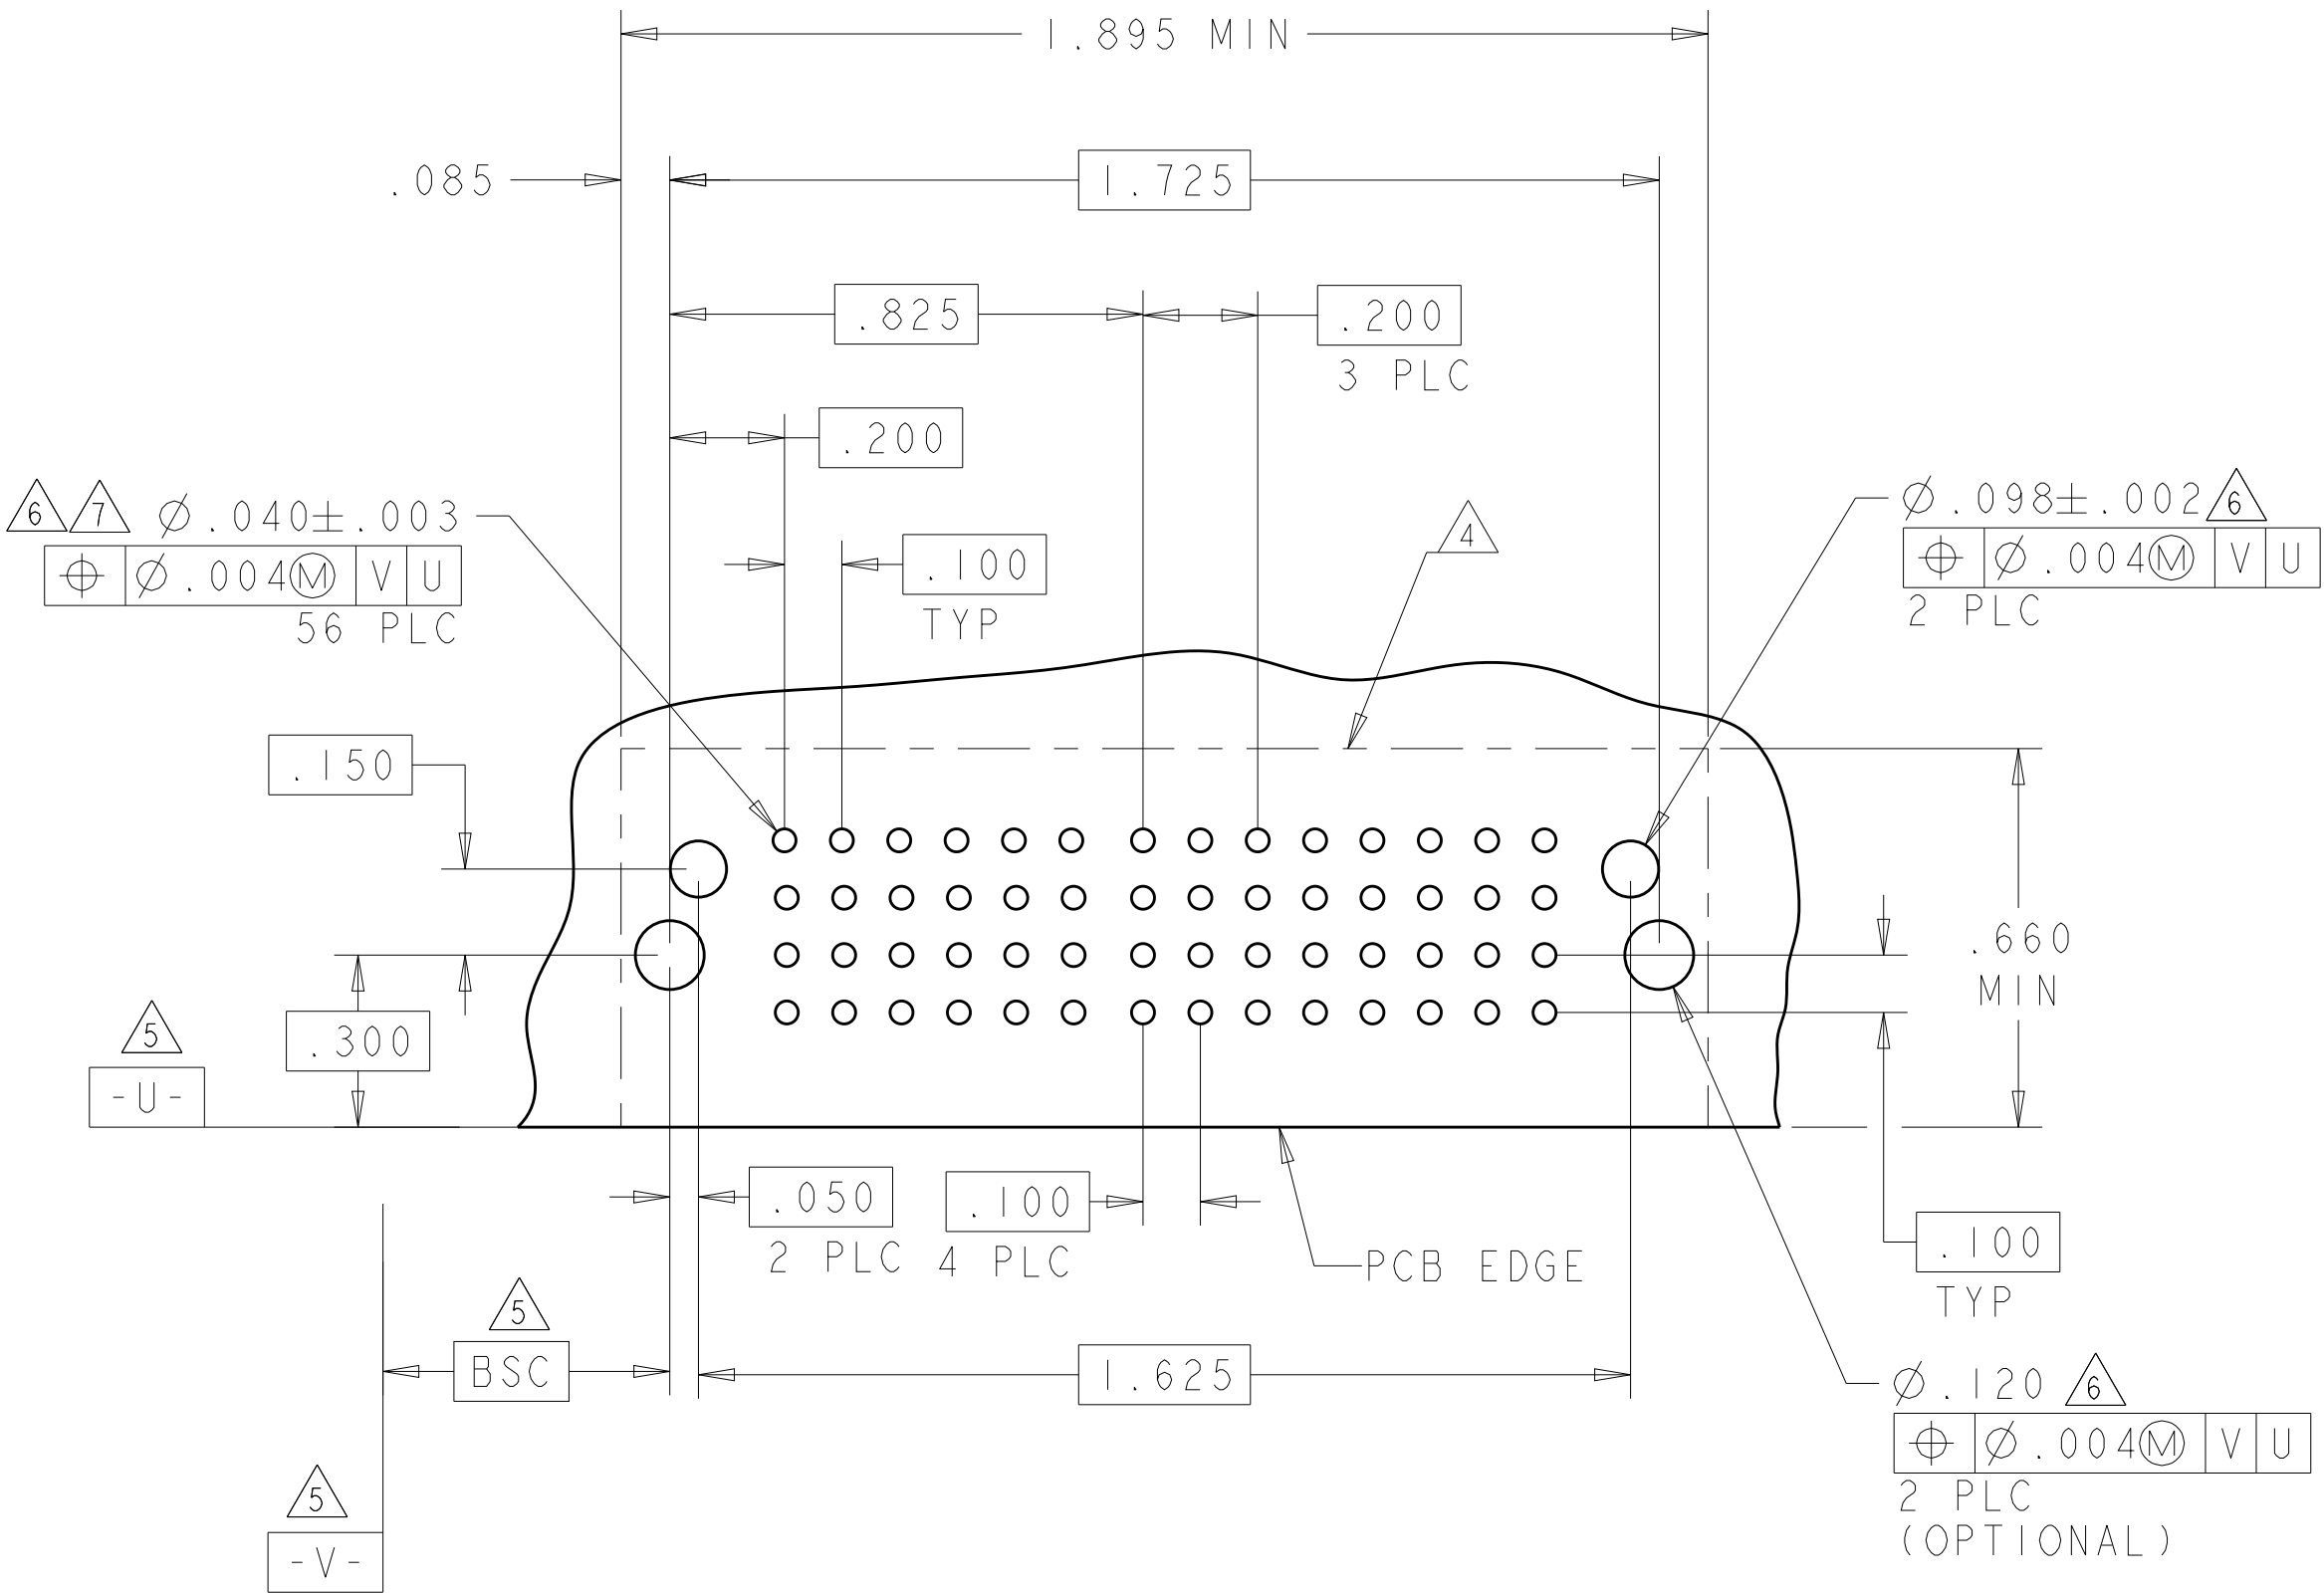

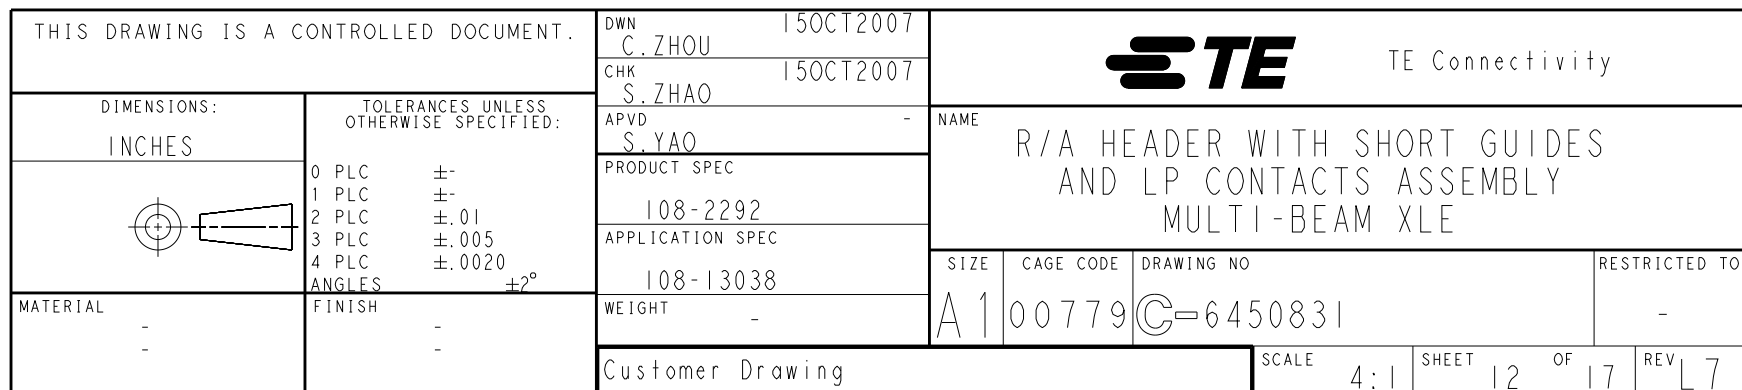



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		SIGNAL						POWER												
			1	2	3	4	5	6	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	
2-6450831-3	D		J	J	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM		
	C		F	K	K	K	K														K
	B		N	G	G	N	N														N
	A	HD	H	S	S	S	H														S
24S + 12HDP																					



PART NUMBER	ROWS		SIGNAL						POWER								
			I	2	3	4	5	6	P1	P2	P3	P4	P5	P6	P7	P8	
2-6450831-4	D		J	J	J	J	J										
	C		K	K	K	K	K										
	B		N	N	N	N	N										
	A	HD	S	S	S	S	S										HD
24S + 8P																	

NO CONTACTS LOADED

NO CONTACTS LOADED

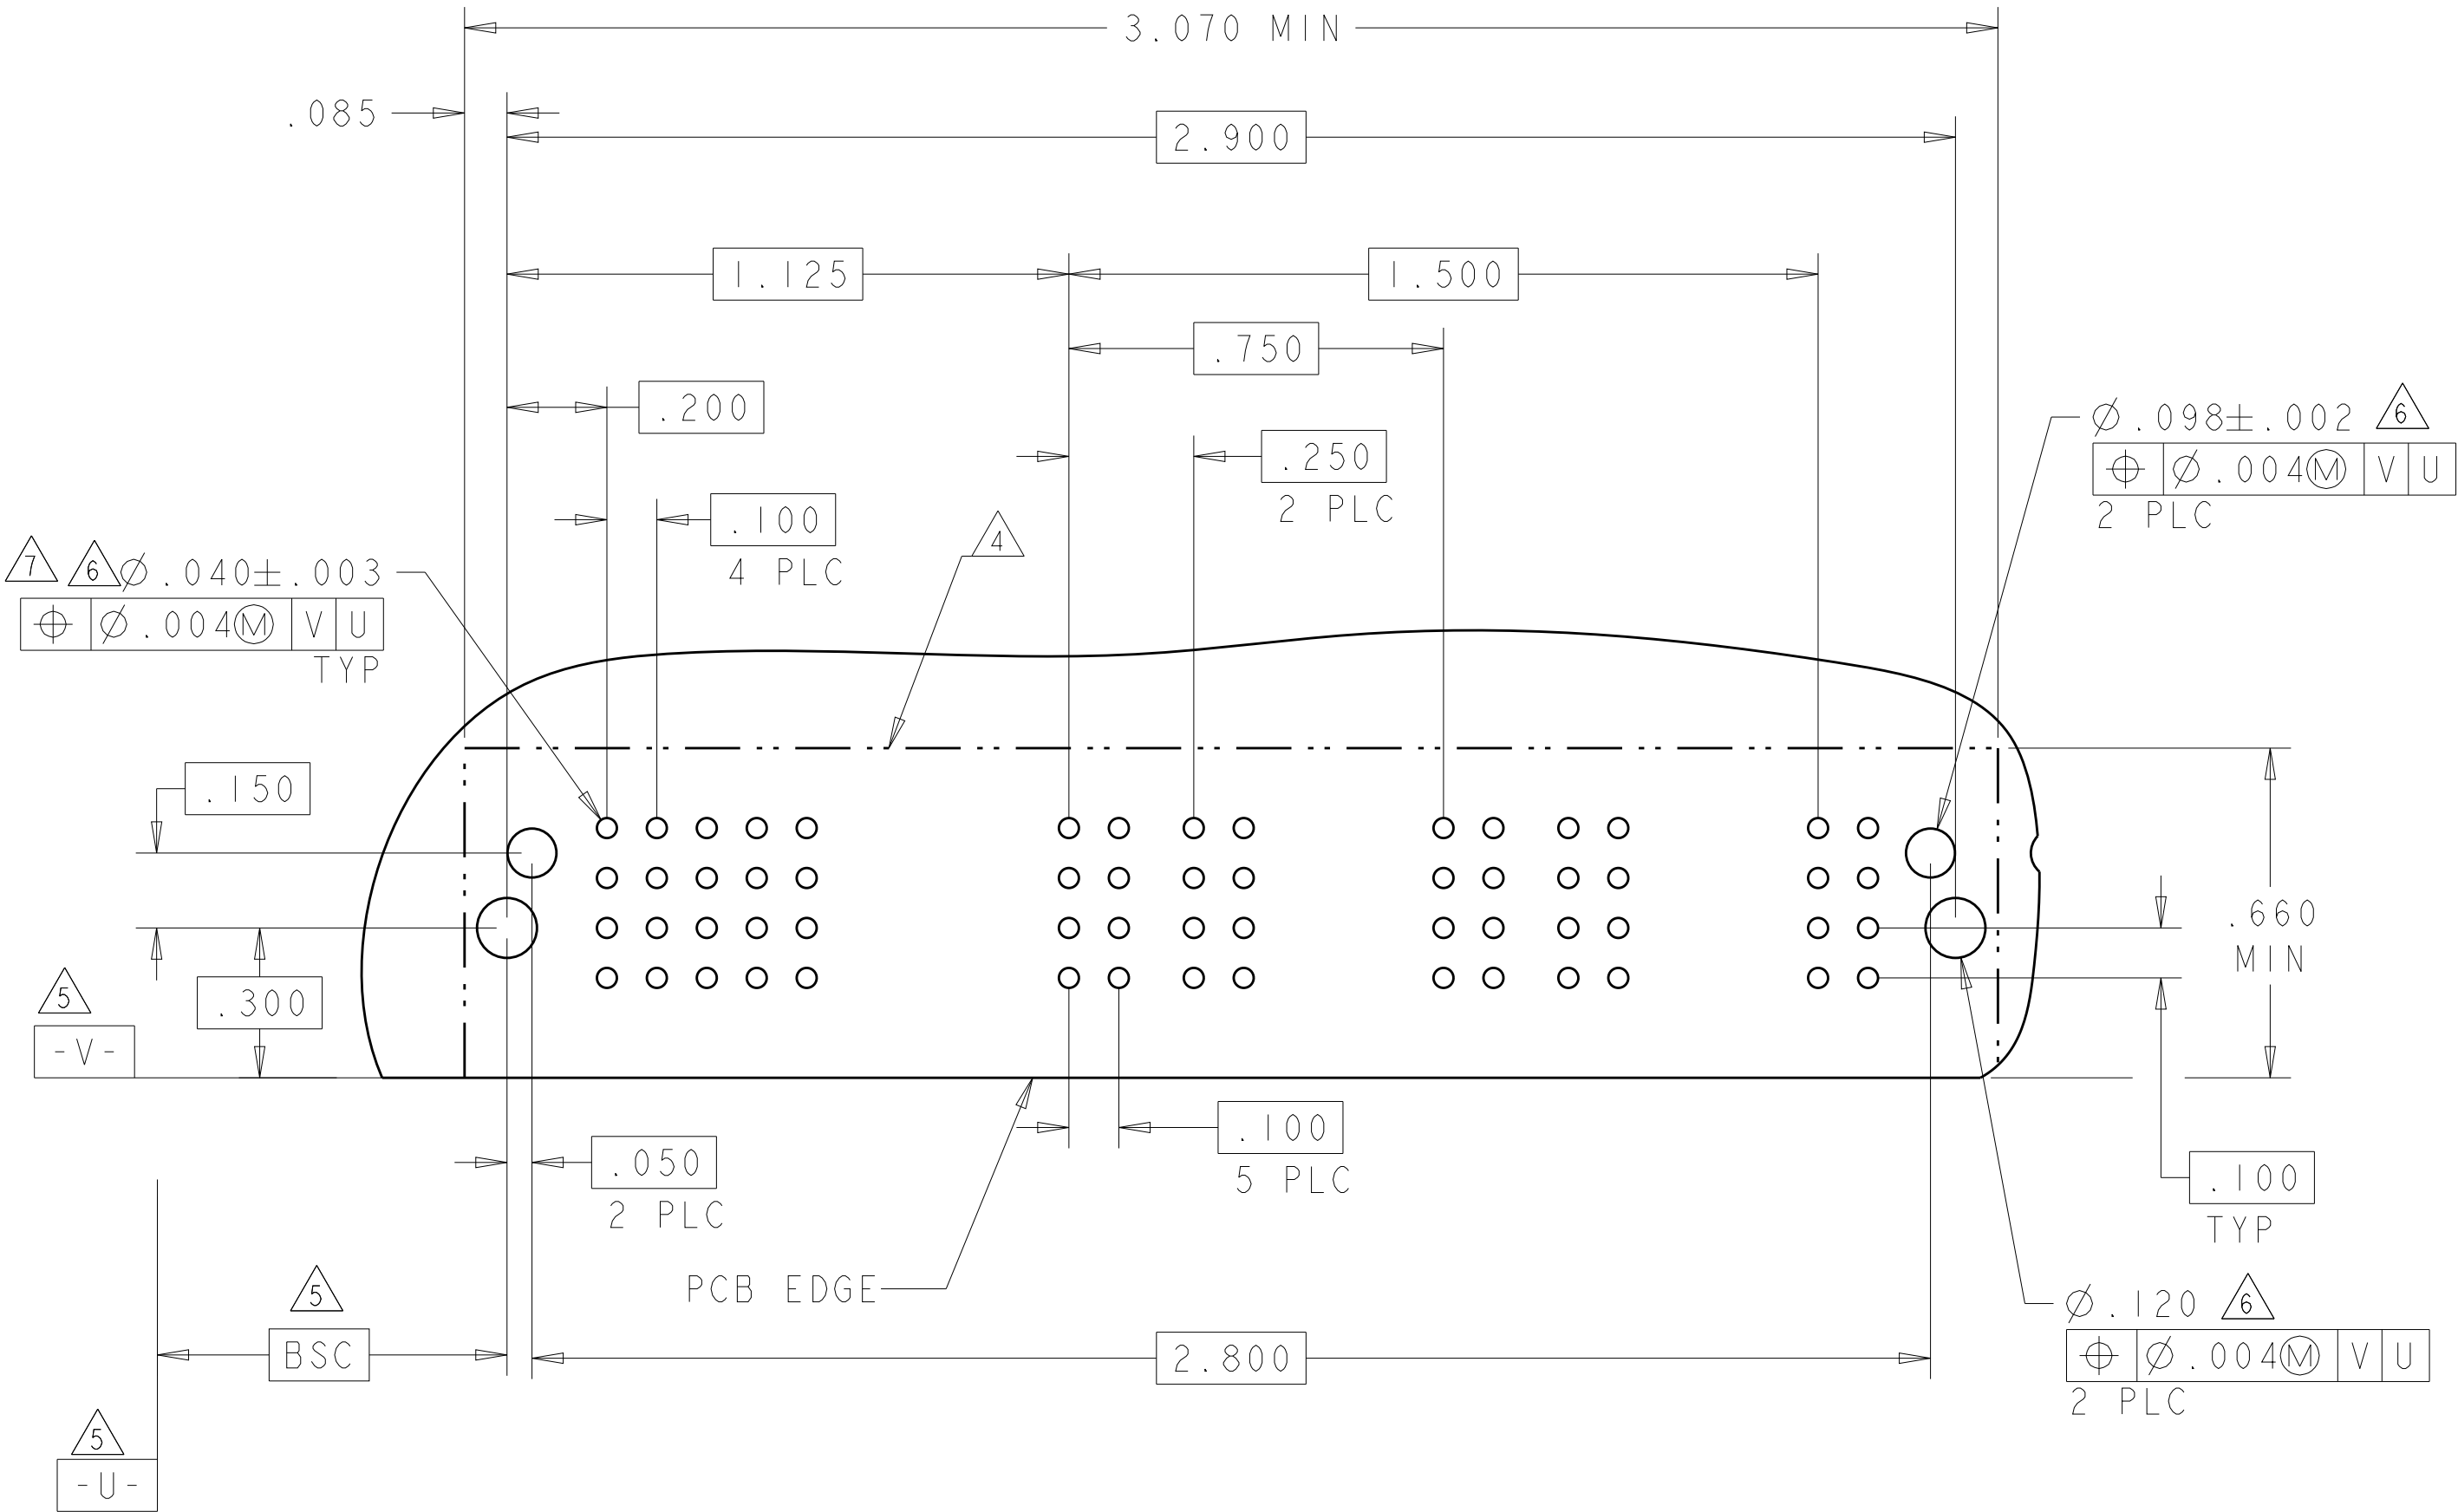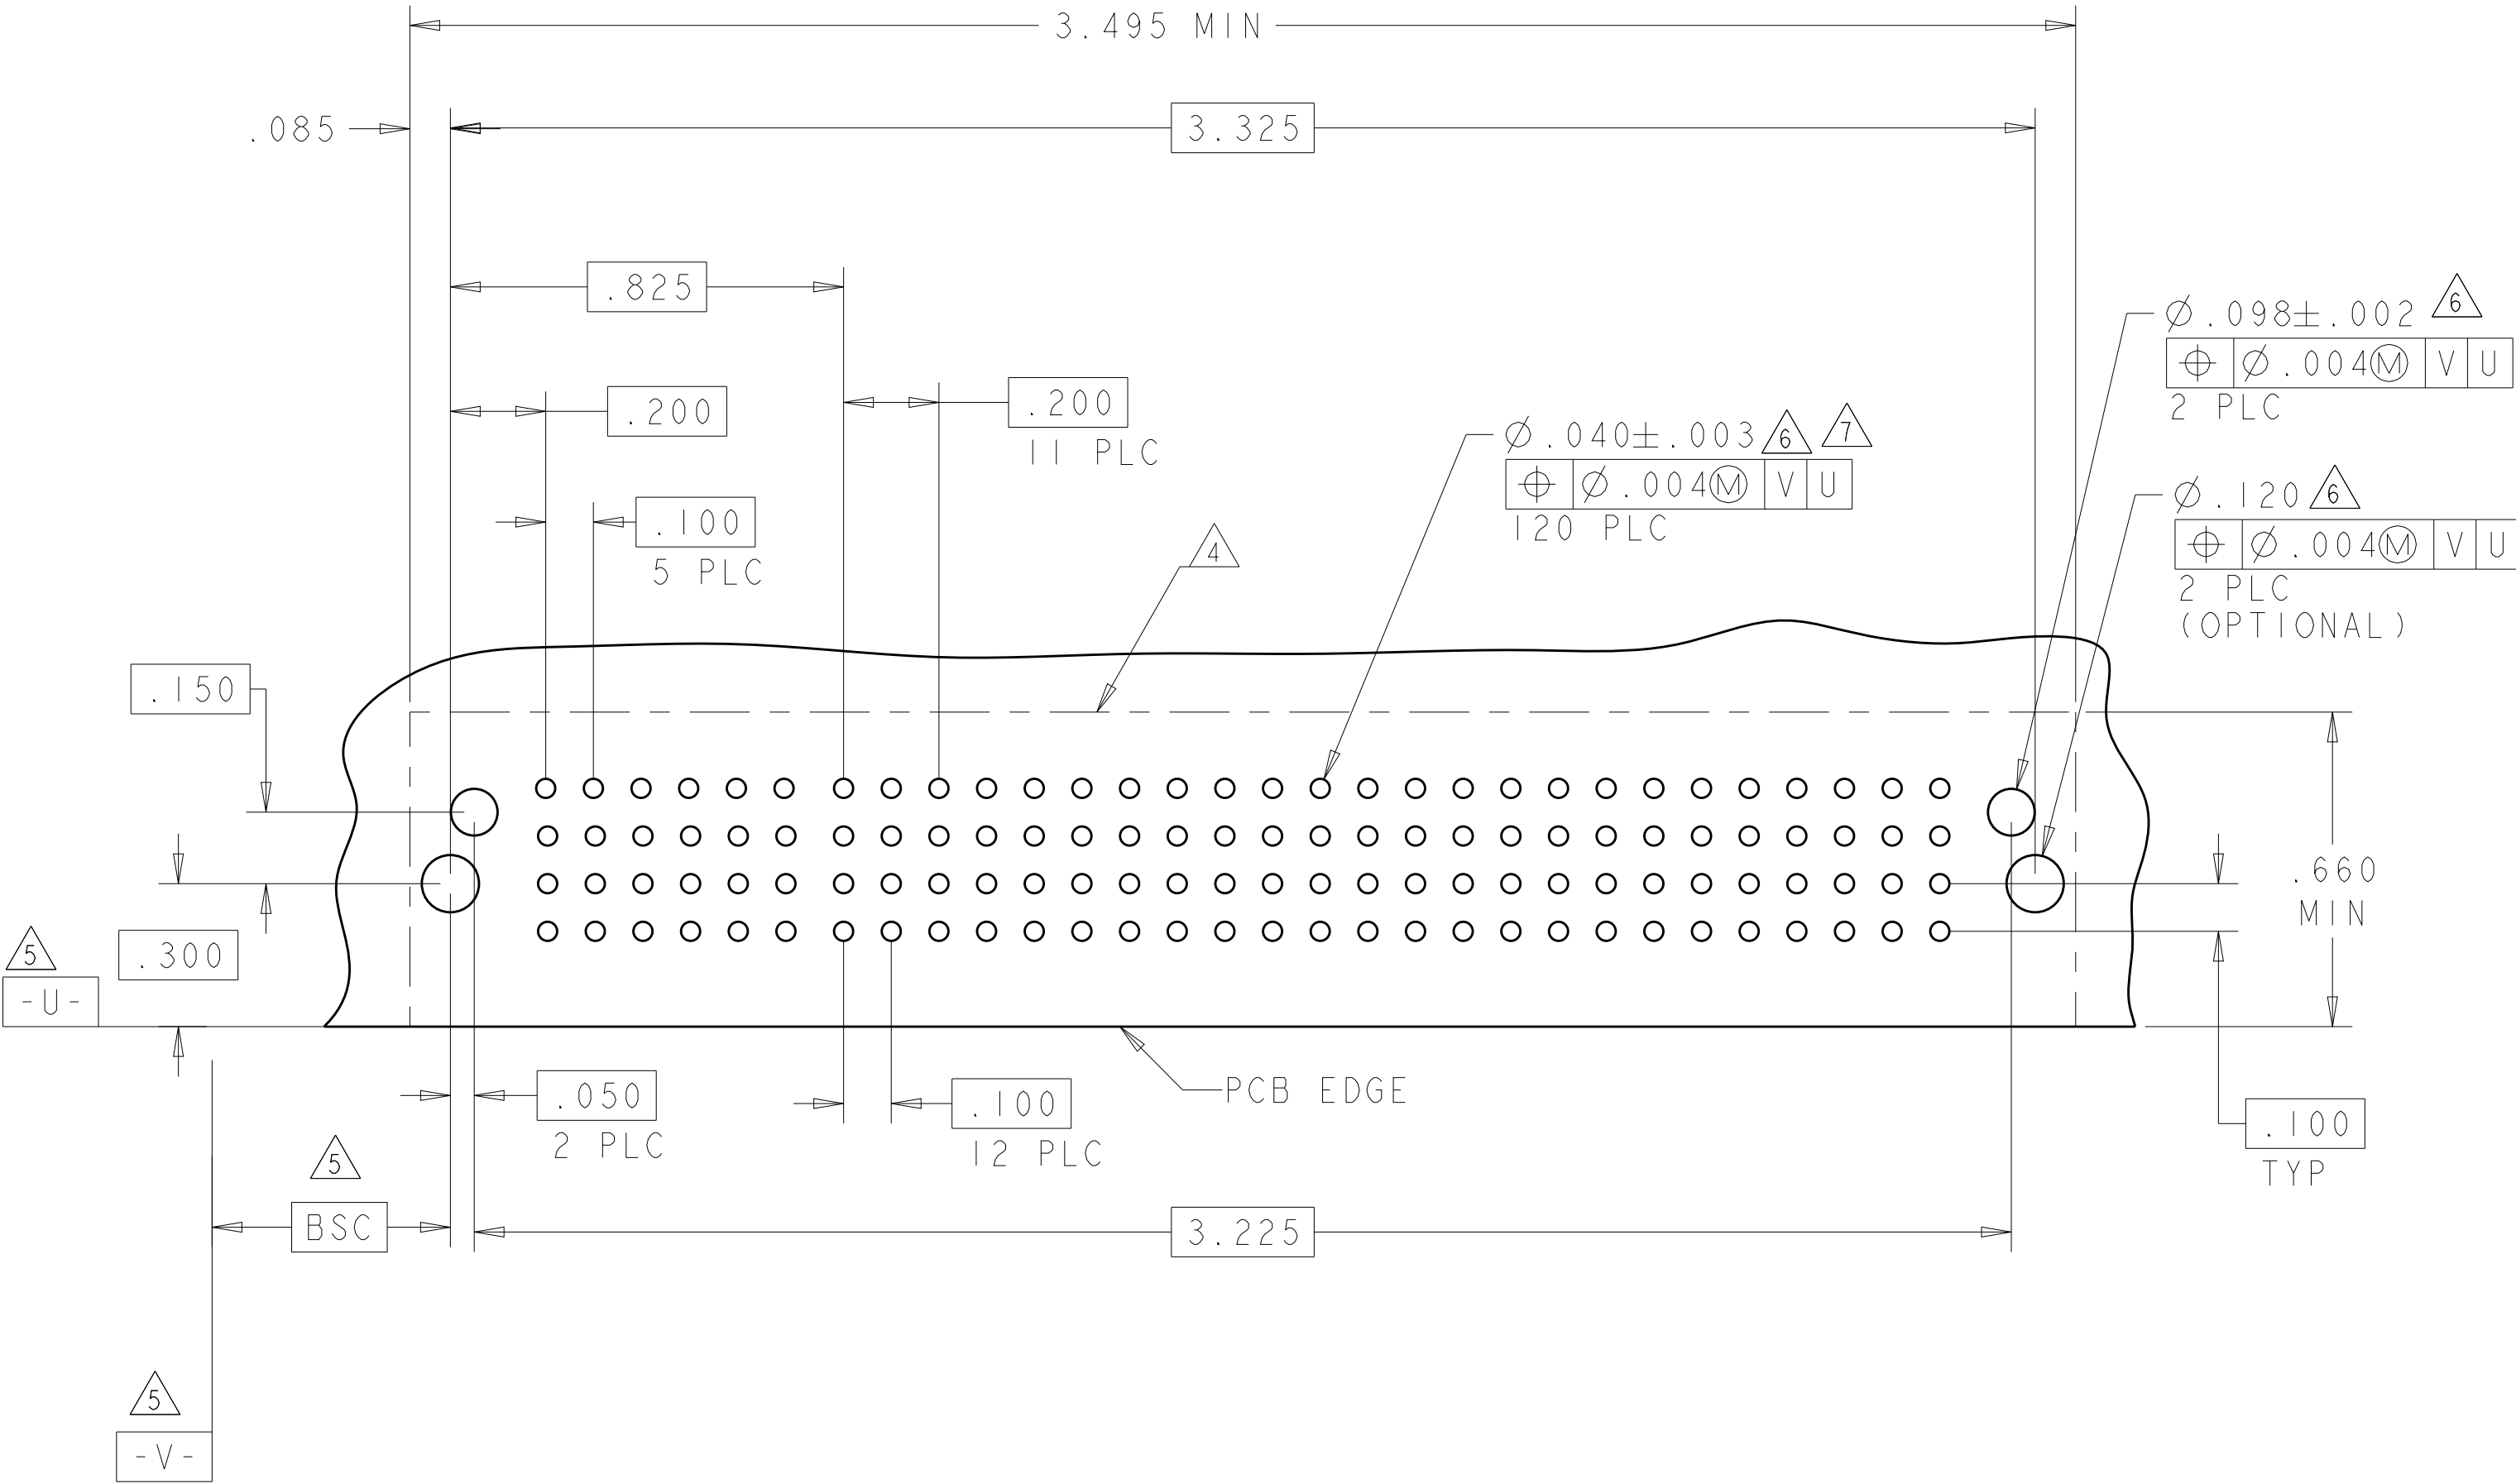

PART NUMBER	ROWS		SIGNAL				POWER					
			I	2	3	4	P1	P2		P3		P4
2-6450831-6	D		J	E	J	J	TM	TM		TM	TM	
	C		K	K	K	K						
	B		N	N	N	N						
	A		HD	S	S	S						
16S + 4P												

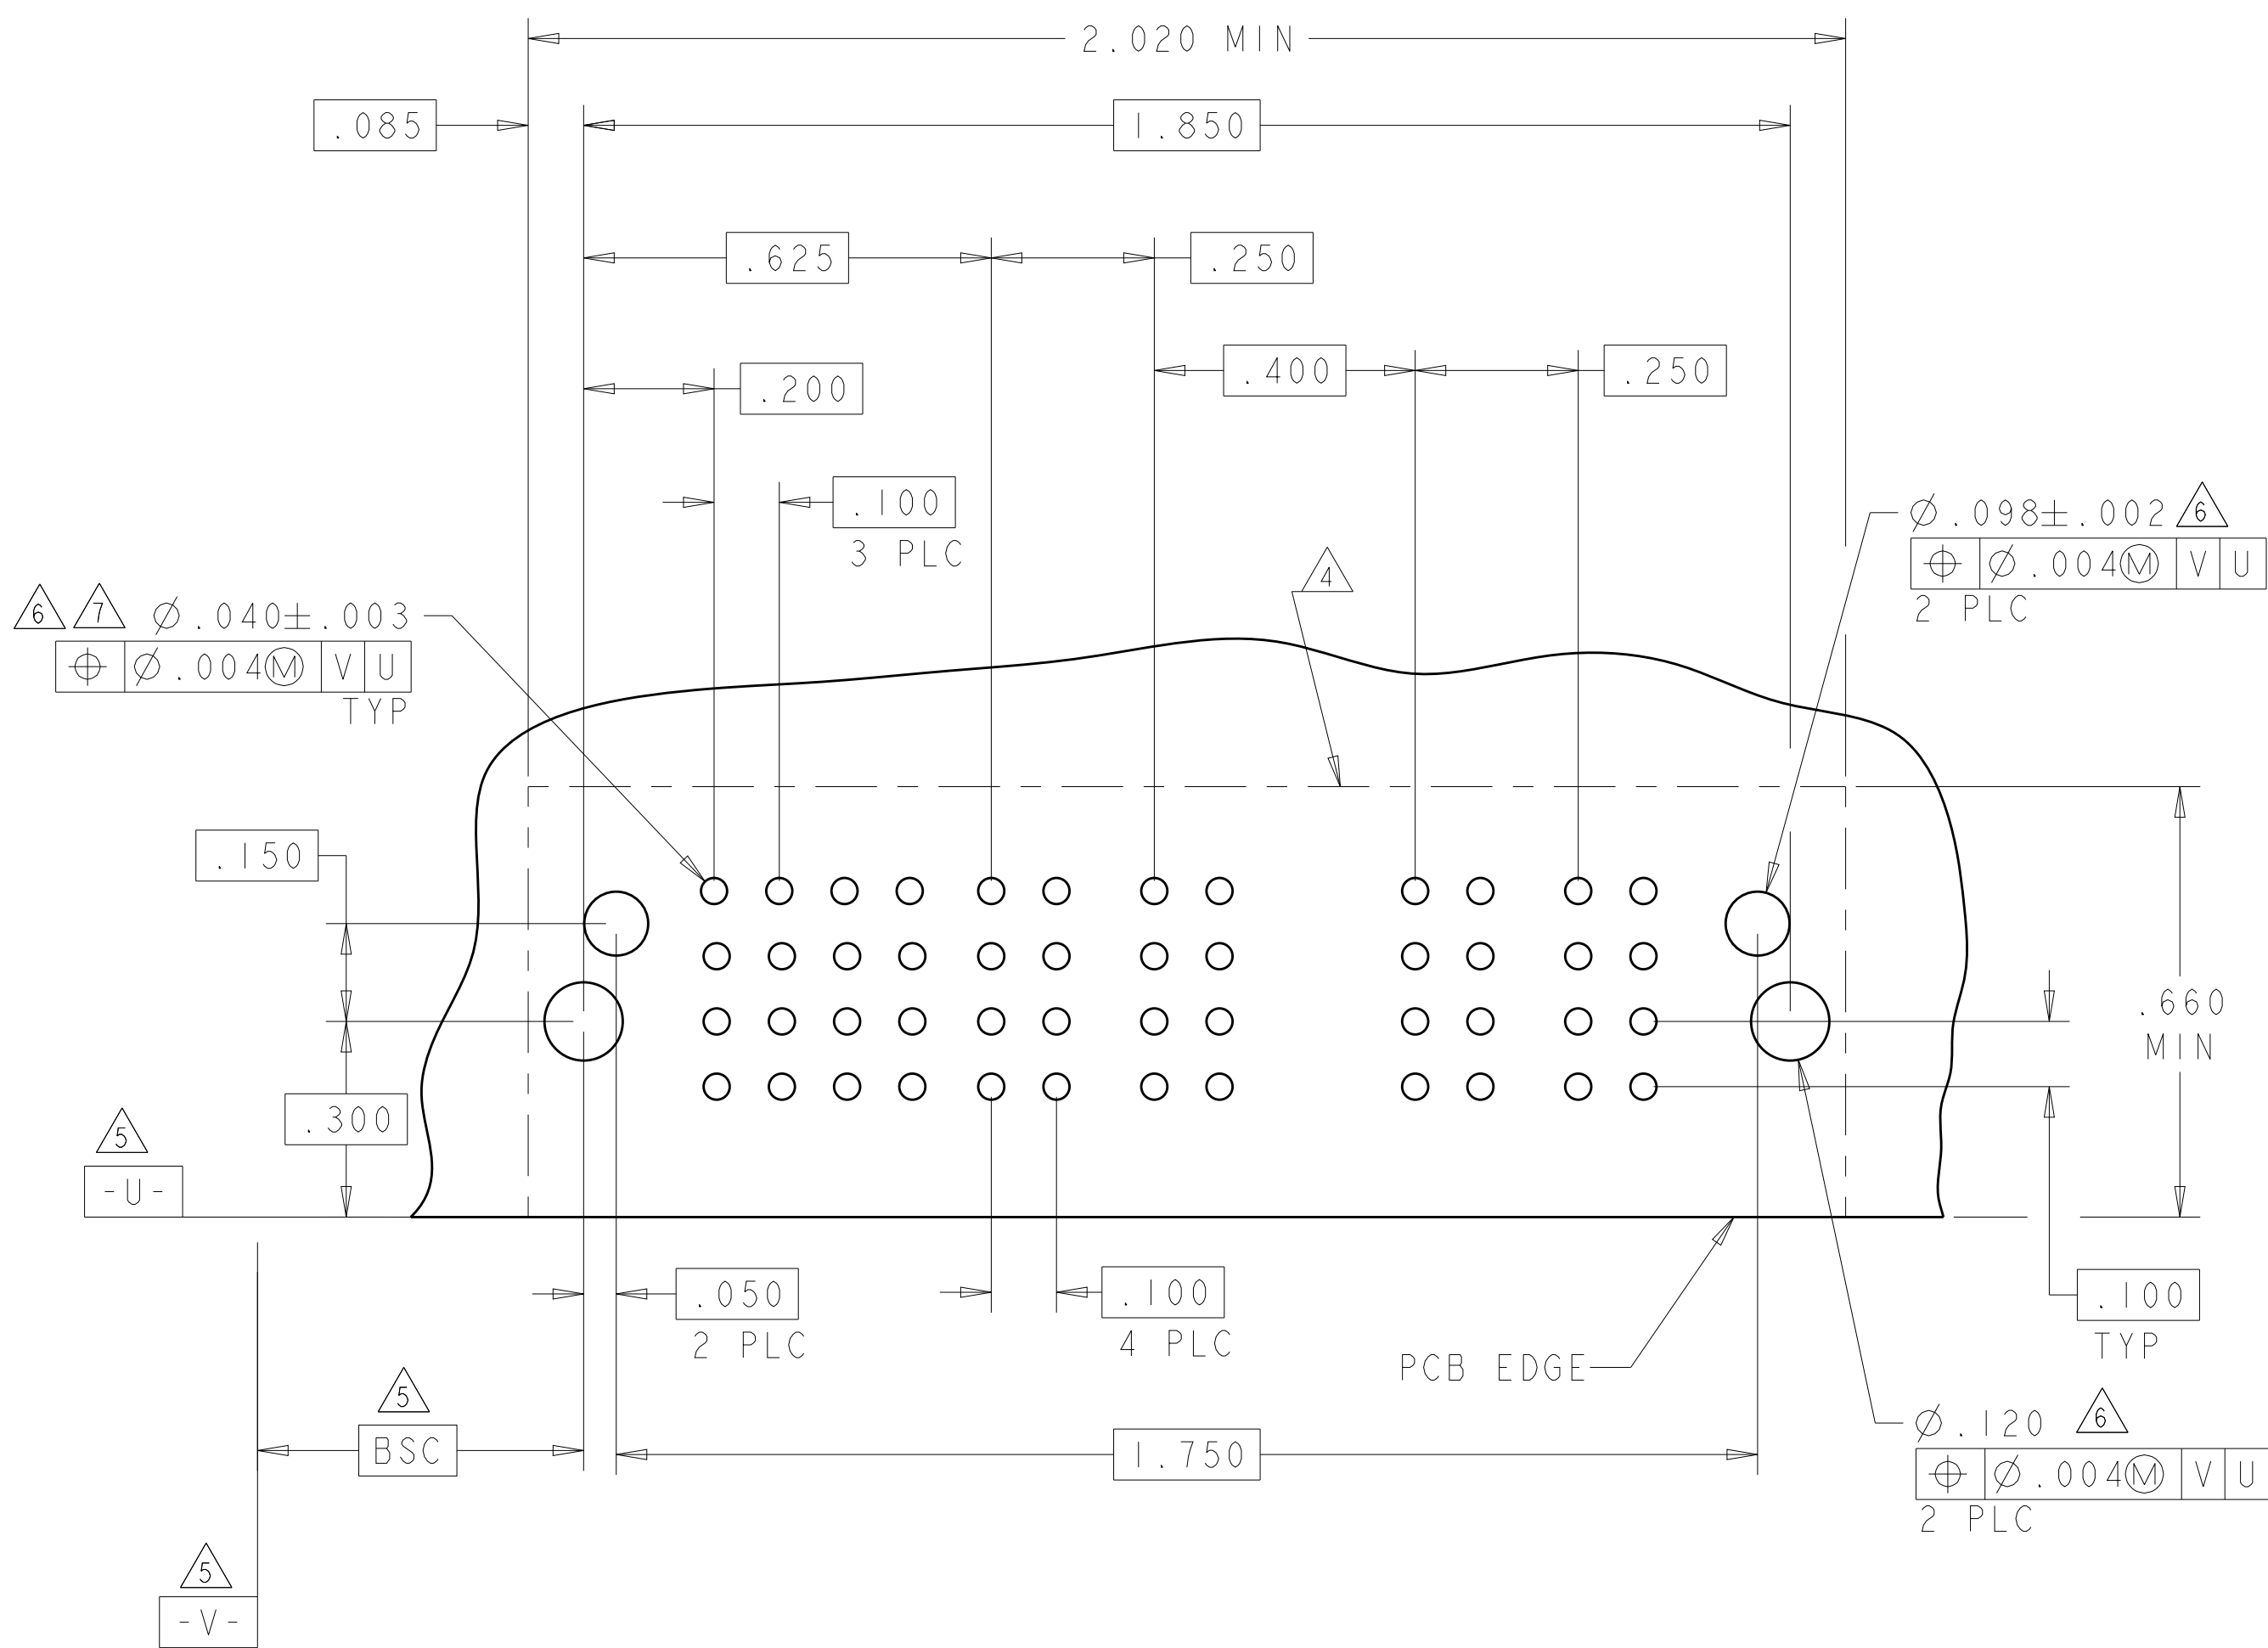
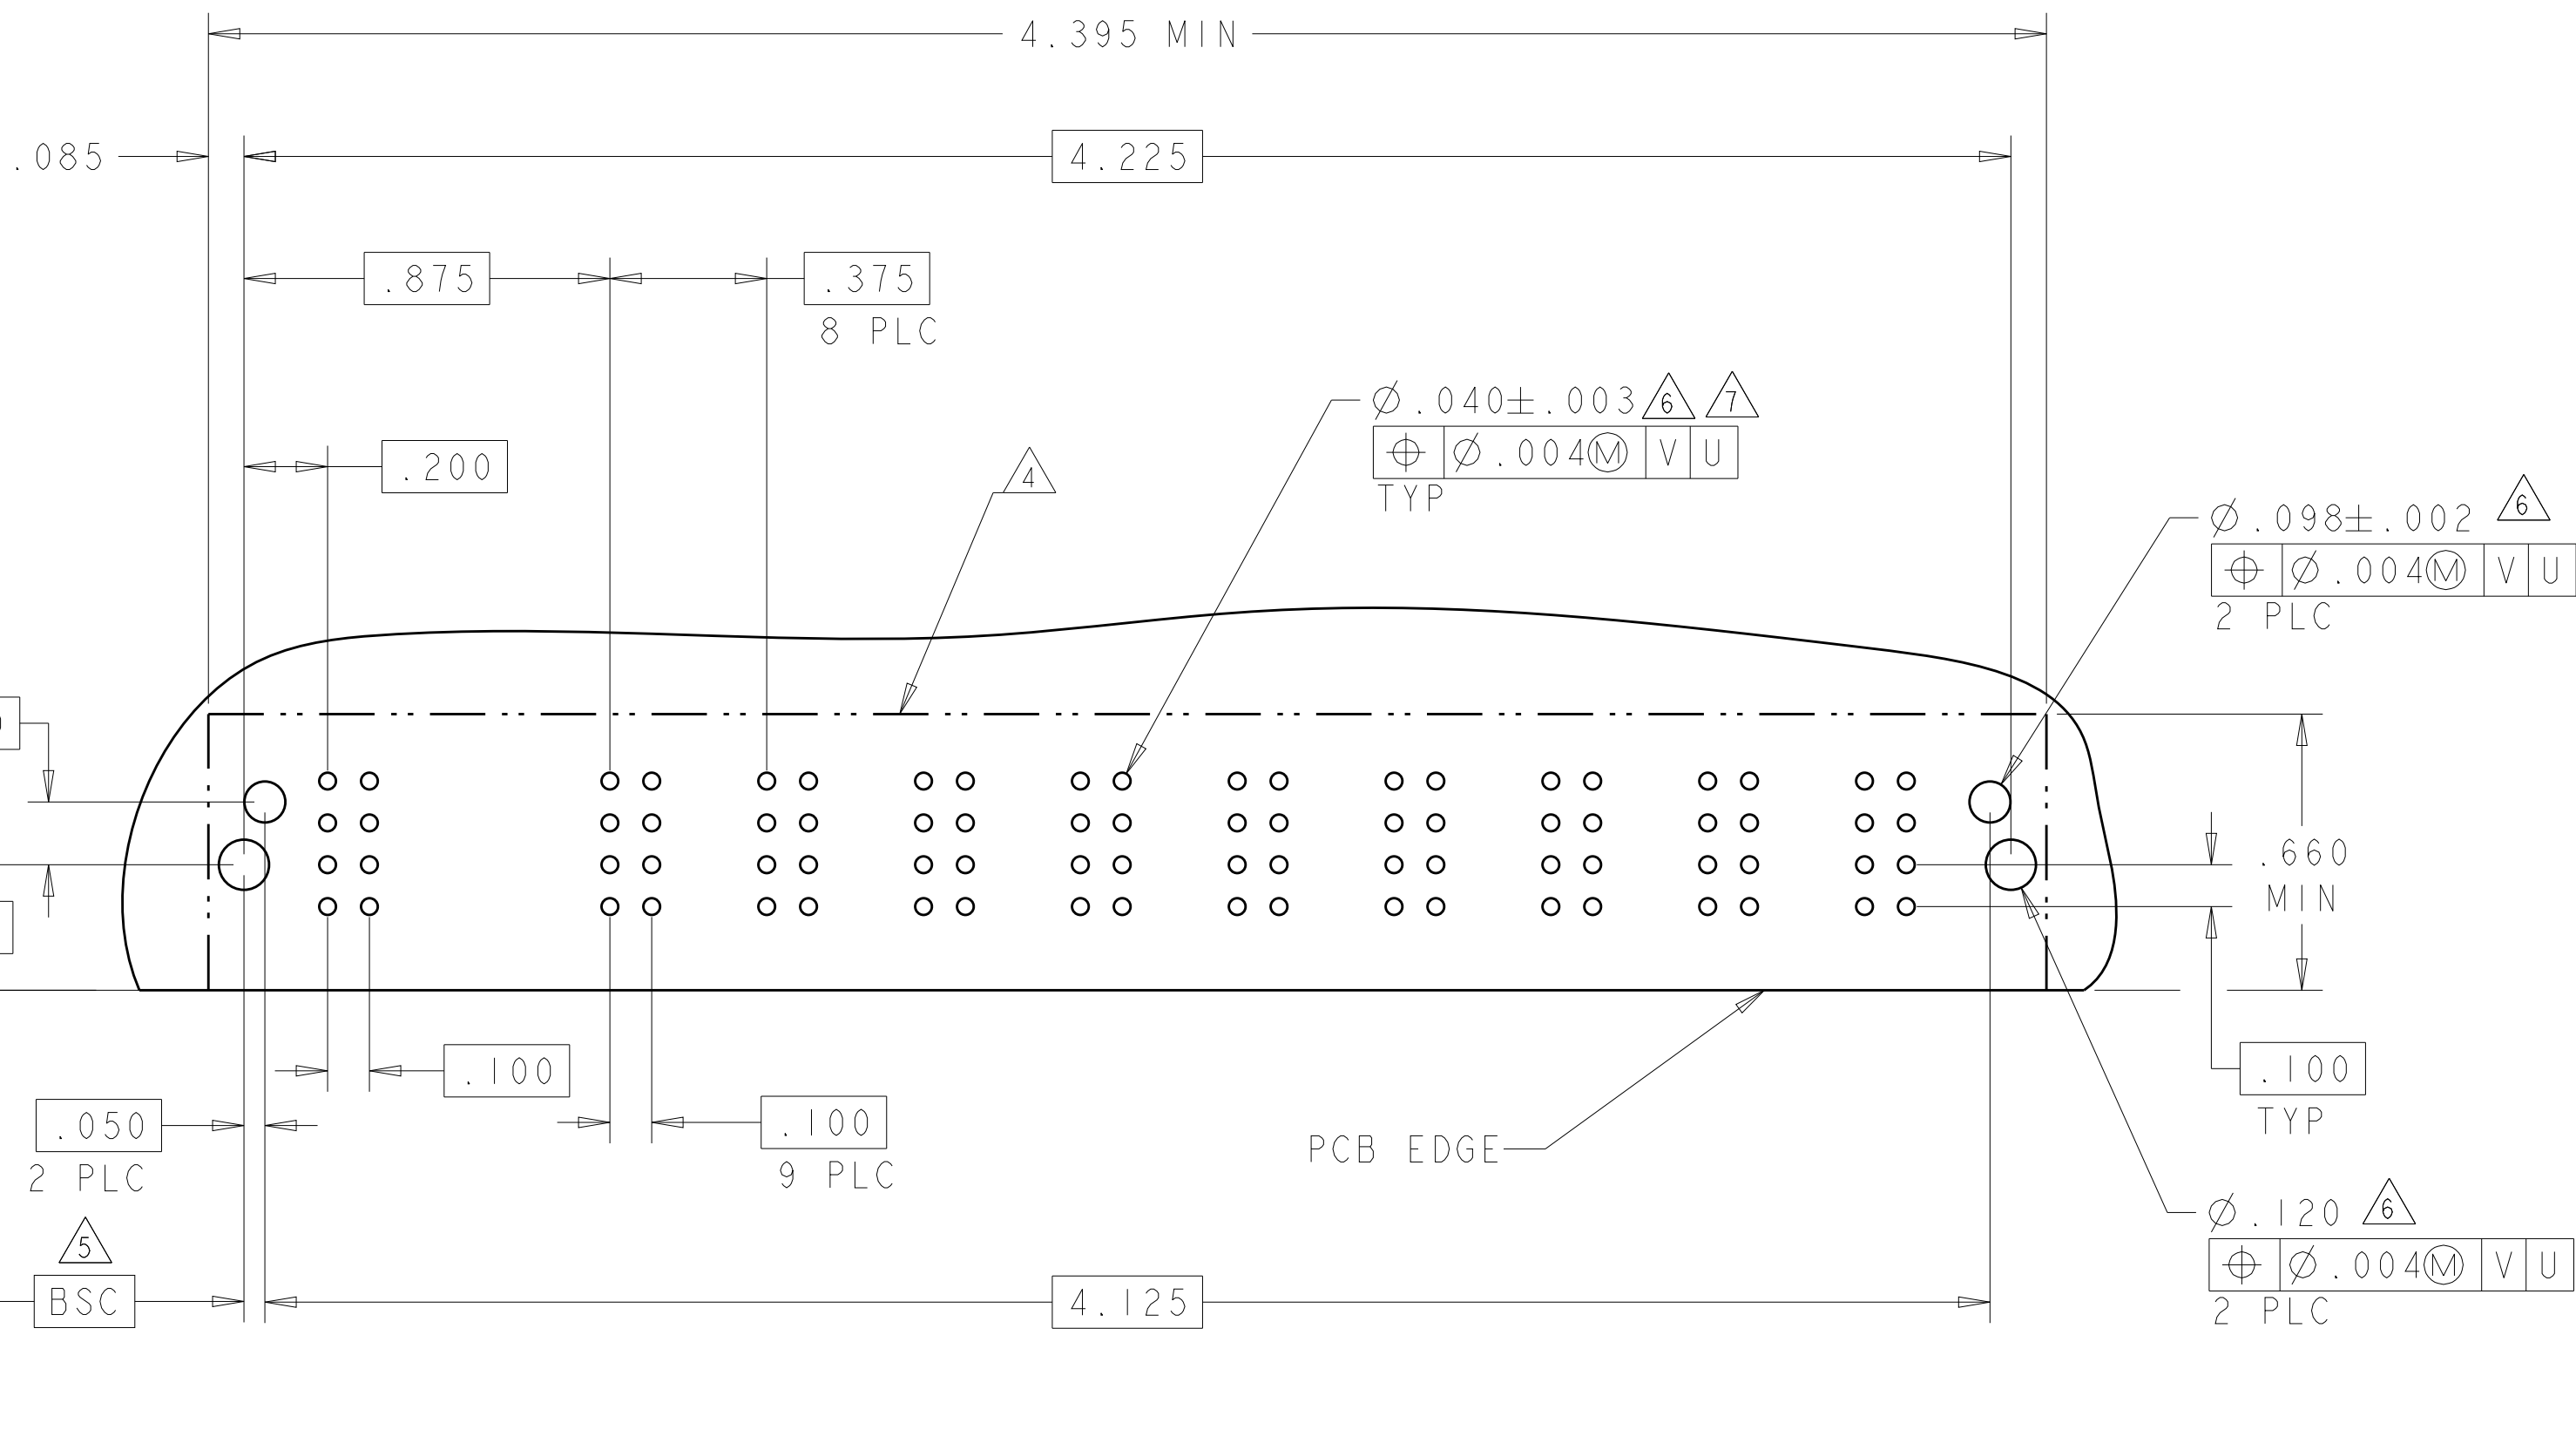


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		SIGNAL								POWER				
			1	2	3	4	5	6	7	8	P1	P2	P3	P4	
2-6450831-7	D		J	J	J	J	J	J	J	J	TM	TM	TM	TM	
	C		K	K	K	K	K	K	K	K					
	B		N	N	N	N	N	N	N	N					
32S + 4ACP	A	HD	S	S	S	S	S	S	S	S					HD

PART NUMBER	ROWS		SIGNAL								POWER								
			1	2	3	4	5	6	7	8	P1	P2	P3	P4	P5	P6	P7	P8	
2-6450831-8	D		E	J	J	J	J	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	
	C		K	K	K	K	K	K	K	K									
	B		N	N	N	N	N	N	N	N									
	A	HD	S	S	S	S	S	S	S	FS									HD
32S +8ACP																			

NO CONTACTS LOADED

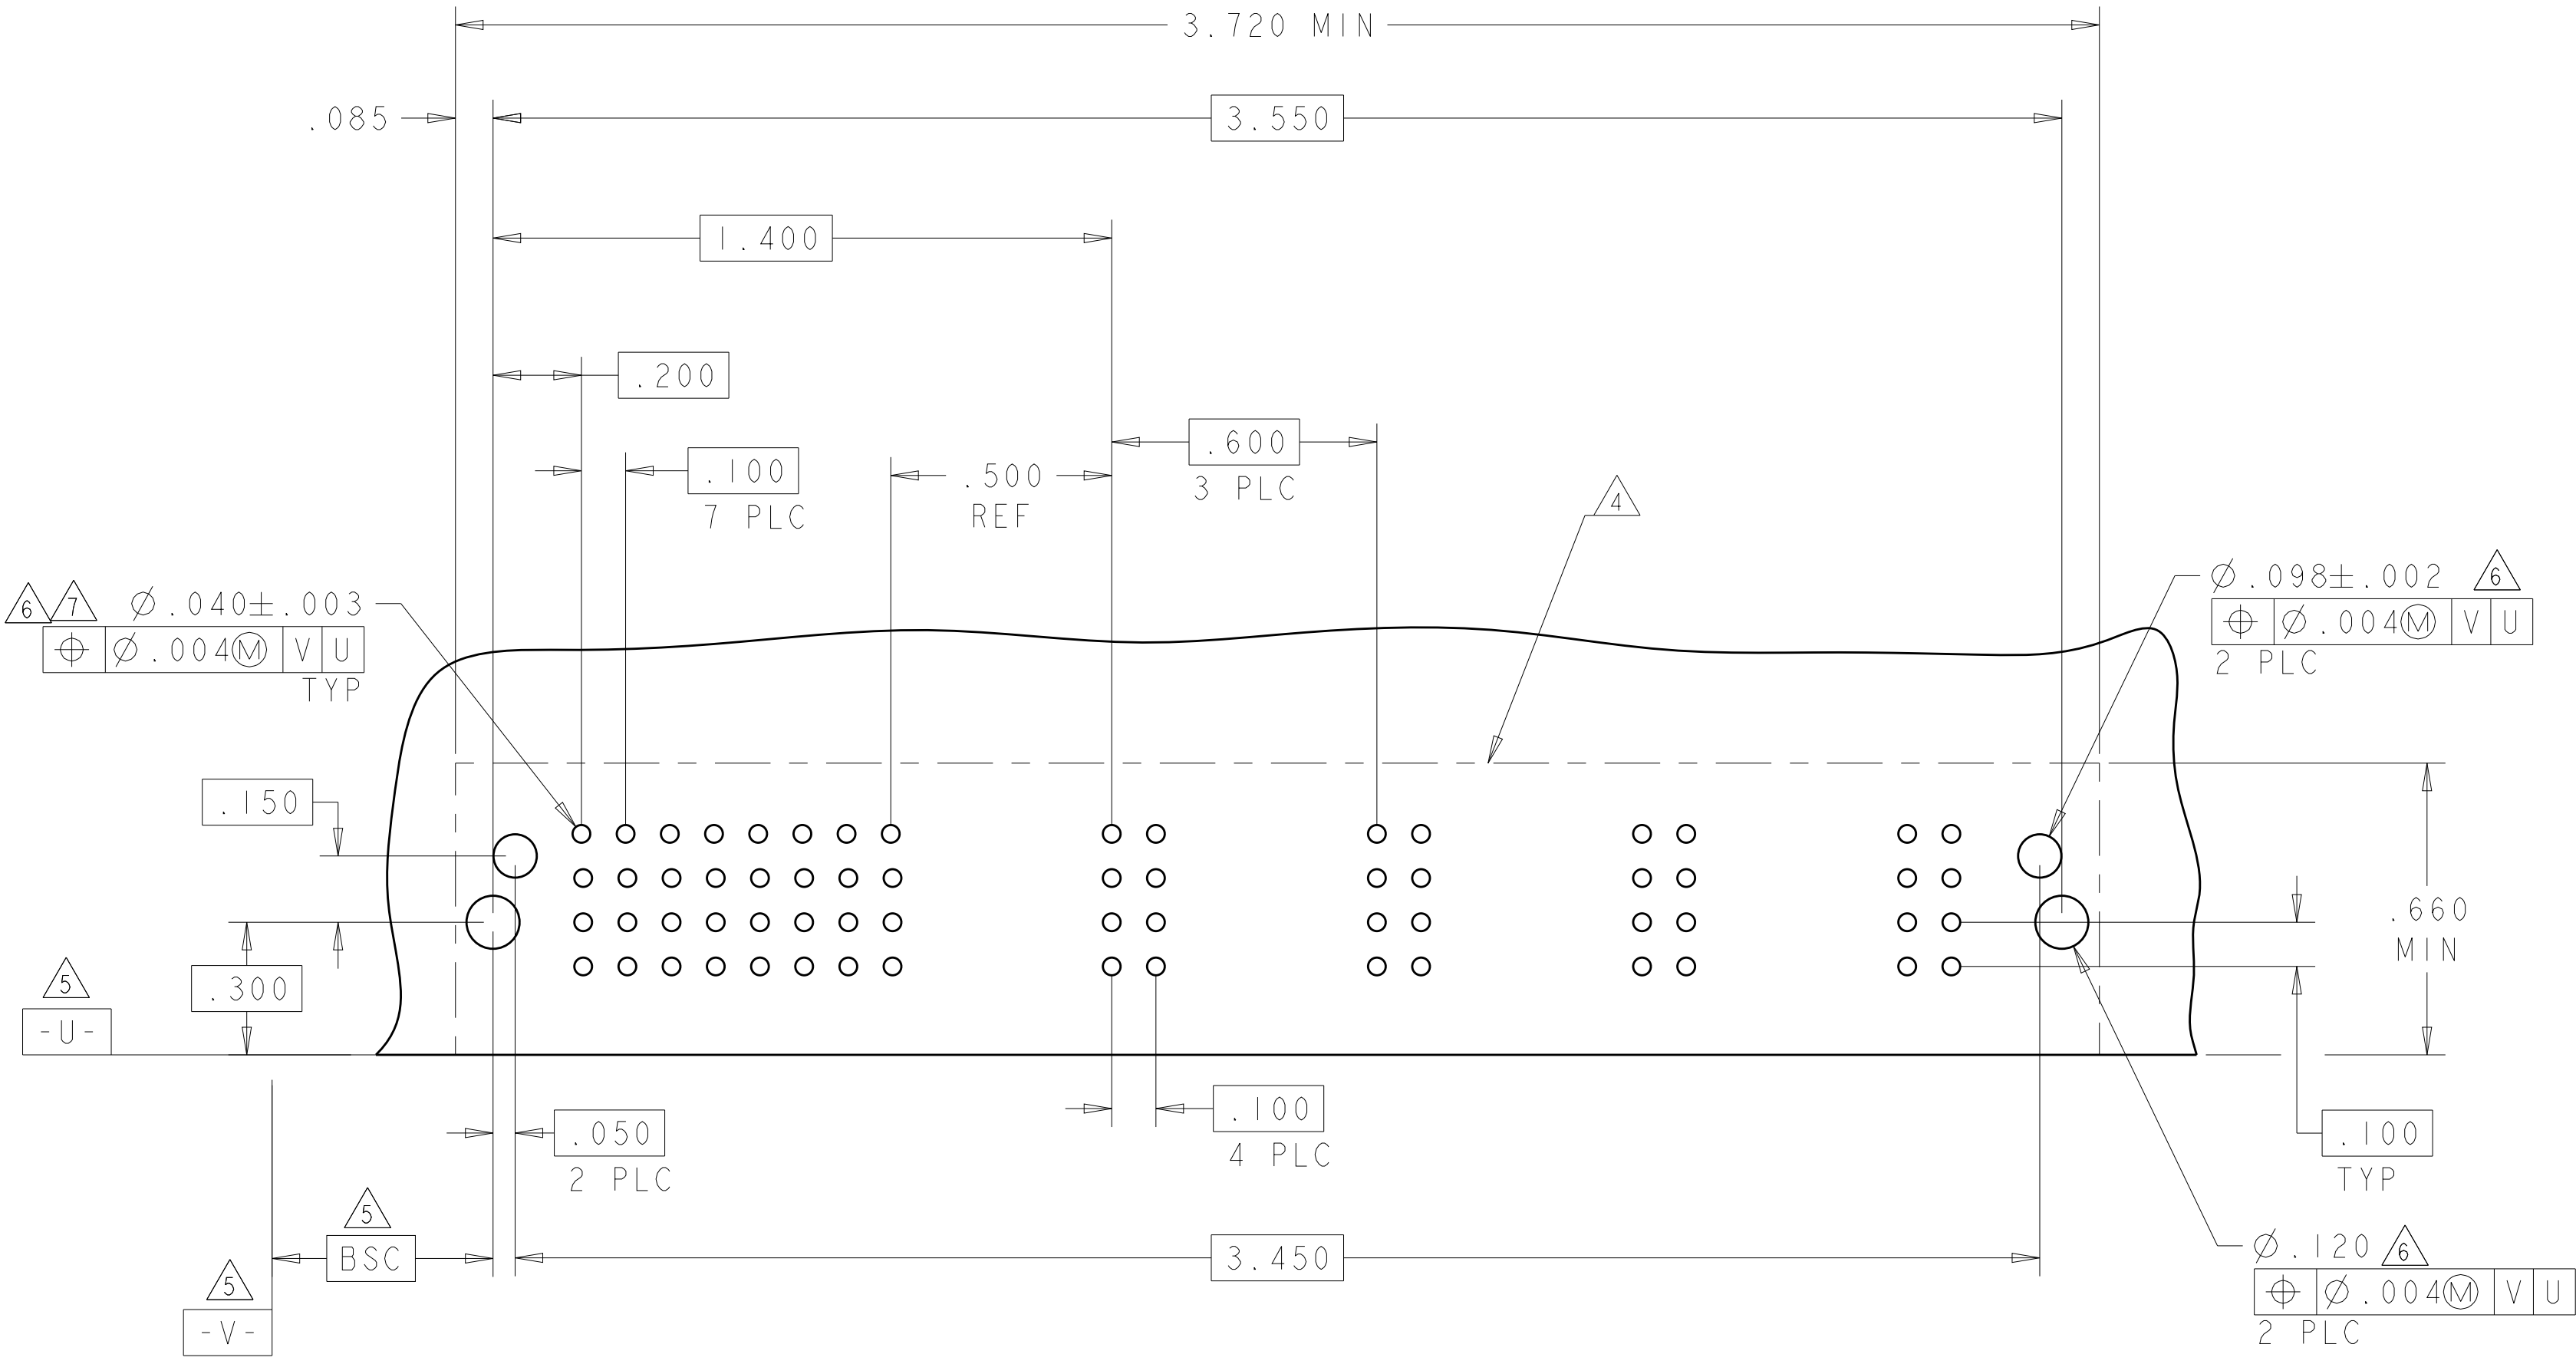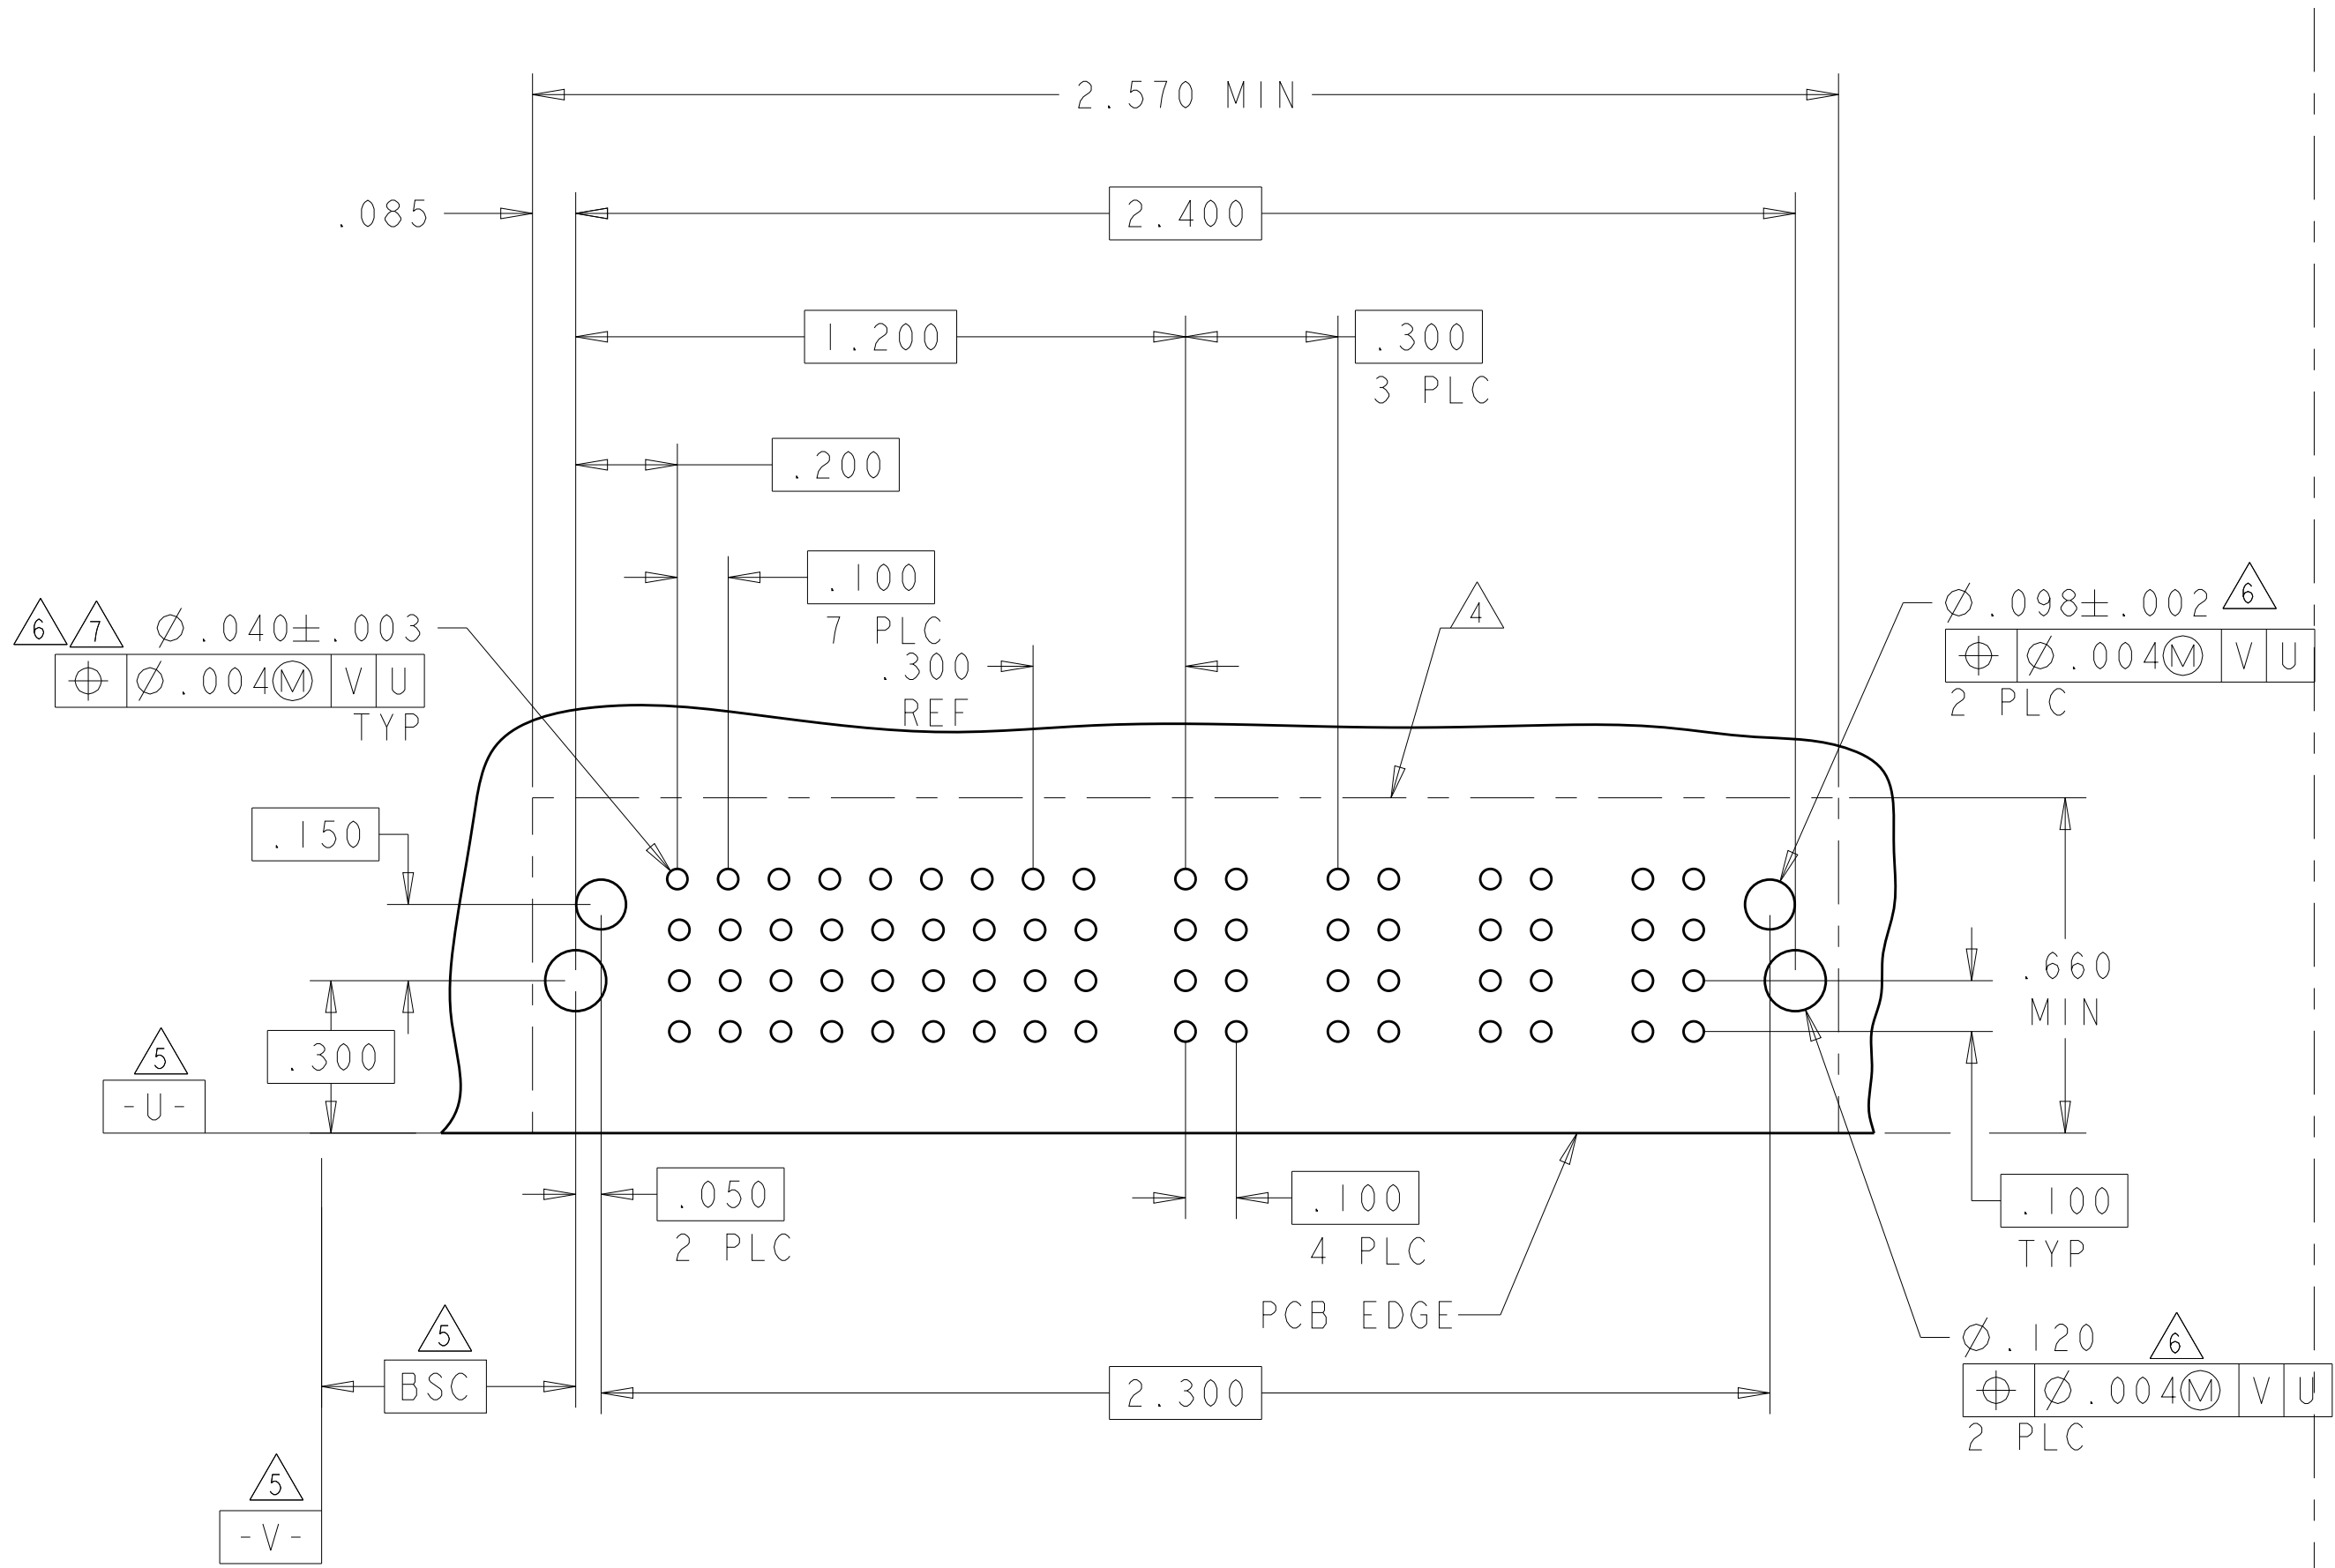


PART NUMBER	ROWS		SIGNAL					POWER				LOW POWER			
			I	2	3	4	5	P1	P2	P3	P4	LP1	LP2	LP3	
3-6450831-0	D		J	J	J	J	J	TM	TM	TM	TM	LM	LM	LMF	
	C		K	K	K	K	K								
	B		N	N	N	N	N								
	A		H	H	H	S	S								
20S + 4P + 3LP															

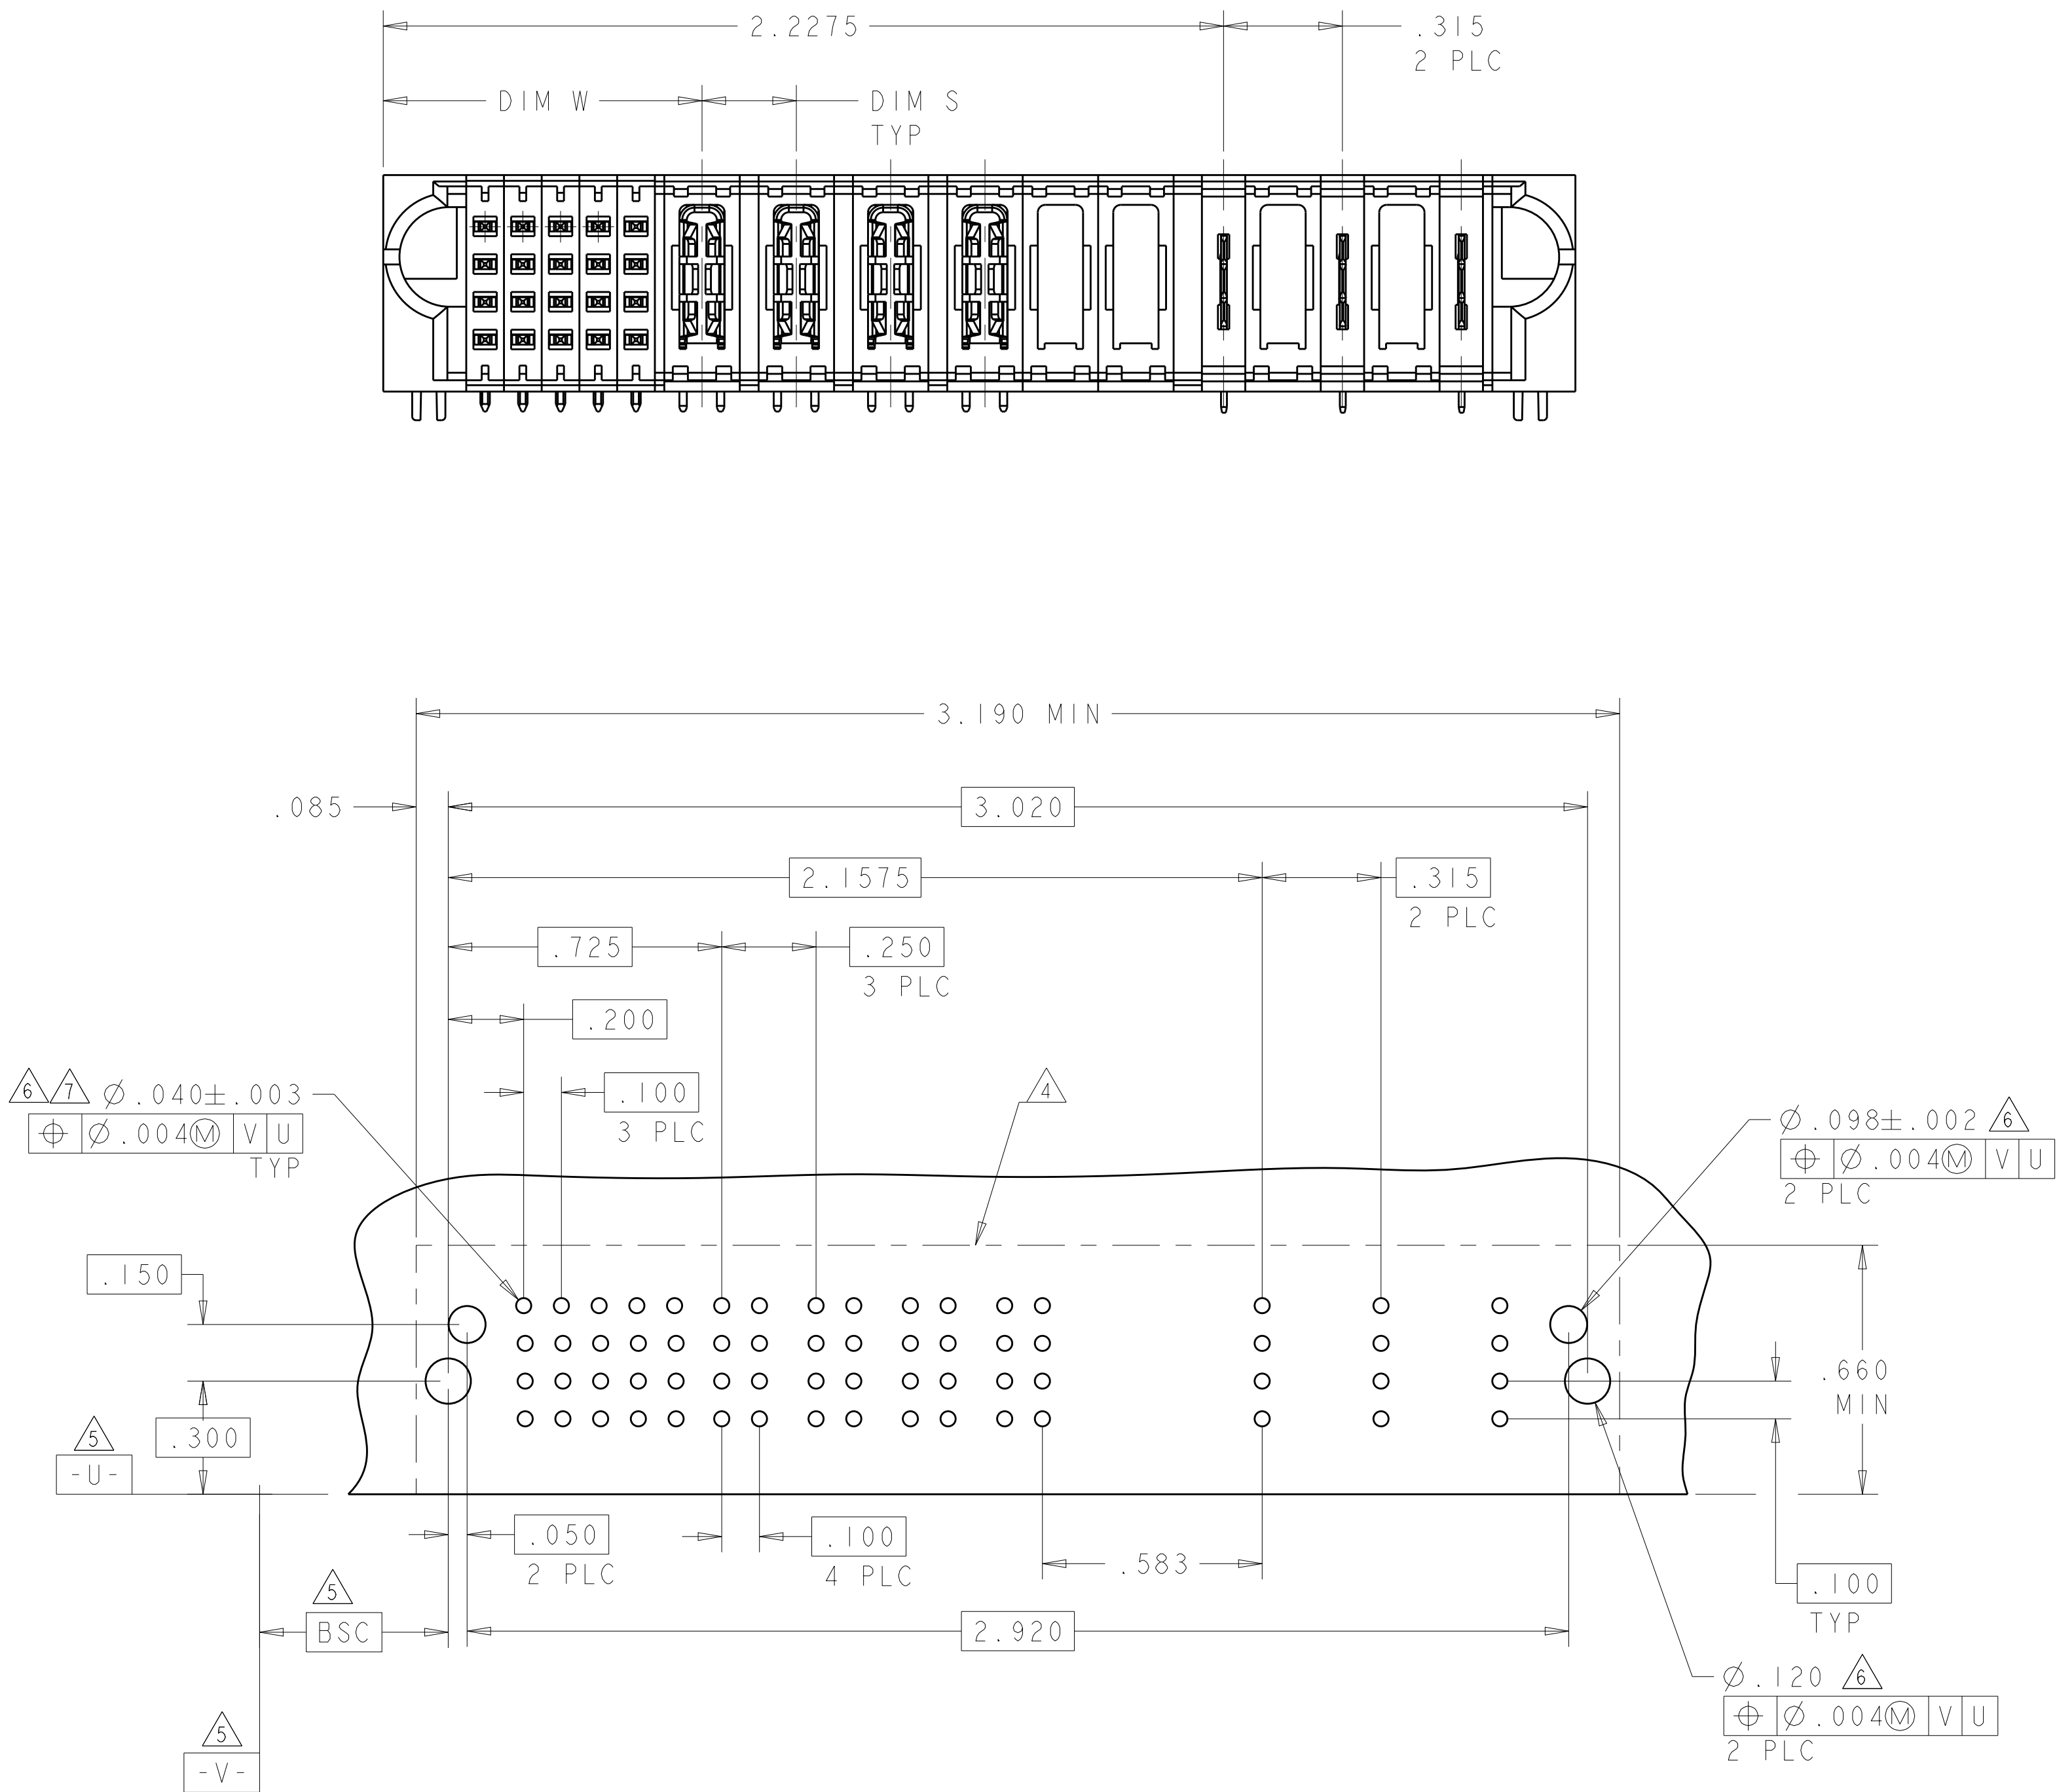4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		SIGNAL																												POWER				
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	P1	P2	P3	P4	
3-6450831-4	D C B A	HDI	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	
			K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	K	
			N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	N	
			S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	
112S + 4HDP																																			

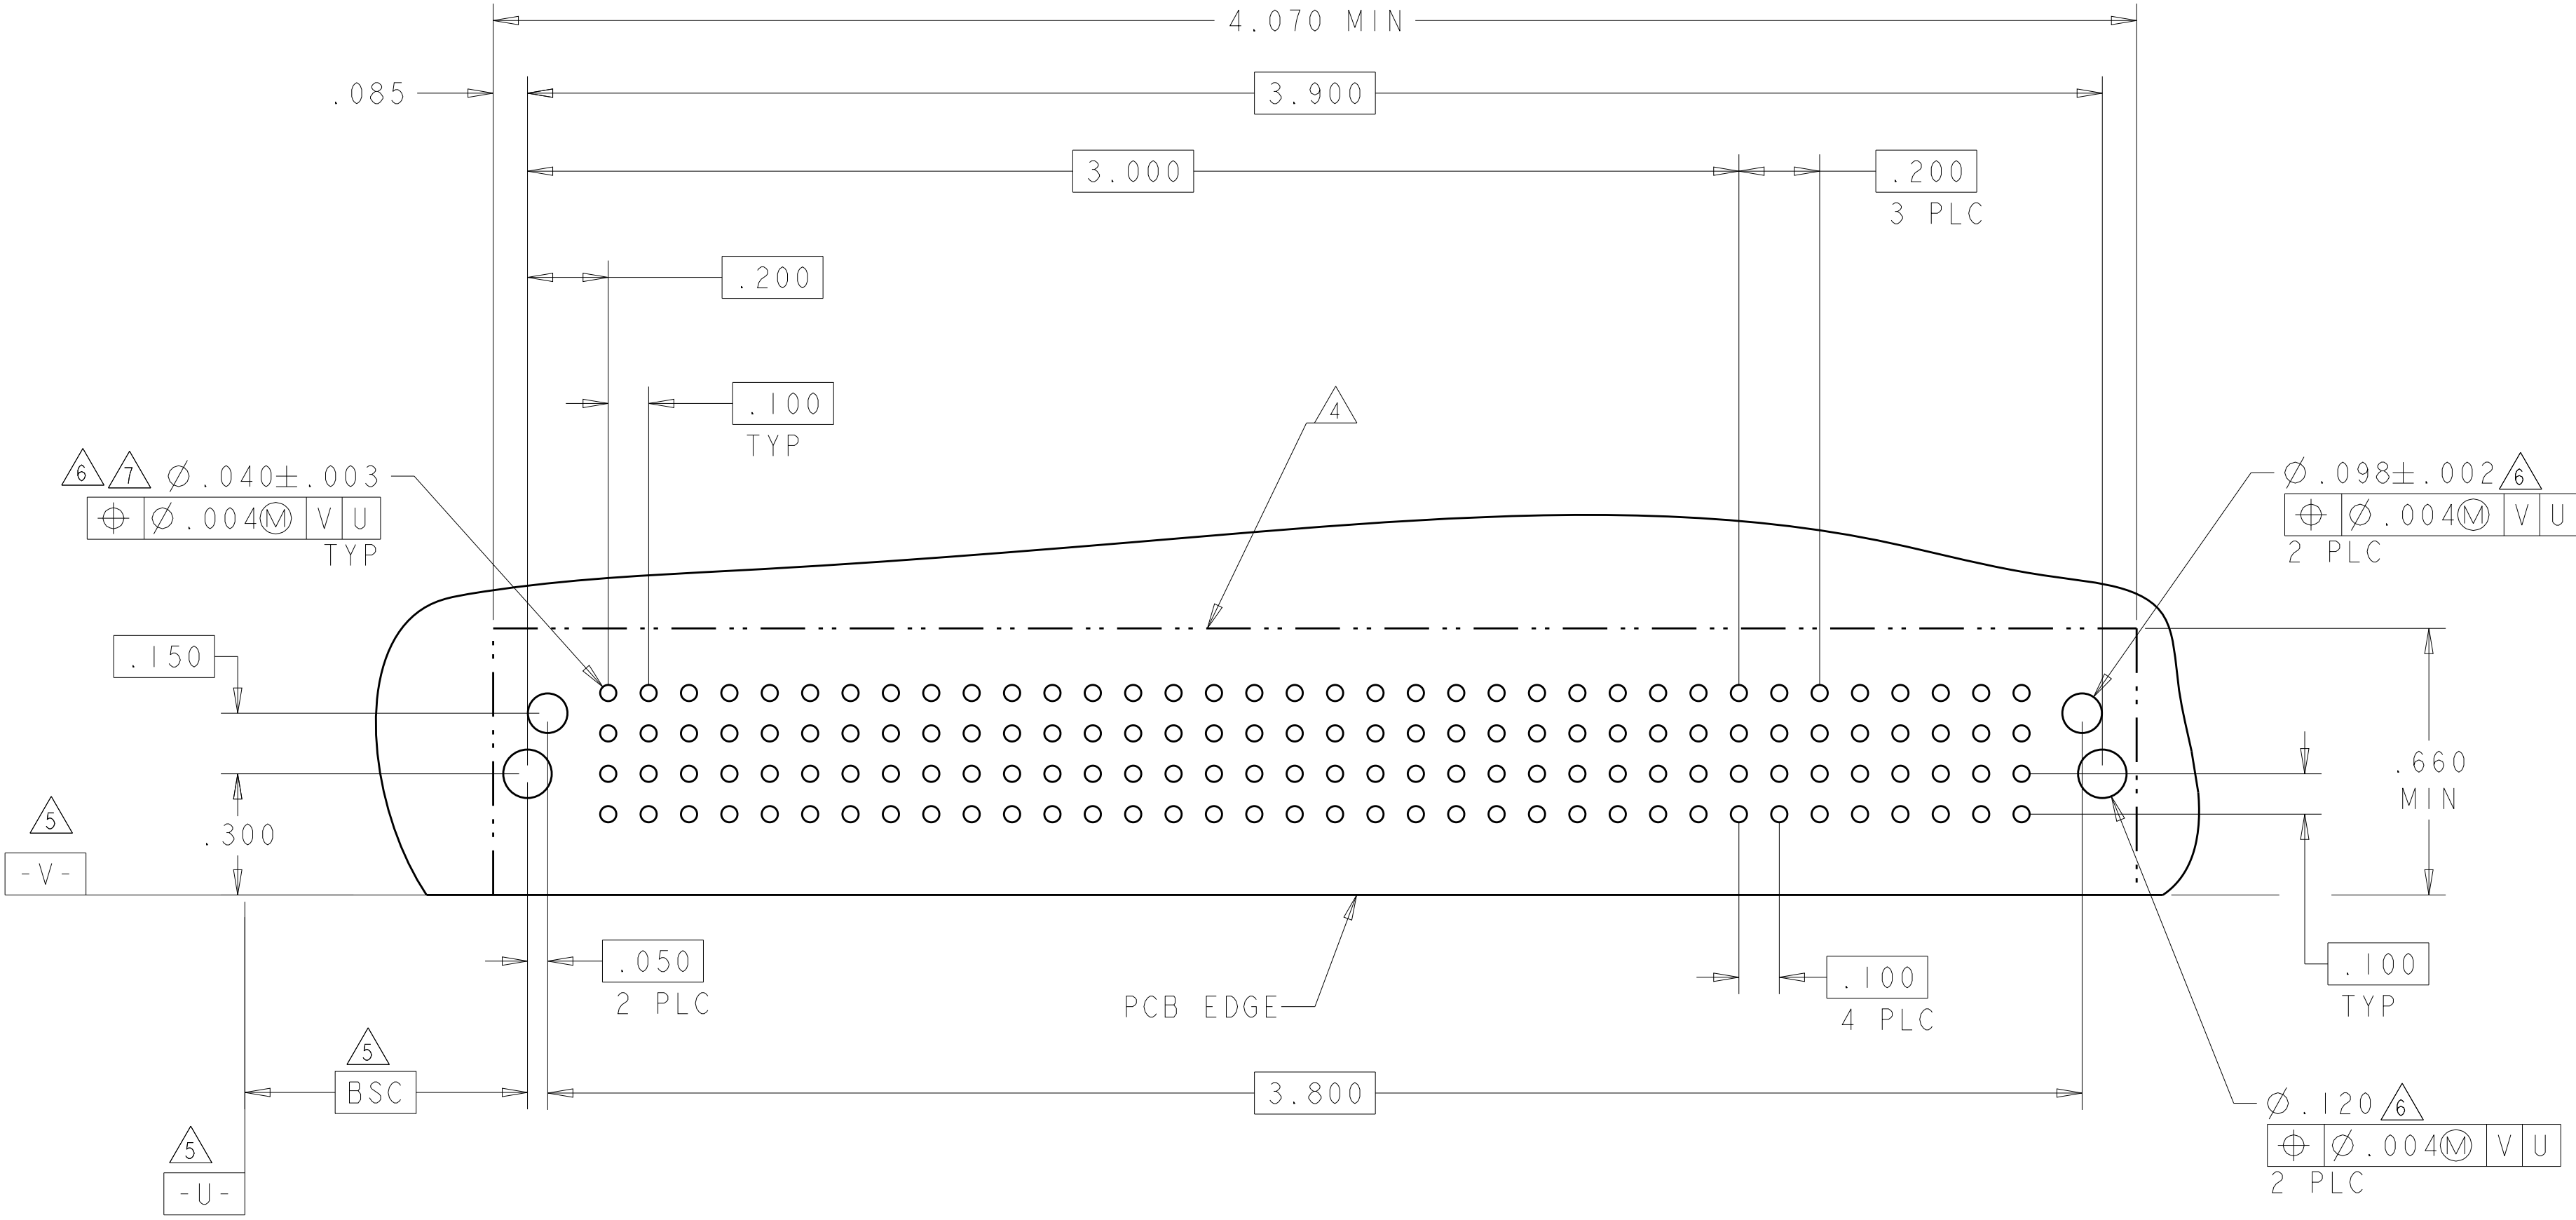

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9