

Discontinuation


The SNMPWEBCARD has been discontinued. Its replacement is the [WEBCARDLX](#). Please note that WEBCARDLX supports the EnviroSense2 family of sensors (e.g. E2MTHDI, E2MT, E2MTDO). WEBCARDLX is not compatible with ENVIROSENSE.

PowerAlert Console Launcher

To address Java Runtime Environment (JRE) issues with respect to the SNMPWEBCARD web interface, Tripp Lite recommends using the [PowerAlert Console Launcher](#). Alternatively, by switching to the WEBCARDLX you will gain a Java-free HTML5 web interface that is compatible with the most popular internet browsers available on mobile, tablet and desktop platforms.

SNMP Management Accessory Card, SmartPro or SmartOnline UPS Systems

MODEL NUMBER: **SNMPWEBCARD**

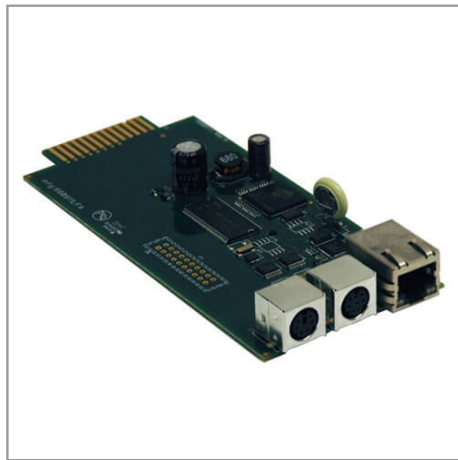

Operate any compatible SmartPro or SmartOnline UPS as a managed device on your network. Monitor and control the UPS using an SNMP network management platform, PowerAlert Console Launcher, SSH or telnet.

Description

The SNMPWEBCARD turns a SmartPro or SmartOnline UPS with an expansion slot into a device you can manage on your network. By inserting the SNMPWEBCARD into the slot and using the SNMP network management platform, PowerAlert Console Launcher, SSH or Telnet, you can monitor and control the UPS and data in your server room, data center or network closet.

Keep an eye on site electrical data, UPS self-test logs and logged power events, such as blackouts, brownouts and over-voltages. You can even remotely reboot locked network equipment without disrupting power to other devices when using the SNMPWEBCARD with controllable outlets or remotely switchable outlets available on select Tripp Lite UPS systems. You can also use the SNMPWEBCARD to copy the configuration of a networked UPS and transfer it to another device.

Two-tier access allows two people to log in and monitor or control the UPS, while more than two can simultaneously view activity. If an electrical or UPS problem occurs on-site, you'll be notified immediately via email, SMS or SNMP trap. Real-time clock support maintains current day and date even after a UPS shutdown. NTP (Network Time Protocol) support enables automatic updates to the real-time clock from an NTP server.

Multiple protocols are supported, including IPv4*, IPv6*, SMTP, SNMPv1, SNMPv2c, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP and SCP. DHCP/Manual configuration support enables network settings to be assigned automatically or manually.

**For HTTP and HTTPS support, we recommend the WEBCARDLX that has a Java-free HTML5 web browser interface that is fully compatible with modern desktop and mobile browsers.*

Highlights

- Enables remote UPS management via SNMP, PowerAlert Console Launcher, SSH or telnet
- Sends user-configurable alerts via SNMP, SMS or email
- Reboots unresponsive equipment without requiring a site visit
- Allows mass configuration and updating of multiple units
- Keeps logs of power events, alerts and electrical data

System Requirements

- UPS or PDU with SNMPWEBCARD slot
- Firmware compatible with PowerAlert Network Shutdown Agent v0057 (Windows). It is NOT compatible with v0054.

Package Includes

- SNMPWEBCARD SNMP Management Accessory Card
- Configuration cable (73-1025)
- Faceplates
- Installation Manual



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Features

Enhanced UPS Management and Control

- Makes any slot-equipped SmartPro or SmartOnline UPS a managed network device
- Remotely monitor site electrical data, UPS self-test logs, alert logs and logged power events like blackouts, brownouts and overvoltages
- Reboot locked network equipment without disrupting power to other loads (when used with controllable outlets or remotely switchable outlets on select UPS systems)
- Enables the configuration of a networked UPS to be copied and transferred to multiple devices
- Monitor temperature and humidity, as well as alarm, security and telecom devices (with optional ENVIROSENSE module, sold separately)

Flexible Access

- Two-tier access—two users can monitor or control the UPS at the same time
- Multiple users can view activity simultaneously
- Monitor and manage remotely via Telnet, SNMP, SSH or the PowerAlert Console Launcher
- Create an encrypted connection using optional SSL setting

Advanced Network Management Tools

- Shut down remote operating systems via your network (OS must have PowerAlert Network Shutdown Agent version 57 installed)
- Receive alert notifications via email, SMS or SNMP trap
- Real-time clock support maintains current day/date even after UPS shutdown

Broad Compatibility

- Support multiple protocols, including SMTP, SNMPv1, SNMPv2c, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP and SCP.
- 10/100 Mbps auto-sensing ensures optimal communication compatibility with current 10/100 Base-T network
- DHCP/Manual configuration support enables automatic or manual assignment of network settings

TAA-Compliant

- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

OVERVIEW	
UPC Code	037332099419
PHYSICAL	



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Shipping Dimensions (hwd / cm)	5.79 x 17.50 x 16.51
Shipping Dimensions (hwd / in.)	2.28 x 6.89 x 6.50
Shipping Weight (kg)	0.29
Shipping Weight (lbs.)	0.63
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9