

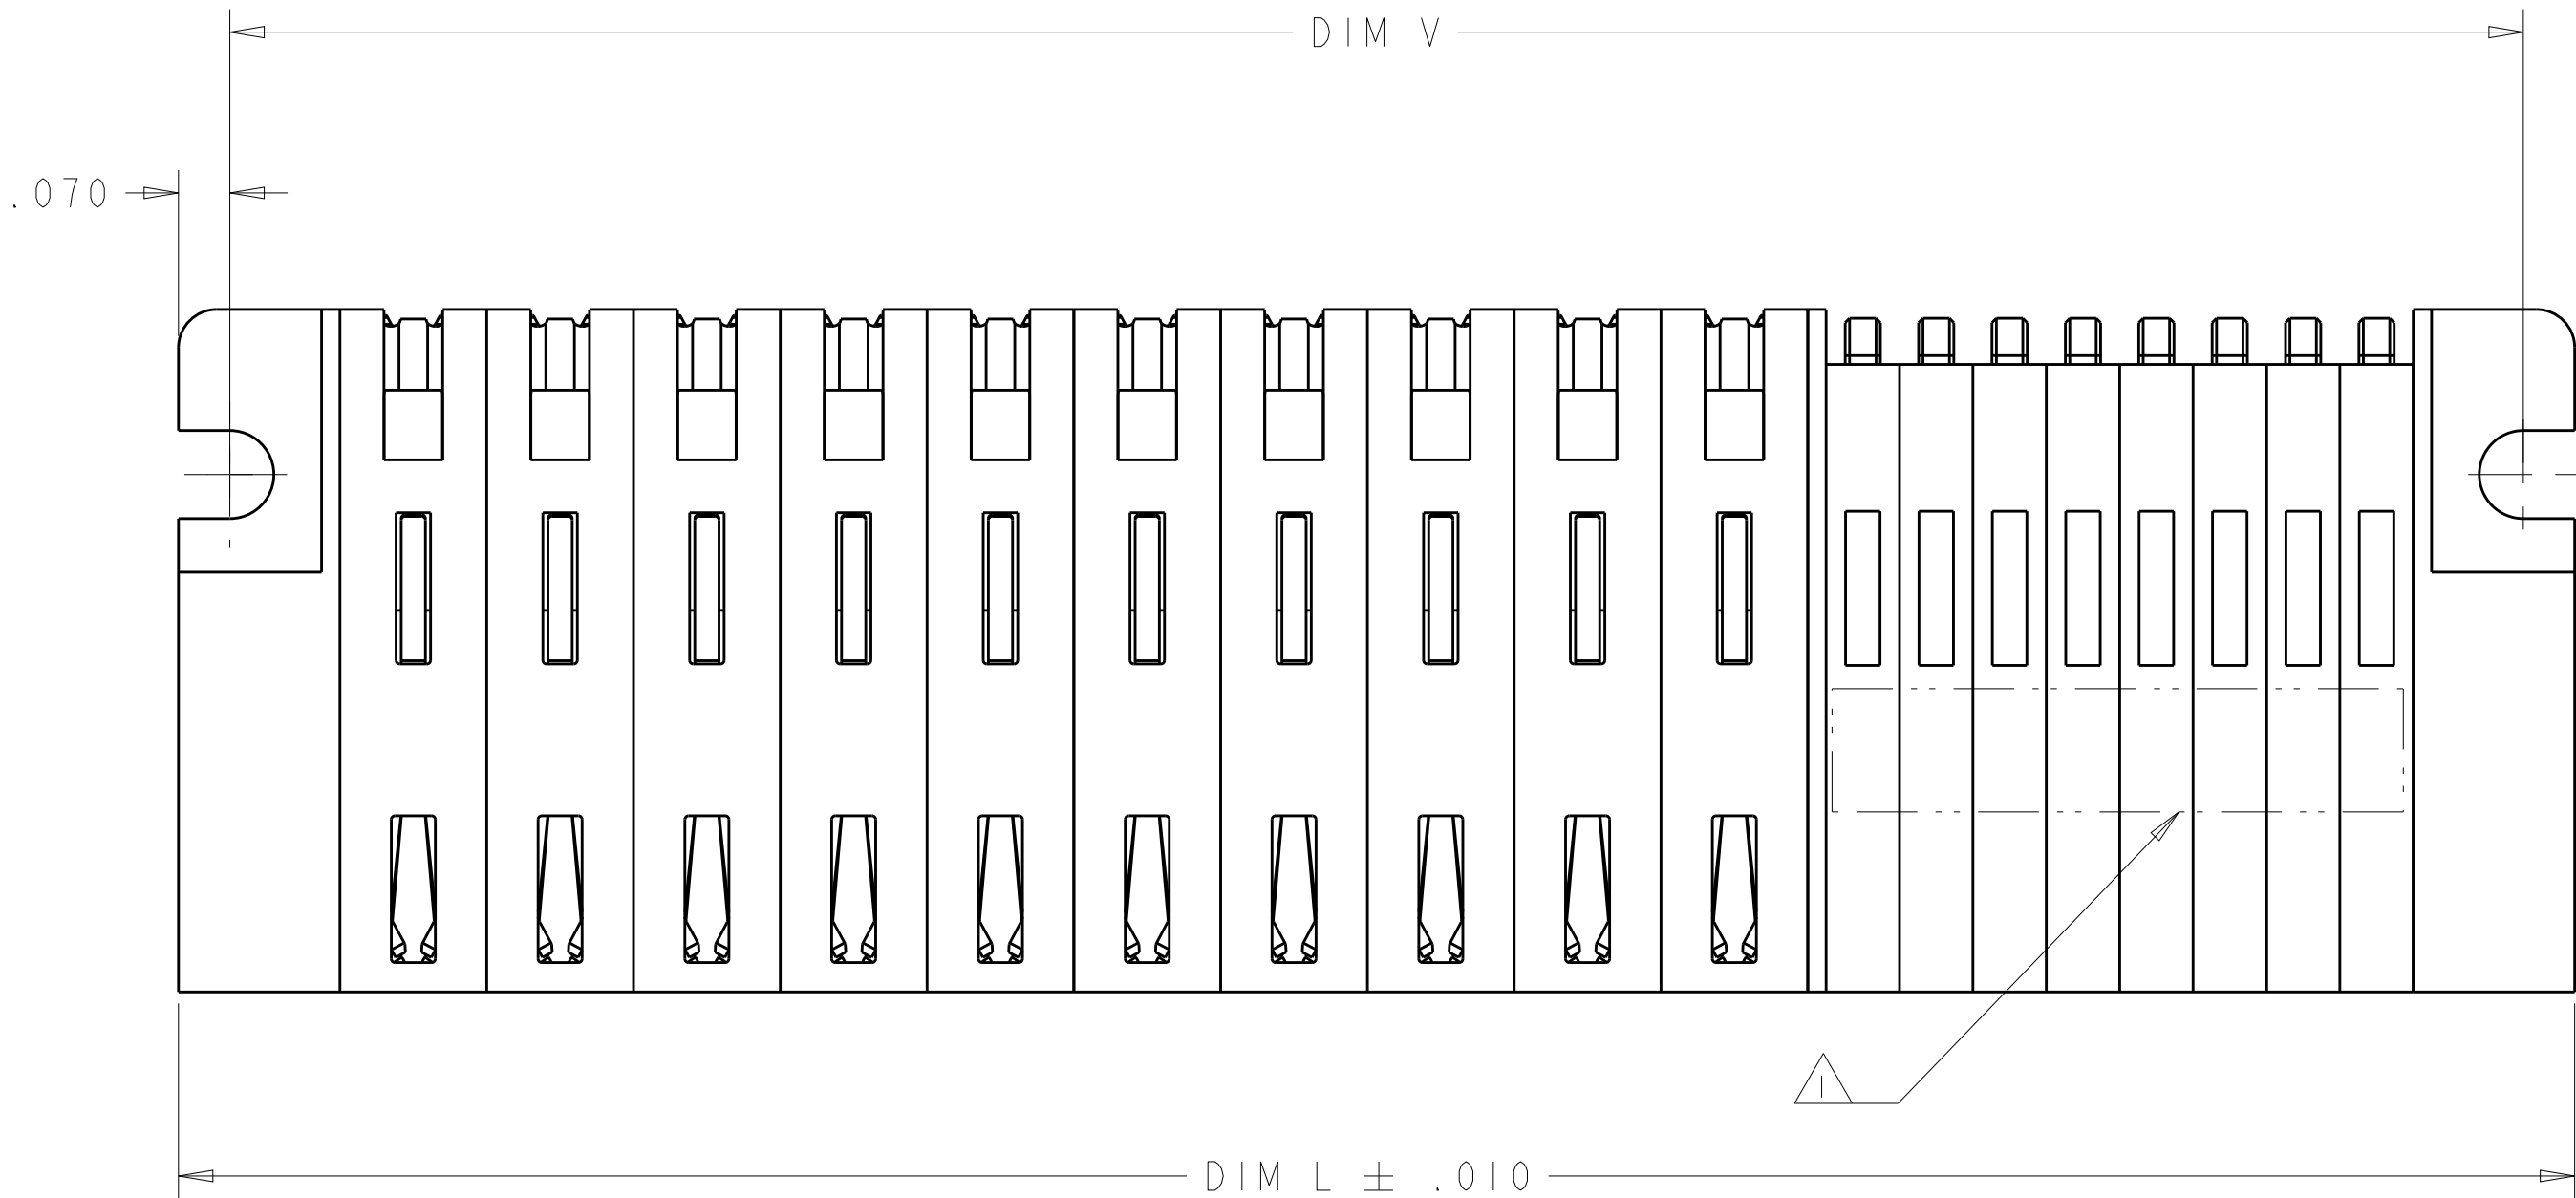
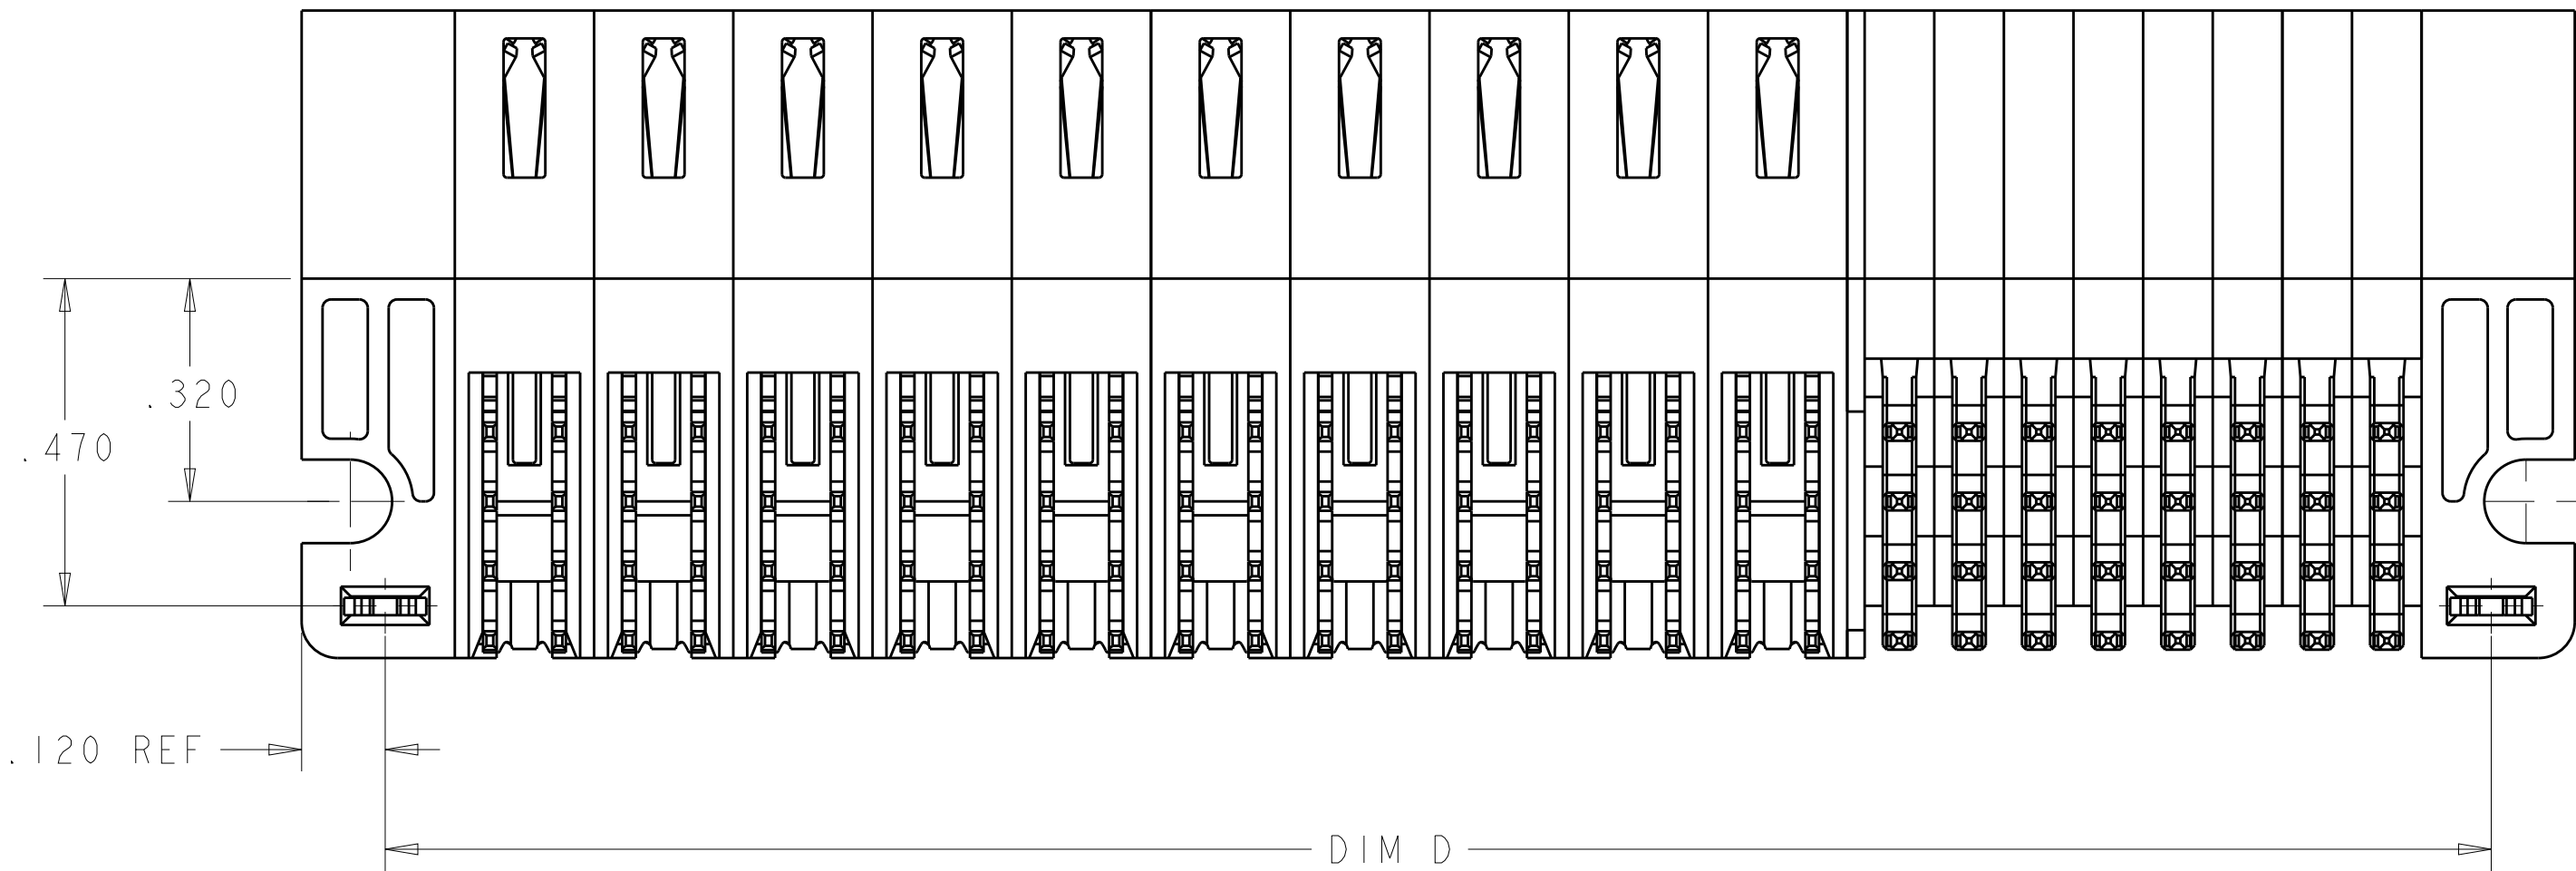


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			K4	REVISED 4-7 BY CUSTOMER	18MAY2015	CZ	SZ

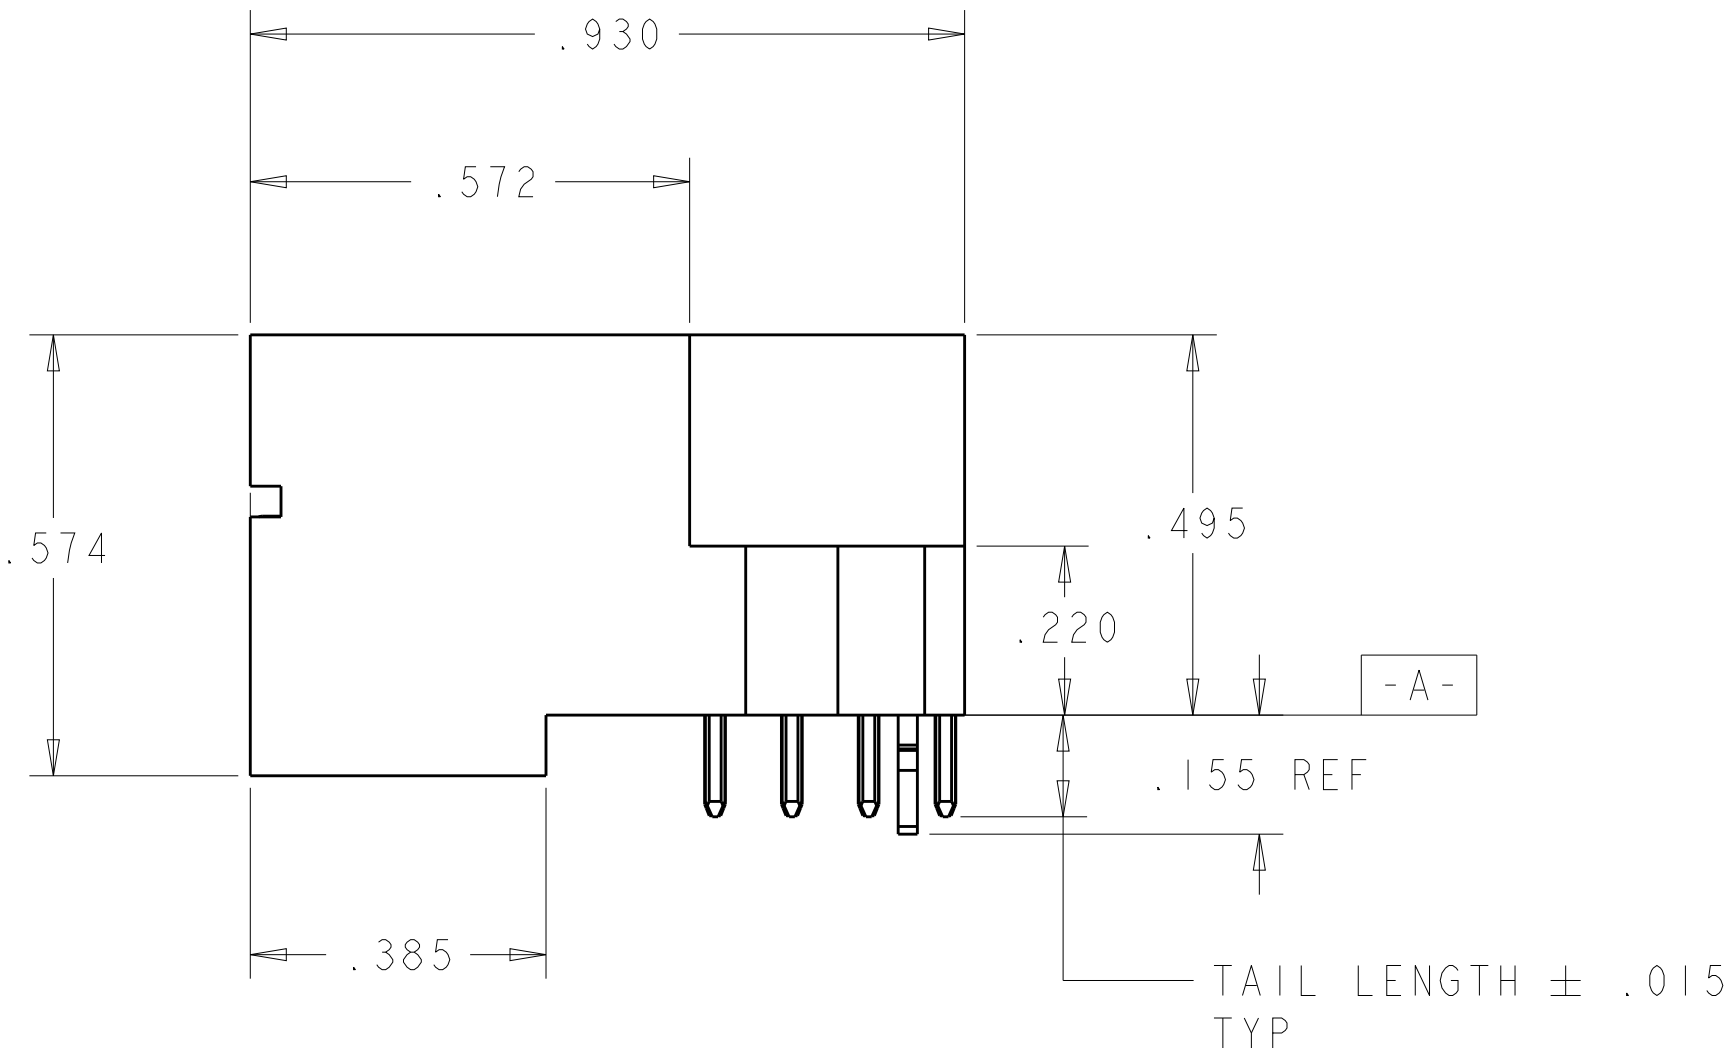

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL:
HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF SIGNAL CONTACTS AND POWER CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ± .0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ± .030 HOLE
- 8 FOR CONFIGURATION "L/P", "P/LP/S", PLEASE REFER TO SHEET 3.
- 9 VARIABLE DIMENSIONS PLEASE SEE PART TABLE.

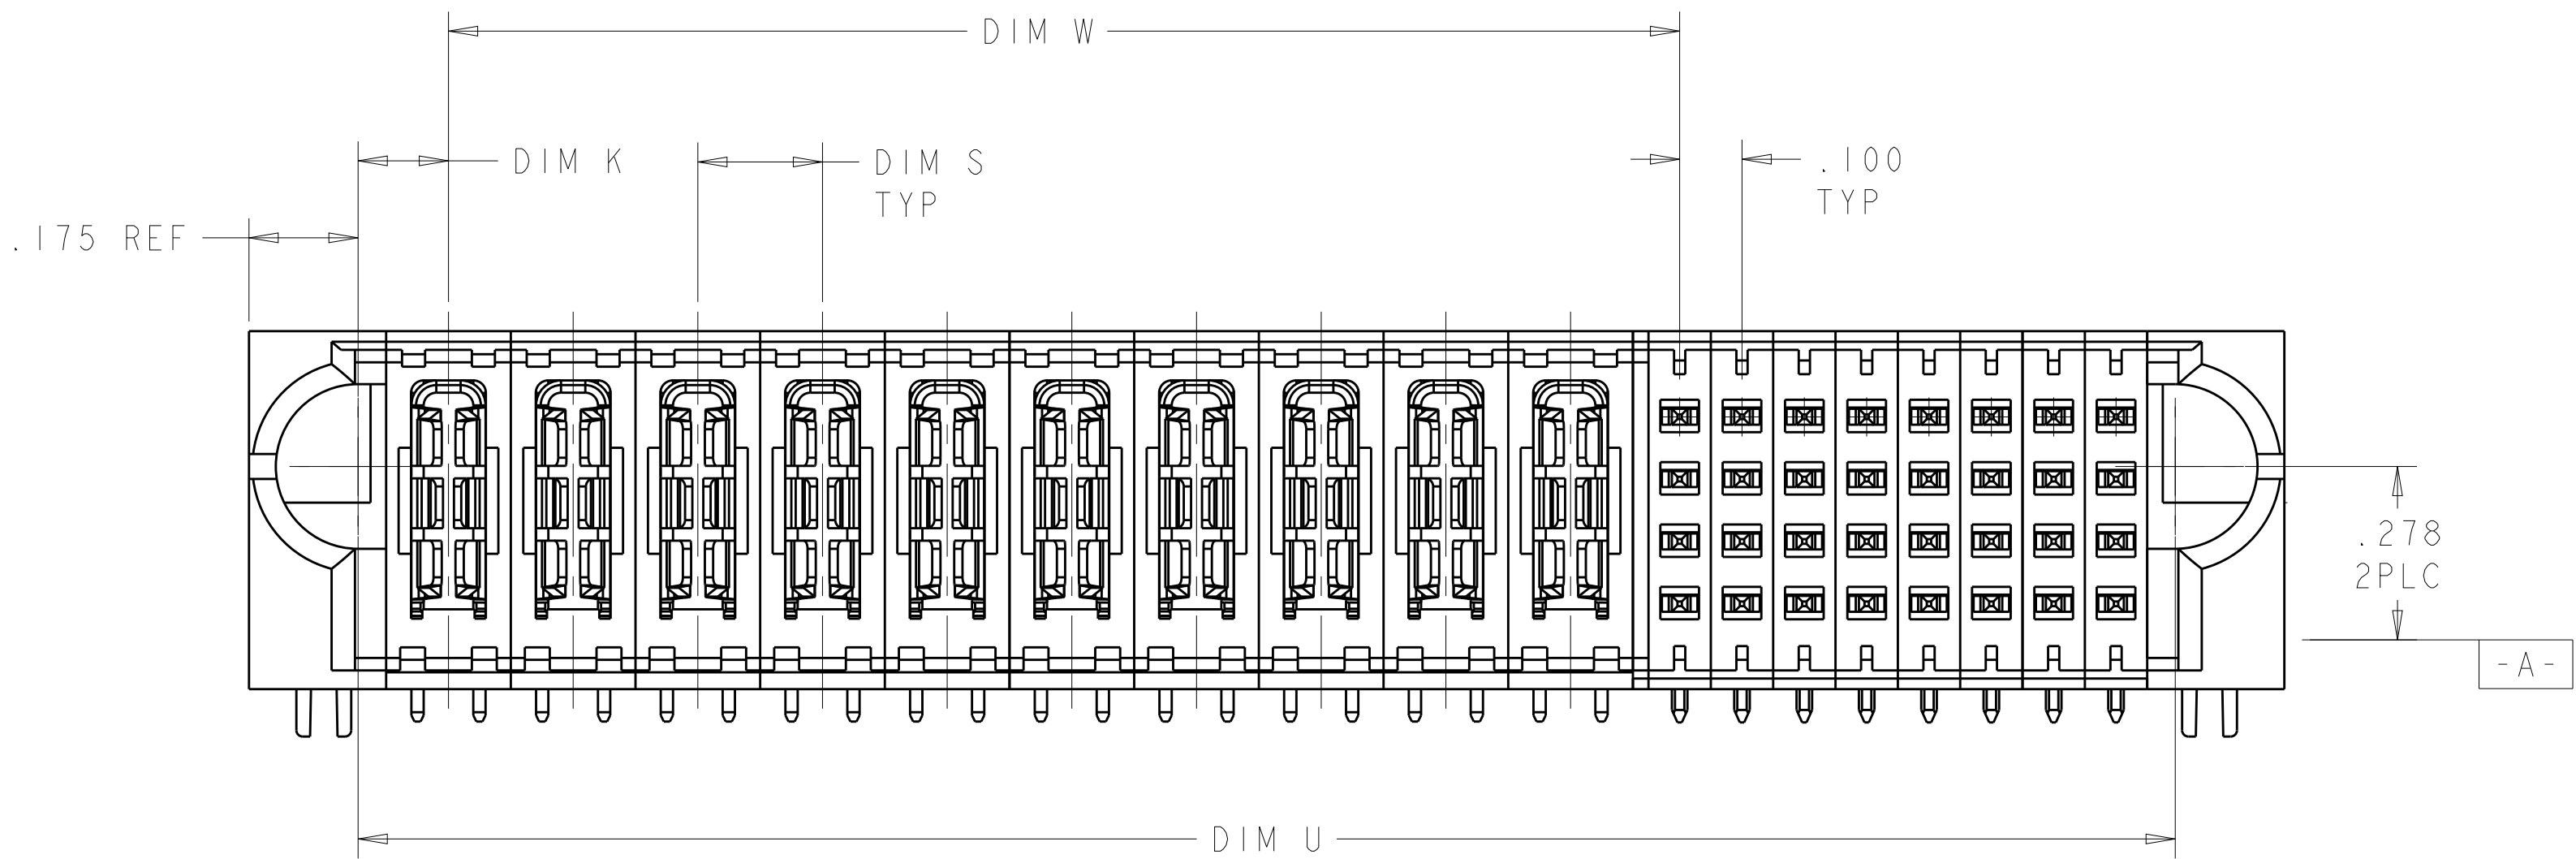

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H. LIU CHK S. ZHAO APVD S. ZHAO	27MAY2008 27MAY2008	TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES FINISH		±" ±.01 ±.005 ±.0020 ±2° 2		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL		WEIGHT		SIZE A100779	
		CUSTOMER DRAWING		CAGE CODE 6450832	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 1 OF 24	
				REV K4	

LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

	5.290	5.150	4.940	5.050	4.050	.195	15P + 28S	4-6450832-7
.200	2.965	2.825	2.615	2.725	1.975	.145	10HDP + 20S	4-6450832-6
	2.090	1.950	1.740	1.850	1.000	.145	5HDP + 24S	4-6450832-5
.200	1.990	1.850	1.640	1.750	.975	.170	5HDP + 20S	4-6450832-4
	3.790	3.650	3.440	3.550	2.625	.170	12P + 24S	4-6450832-3
.250	3.240	3.100	2.890	3.000	1.925	.170	8P + 32S	4-6450832-2
.250	3.240	3.100	2.890	3.000	1.925	.170	8P + 32S	4-6450832-1
.350	1.565	1.325	1.215	1.425	.975	.145	3P + 4S	4-6450832-0
.250	3.040	2.900	2.690	2.800	1.925	.170	8HDP + 24S	3-6450832-9
	2.965	2.825	2.615	2.725	1.825	.195	3ACP + 4P + 24S	3-6450832-8
	5.290	5.150	4.940	5.050	4.050	.195	15P + 28S	3-6450832-6
.200	1.990	1.850	1.640	1.750	.975	.170	5HDP + 20S	3-6450832-5
.250	3.090	2.950	2.740	2.850	1.950	.170	8P + 24S	3-6450832-4
	4.640	4.500	4.290	4.400	2.550	.145	5P + 2HDP + 4P + 64S	3-6450832-3
.200	3.265	3.125	2.915	3.025	2.175	.145	11HDP + 24S	3-6450832-2
.115	.945	.805	.595	.705	.2725	.1025	2LP + 8S	3-6450832-1
.375	2.240	2.100	1.890	2.000	1.500	.170	4ACP + 8S	3-6450832-0
.200	3.265	3.125	2.915	3.025	2.175	.145	11HDP + 24S	2-6450832-8
.200	3.065	2.925	2.715	2.825	1.975	.145	10HDP + 24S	2-6450832-7
.200	2.240	2.100	1.890	2.000	1.150	.145	6HDP + 24S	2-6450832-6
	2.420	2.280	2.070	2.180	1.330	.145	5P + 2LP + 24S	2-6450832-5
	3.065	2.925	2.715	2.825	1.525	.195	4P + 40S	2-6450832-4
	4.015	3.875	3.665	3.775	3.075	.195	3ACP + 9P + 16S	2-6450832-3
.250	2.415	2.275	2.065	2.175	1.425	.145	6P + 20S	2-6450832-2
	2.420	2.280	2.070	2.180	1.330	.145	5P + 2LP + 24S	2-6450832-0
.250	3.790	3.650	3.440	3.550	2.675	.170	11P + 24S	1-6450832-9
	3.740	3.600	3.390	3.500	2.625	.170	3ACP + 8P + 24S	1-6450832-7
	3.790	3.650	3.440	3.550	2.700	.145	13P + 24S	1-6450832-6
.250	1.490	1.350	1.140	1.250	.675	.170	3P + 12S	1-6450832-4
.250	1.565	1.425	1.215	1.325	.425	.170	2P + 24S	1-6450832-2
.250	3.790	3.650	3.440	3.550	2.900	.145	12P + 16S	1-6450832-0
	1.590	1.450	1.240	1.350	.650	.170	2P + 8S	6450832-9
.115	.970	.830	.620	.730	.2725	.1275	2LP + 8S	6450832-8
	3.740	3.600	3.390	3.500	2.625	.170	3ACP + 8P + 24S	6450832-7
.200	3.065	2.925	2.715	2.825	1.975	.145	10HDP + 24S	6450832-5
.200	3.065	2.925	2.715	2.825	1.975	.145	10HDP + 24S	6450832-4
.250	2.565	2.425	2.215	2.325	1.425	.170	6P +24S	6450832-3
	2.575	2.435	2.225	2.335	1.460	.170	4P + 4LP + 24S	6450832-2
.200	3.265	3.125	2.915	3.025	1.975	.145	10HDP + 32S	6450832-1
DIM S	DIM L	DIM V	DIM U	DIM D	DIM W	DIM K	DESCRIPTION	PART NUMBER

Ⓜ VIEW IN SHEET 6

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN H. LIU 27MAY2008
CHK S. ZHAO 27MAY2008
APVD S. ZHAO -

PRODUCT SPEC 108-2292
APPLICATION SPEC 114-13251
WEIGHT -

CUSTOMER DRAWING


NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE A1
CAGE CODE 00779
DRAWING NO. 6450832


RESTRICTED TO -

SCALE 4:1
SHEET 2 OF 24
REV K4

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

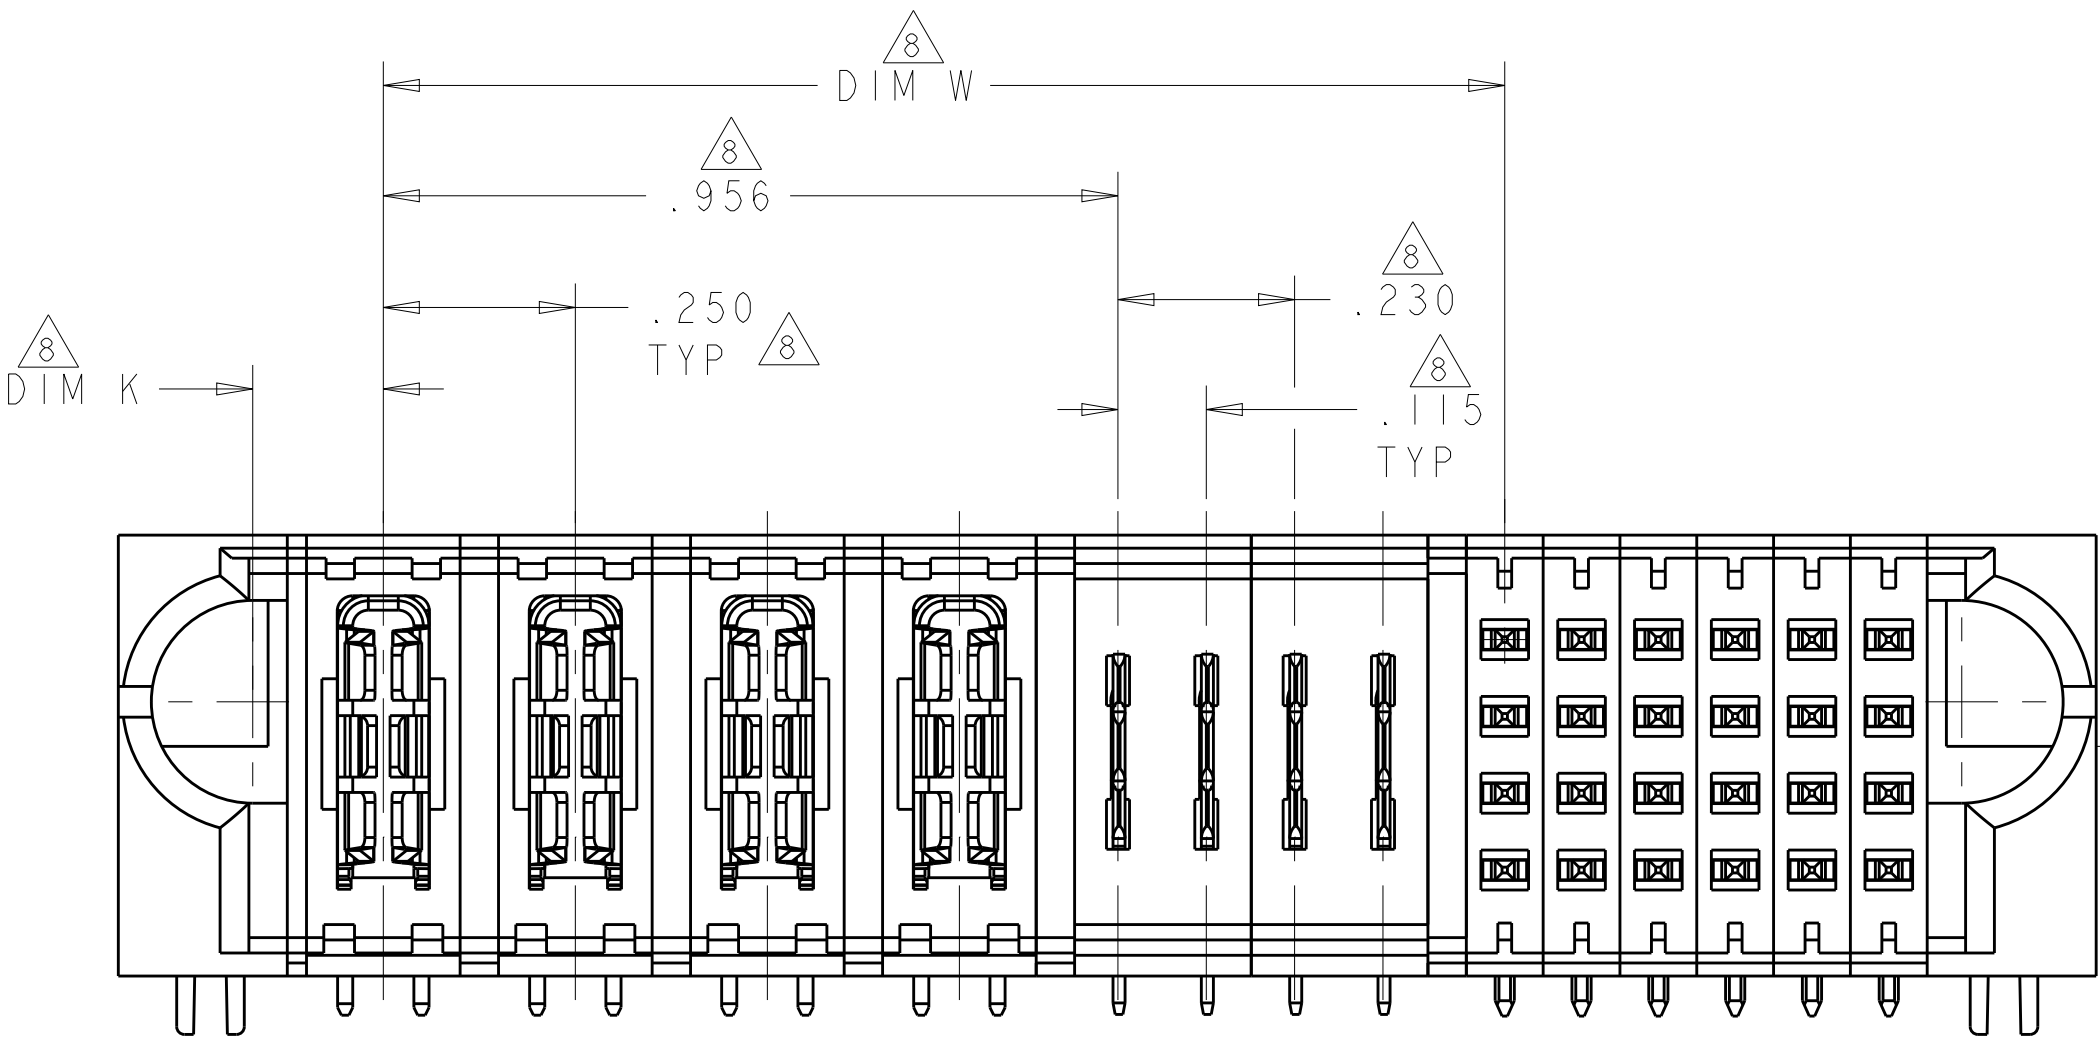

FOR P/N:6450832-2, OTHER DIMENSIONS PLEASE SEE TABLE

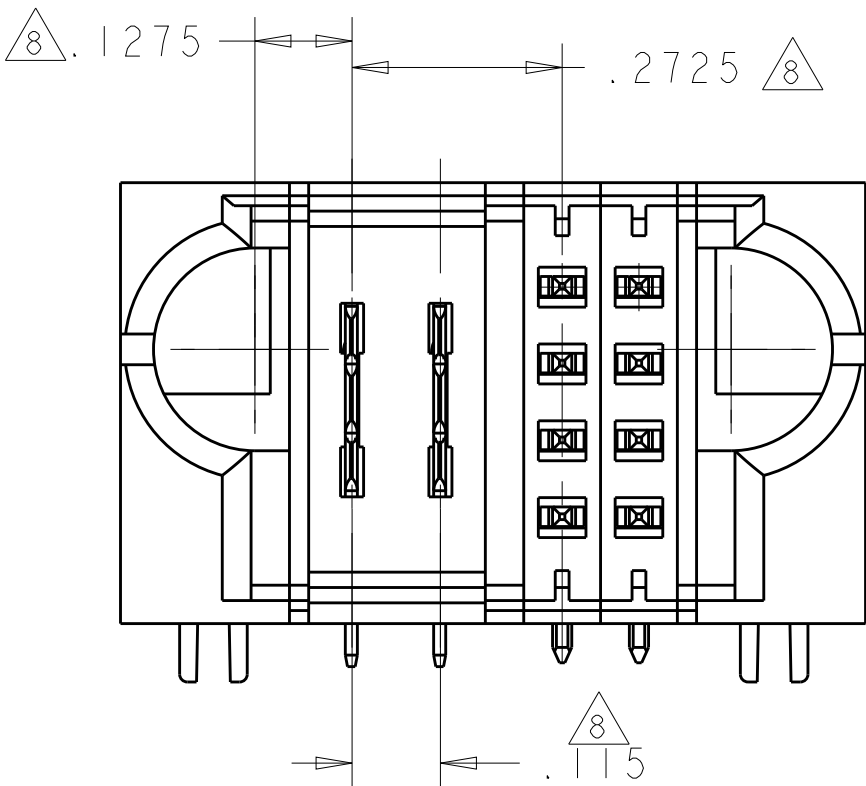

FOR P/N:6450832-8 AND 3-6450832-1, OTHER DIMENSIONS PLEASE SEE SHEET 1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
H. LIU
27MAY2008

CHK
S. ZHAO
27MAY2008

APVD
S. ZHAO
-

DIMENSIONS:
INCHES

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
±2°

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

MATERIAL

CUSTOMER DRAWING

NAME
R/A HEADER WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450832

RESTRICTED TO
-

SCALE
4:1

SHEET
3


OF
24


REV
K4

TE Connectivity

4805 (3/11)

HOLD DOWN	HD
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	E
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	F
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	G
MLBF SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	H
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	FJ
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	FK
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	FN
MFBL SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	FS
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW D	J
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW C	K
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW B	N
STANDARD SIGNAL CONTACT, .135 TAIL LENGTH, ROW A	S
MFBL LOWER POWER CONTACT.135 TAIL LENGTH.	LMF
STD LOWER POWER CONTACT .135 TAIL LENGTH	LM
3-BEAM POWER CONTACT, .135 TAIL LENGTH	TM
DESCRIPTION	IDENTIFIER

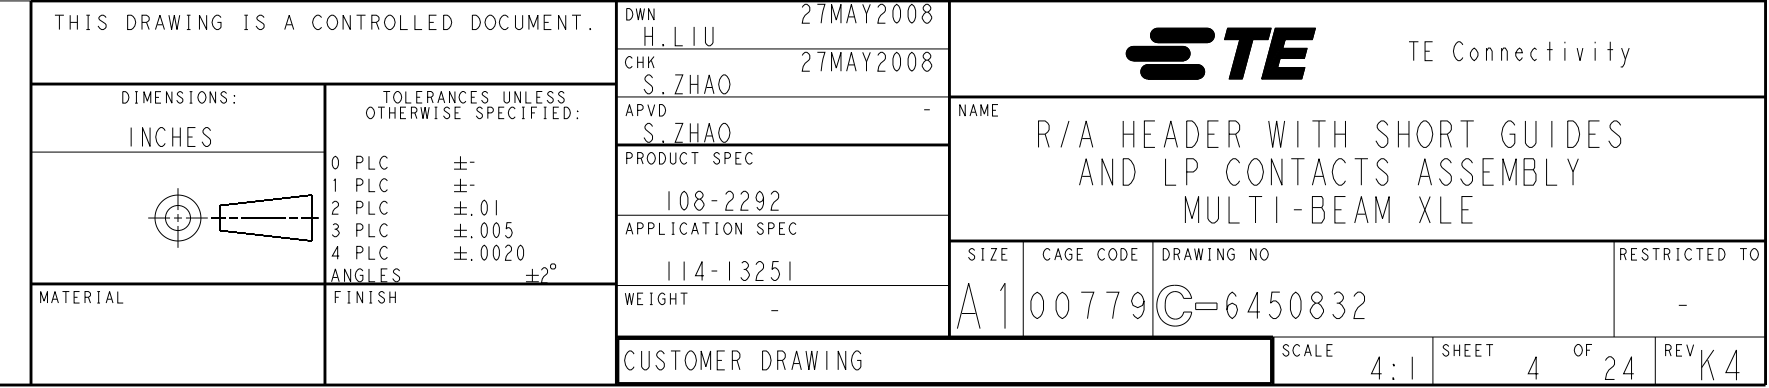

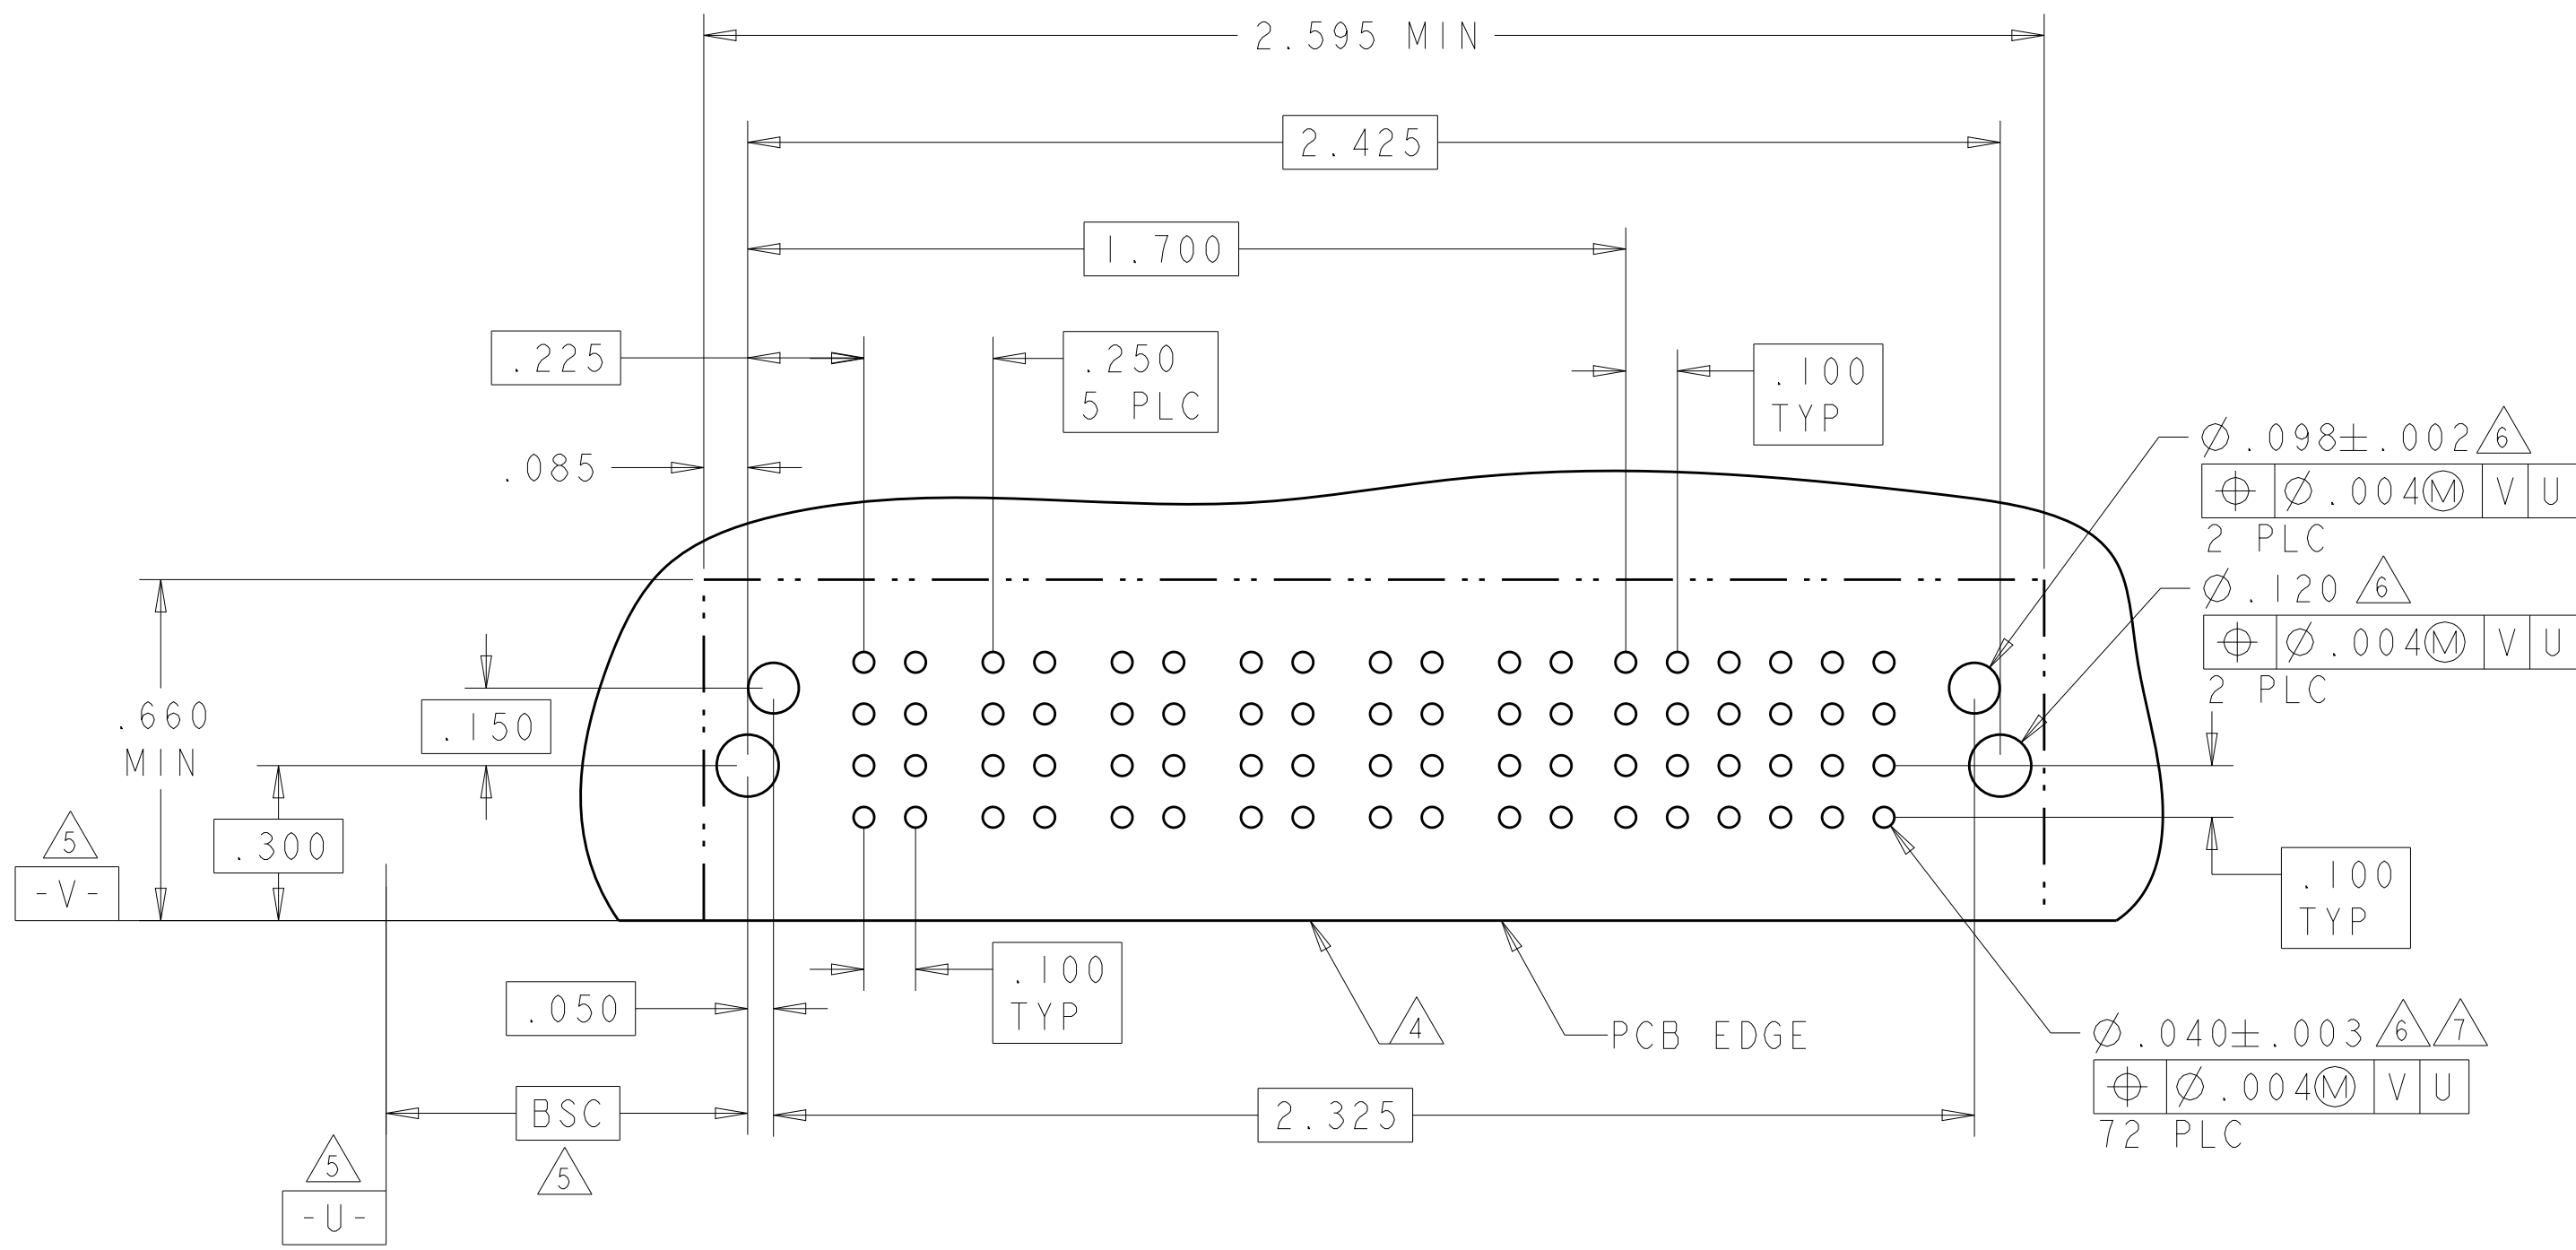
[illegible]4805 (3/11)

LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	


PART NUMBER	ROWS		POWER										SIGNAL							
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6		
6450832-4	D C B A		HD	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	
																K	K	K	K	K
																N	N	N	N	N
10HDP + 24S																			HD	

PART NUMBER	ROWS		POWER										SIGNAL							
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6		
6450832-5	D C B A		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J
															K	K	K	K	K	K
															N	N	N	N	N	N
10HDP + 24S															H	S	S	S	S	

PART NUMBER	ROWS		POWER										SIGNAL							
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	6		
2-6450832-7	D C B A		TM		TM		TM		TM	TM	TM	TM	TM	K	J	J	J	J	J	J
10HDP + 24S																				

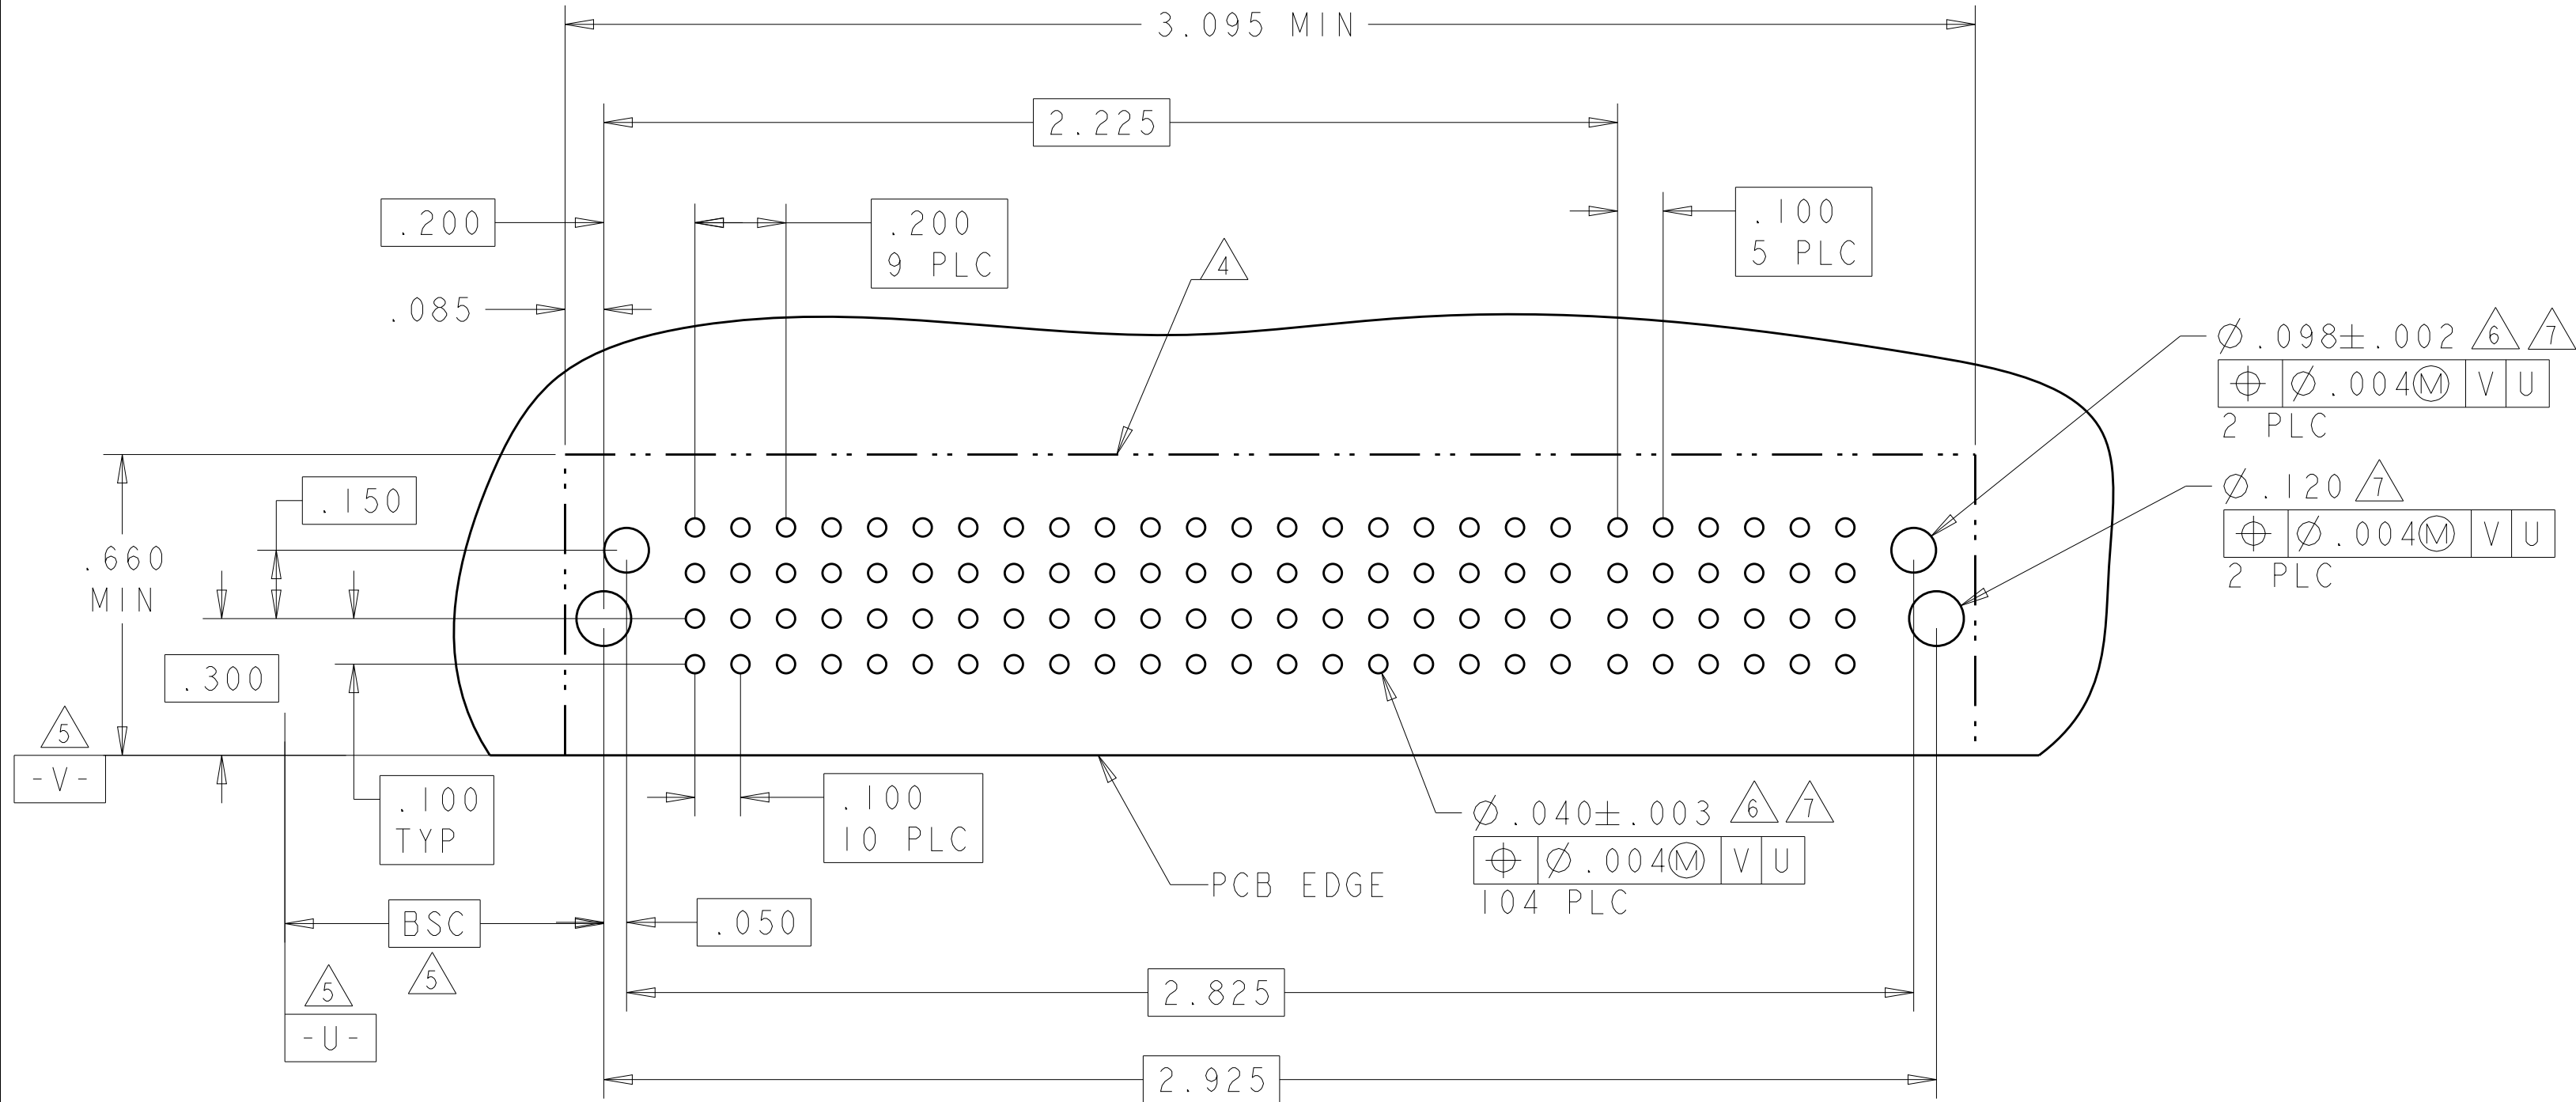


(H)

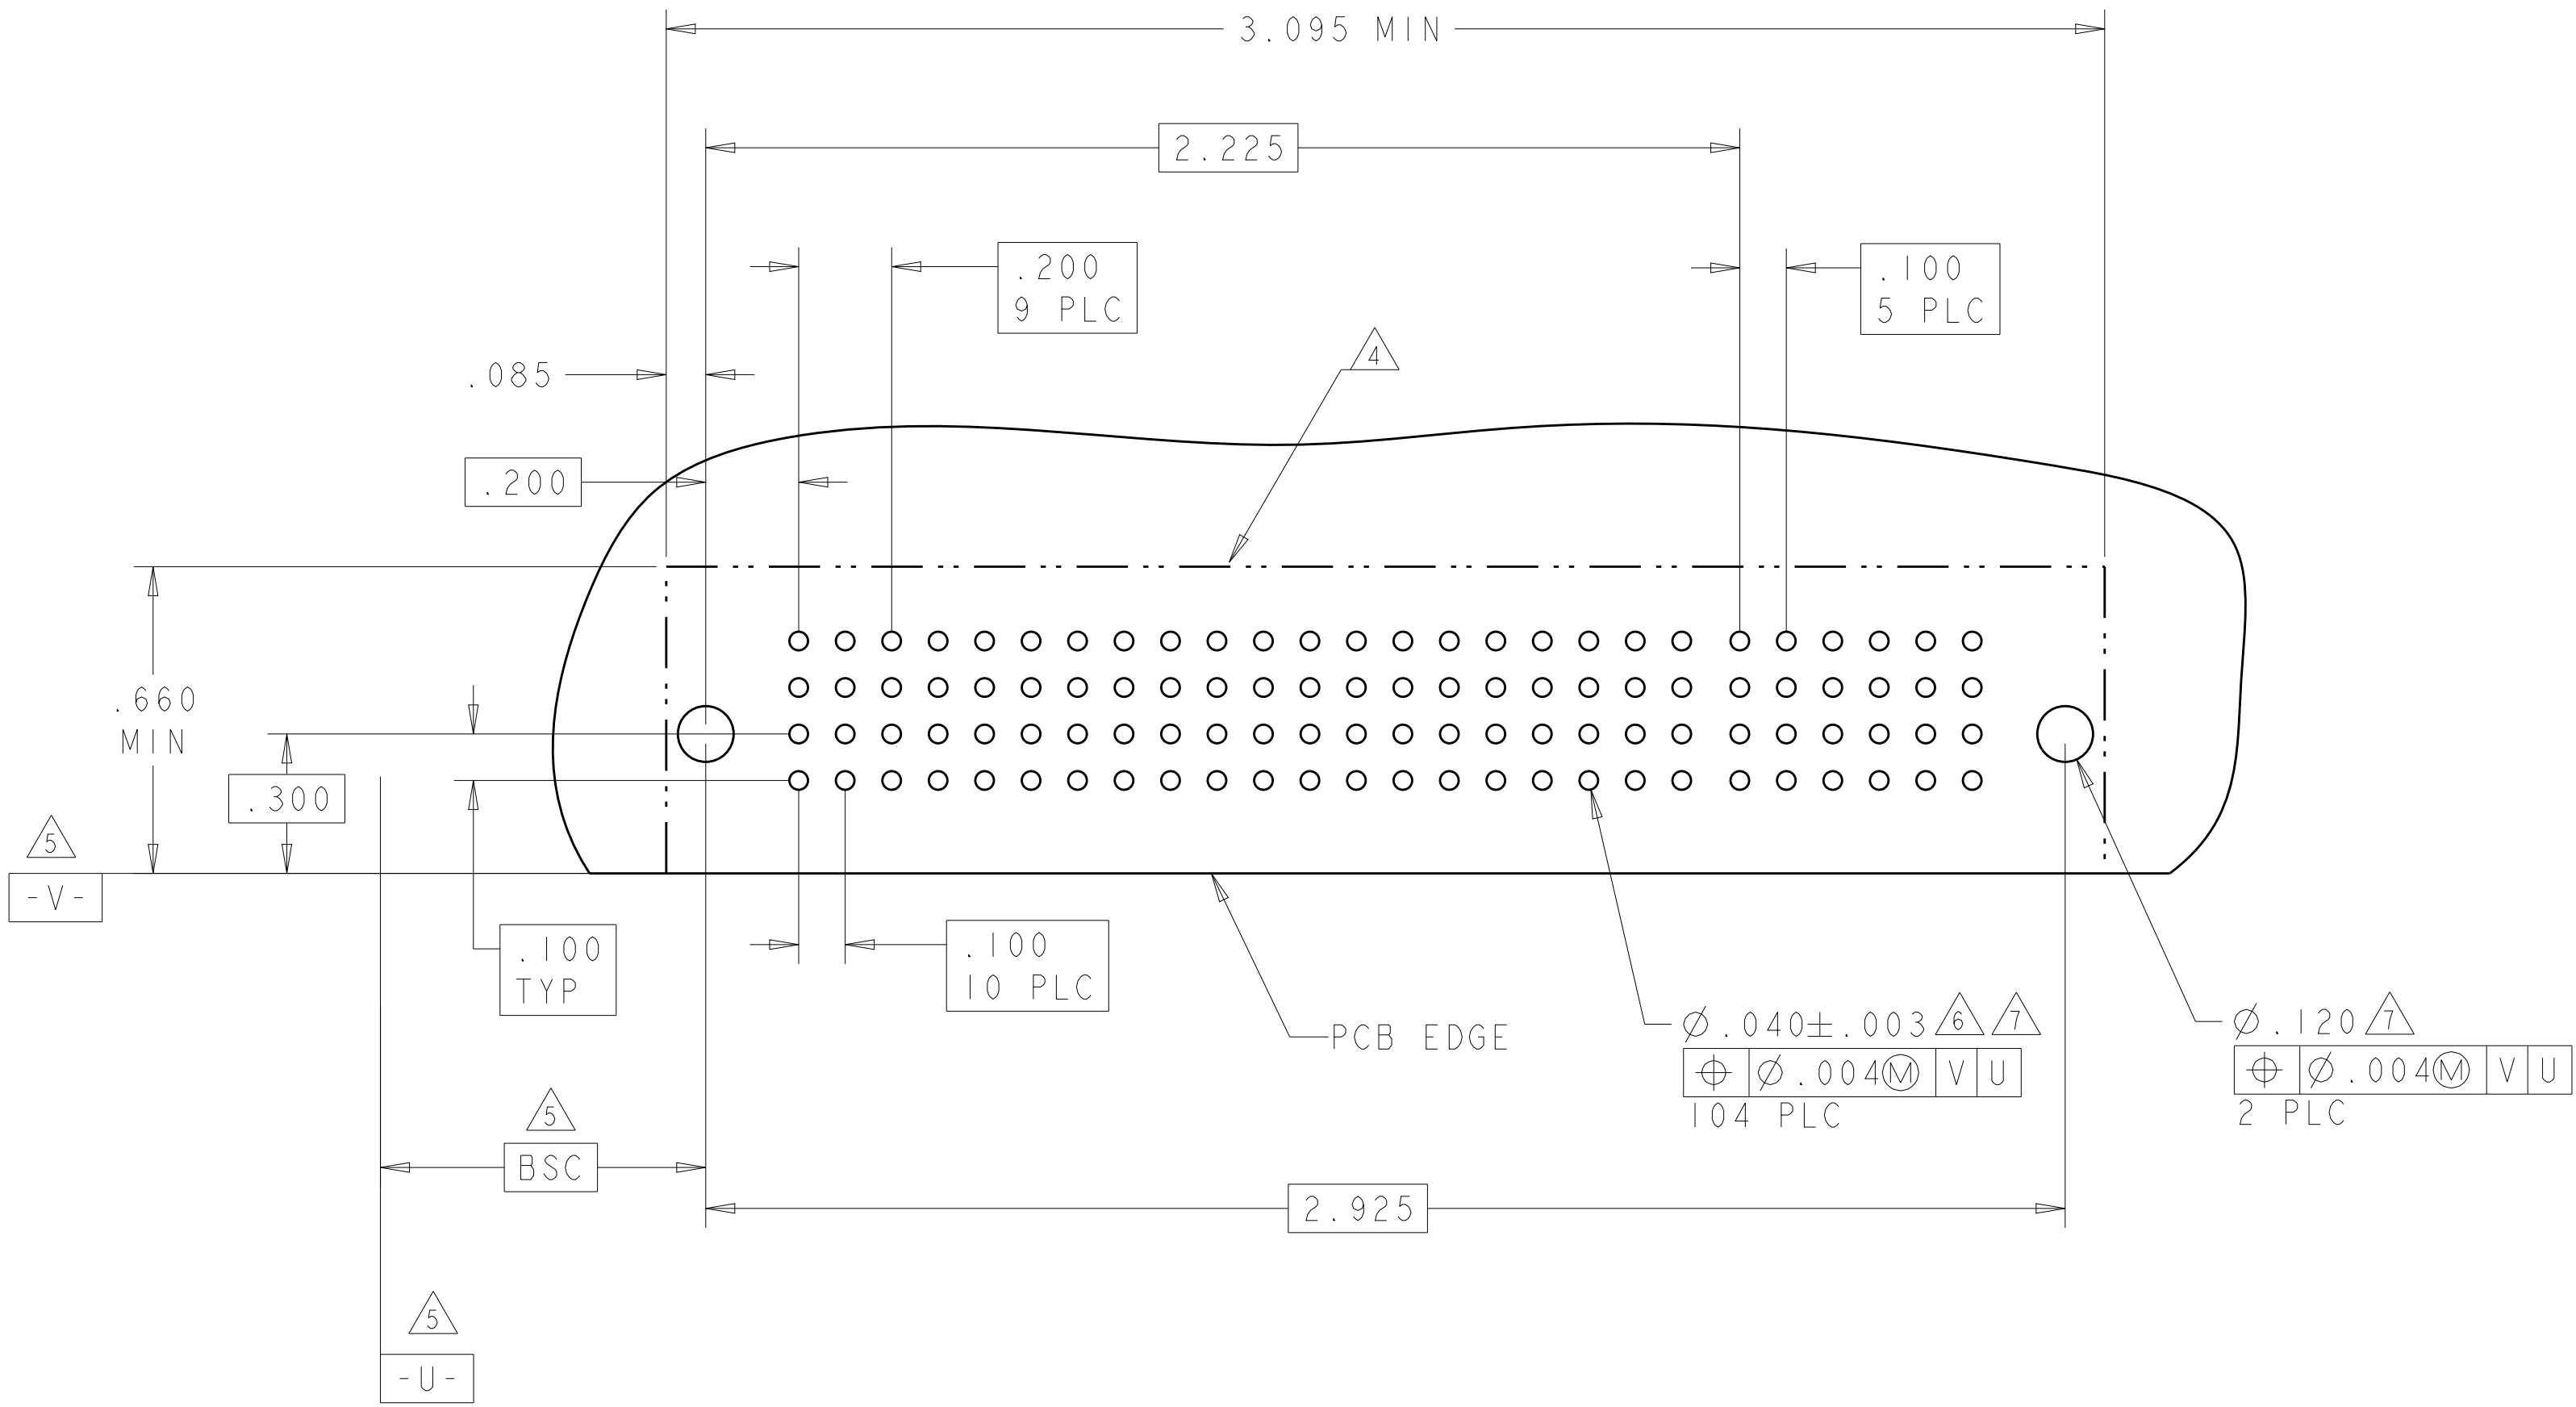


PCB LAYOUT FOR P/N: 6450832-5 AND 2-6450832-7


THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	H.LIU	27MAY2008	 TE Connectivity								
				CHK	S.ZHAO	27MAY2008									
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	S.ZHAO	NAME		R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE							
INCHES				PRODUCT SPEC											
		0 PLC ±.01		108-2292											
		1 PLC ±.01		APPLICATION SPEC											
		2 PLC ±.005		114-13251											
		3 PLC ±.0020		WEIGHT											
4 PLC ±.0020		ANGLES ±°		FINISH		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL						A1		00779		C=6450832		-			
CUSTOMER DRAWING						SCALE		4:1		SHEET		6 OF 24		REV K4	

PART NUMBER	ROWS		POWER		SIGNAL									
			P1	P2	I	2								
6450832-8	D C B A		LMF	LM	<table><tr><td>E</td><td>E</td></tr><tr><td>F</td><td>F</td></tr><tr><td>G</td><td>G</td></tr><tr><td>H</td><td>H</td></tr></table>	E	E	F	F	G	G	H	H	
E	E													
F	F													
G	G													
H	H													
2LP + 8S														

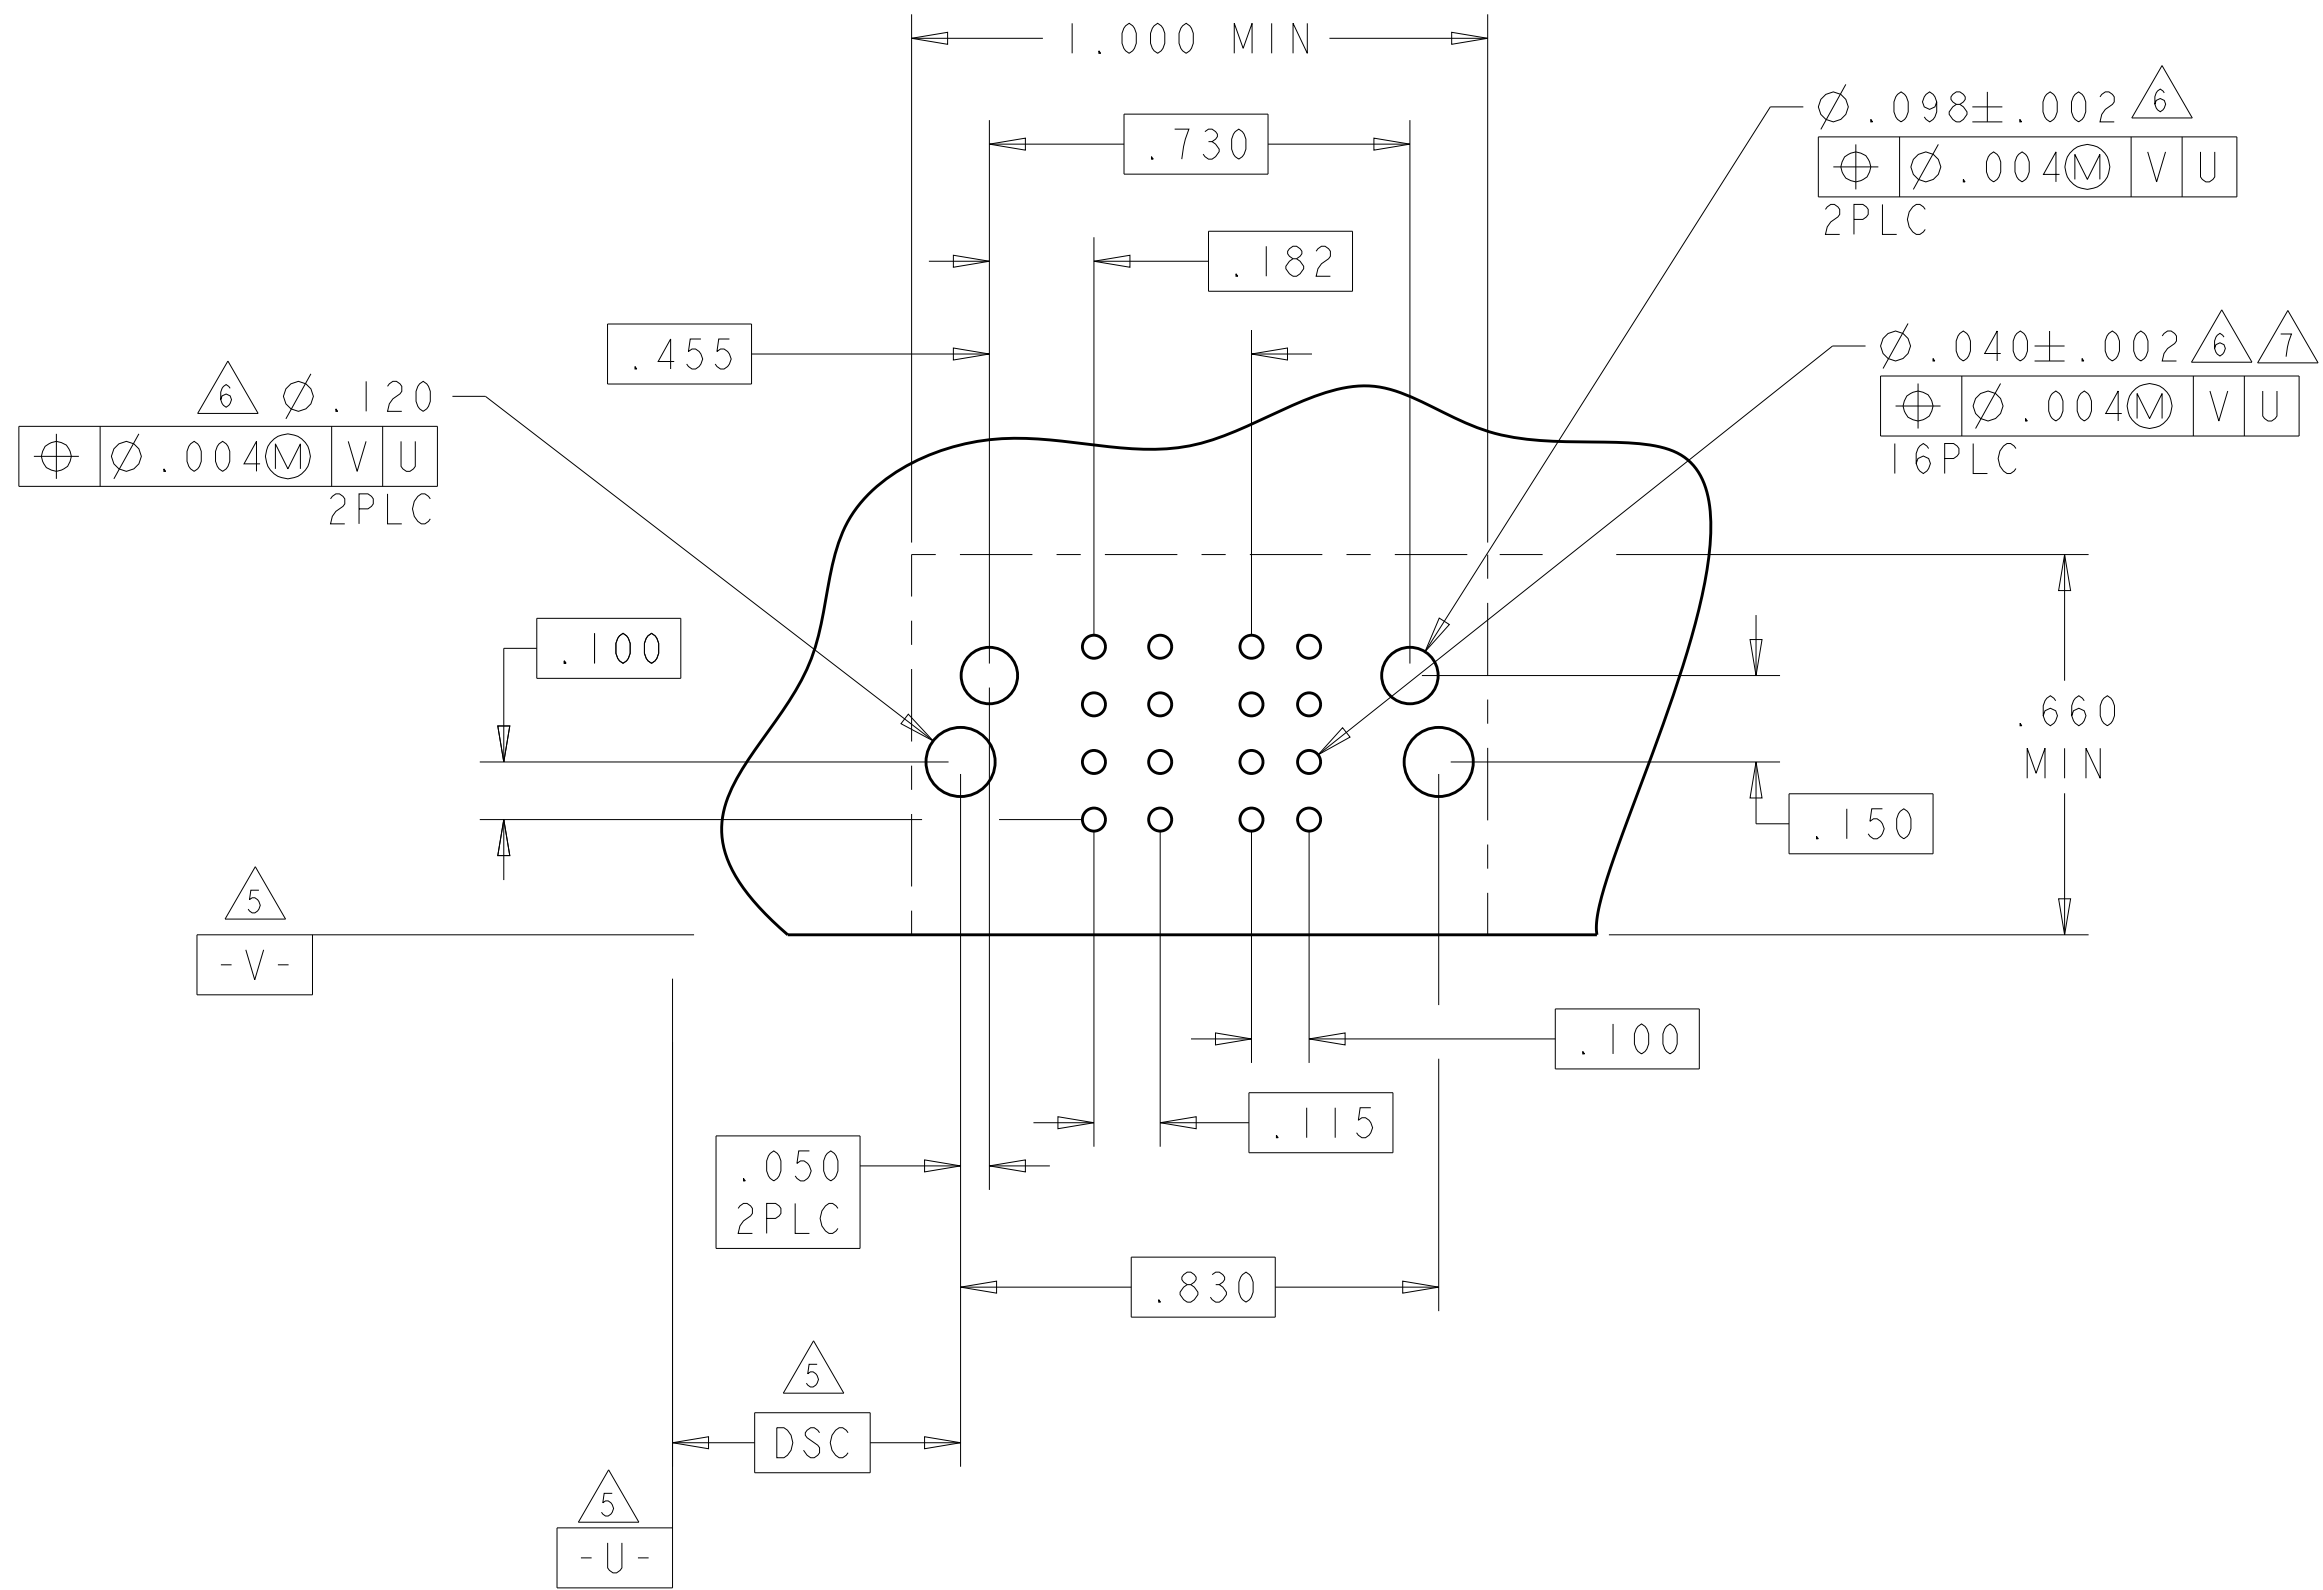
4805 (3/11)


PART NUMBER	ROWS		POWER								SIGNAL						
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	
3-6450832-4	D		TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	
	K										K	K	K	K	K		
	N										N	N	N	N	N		
	S										S	S	S	S	S		
8P + 24S																	


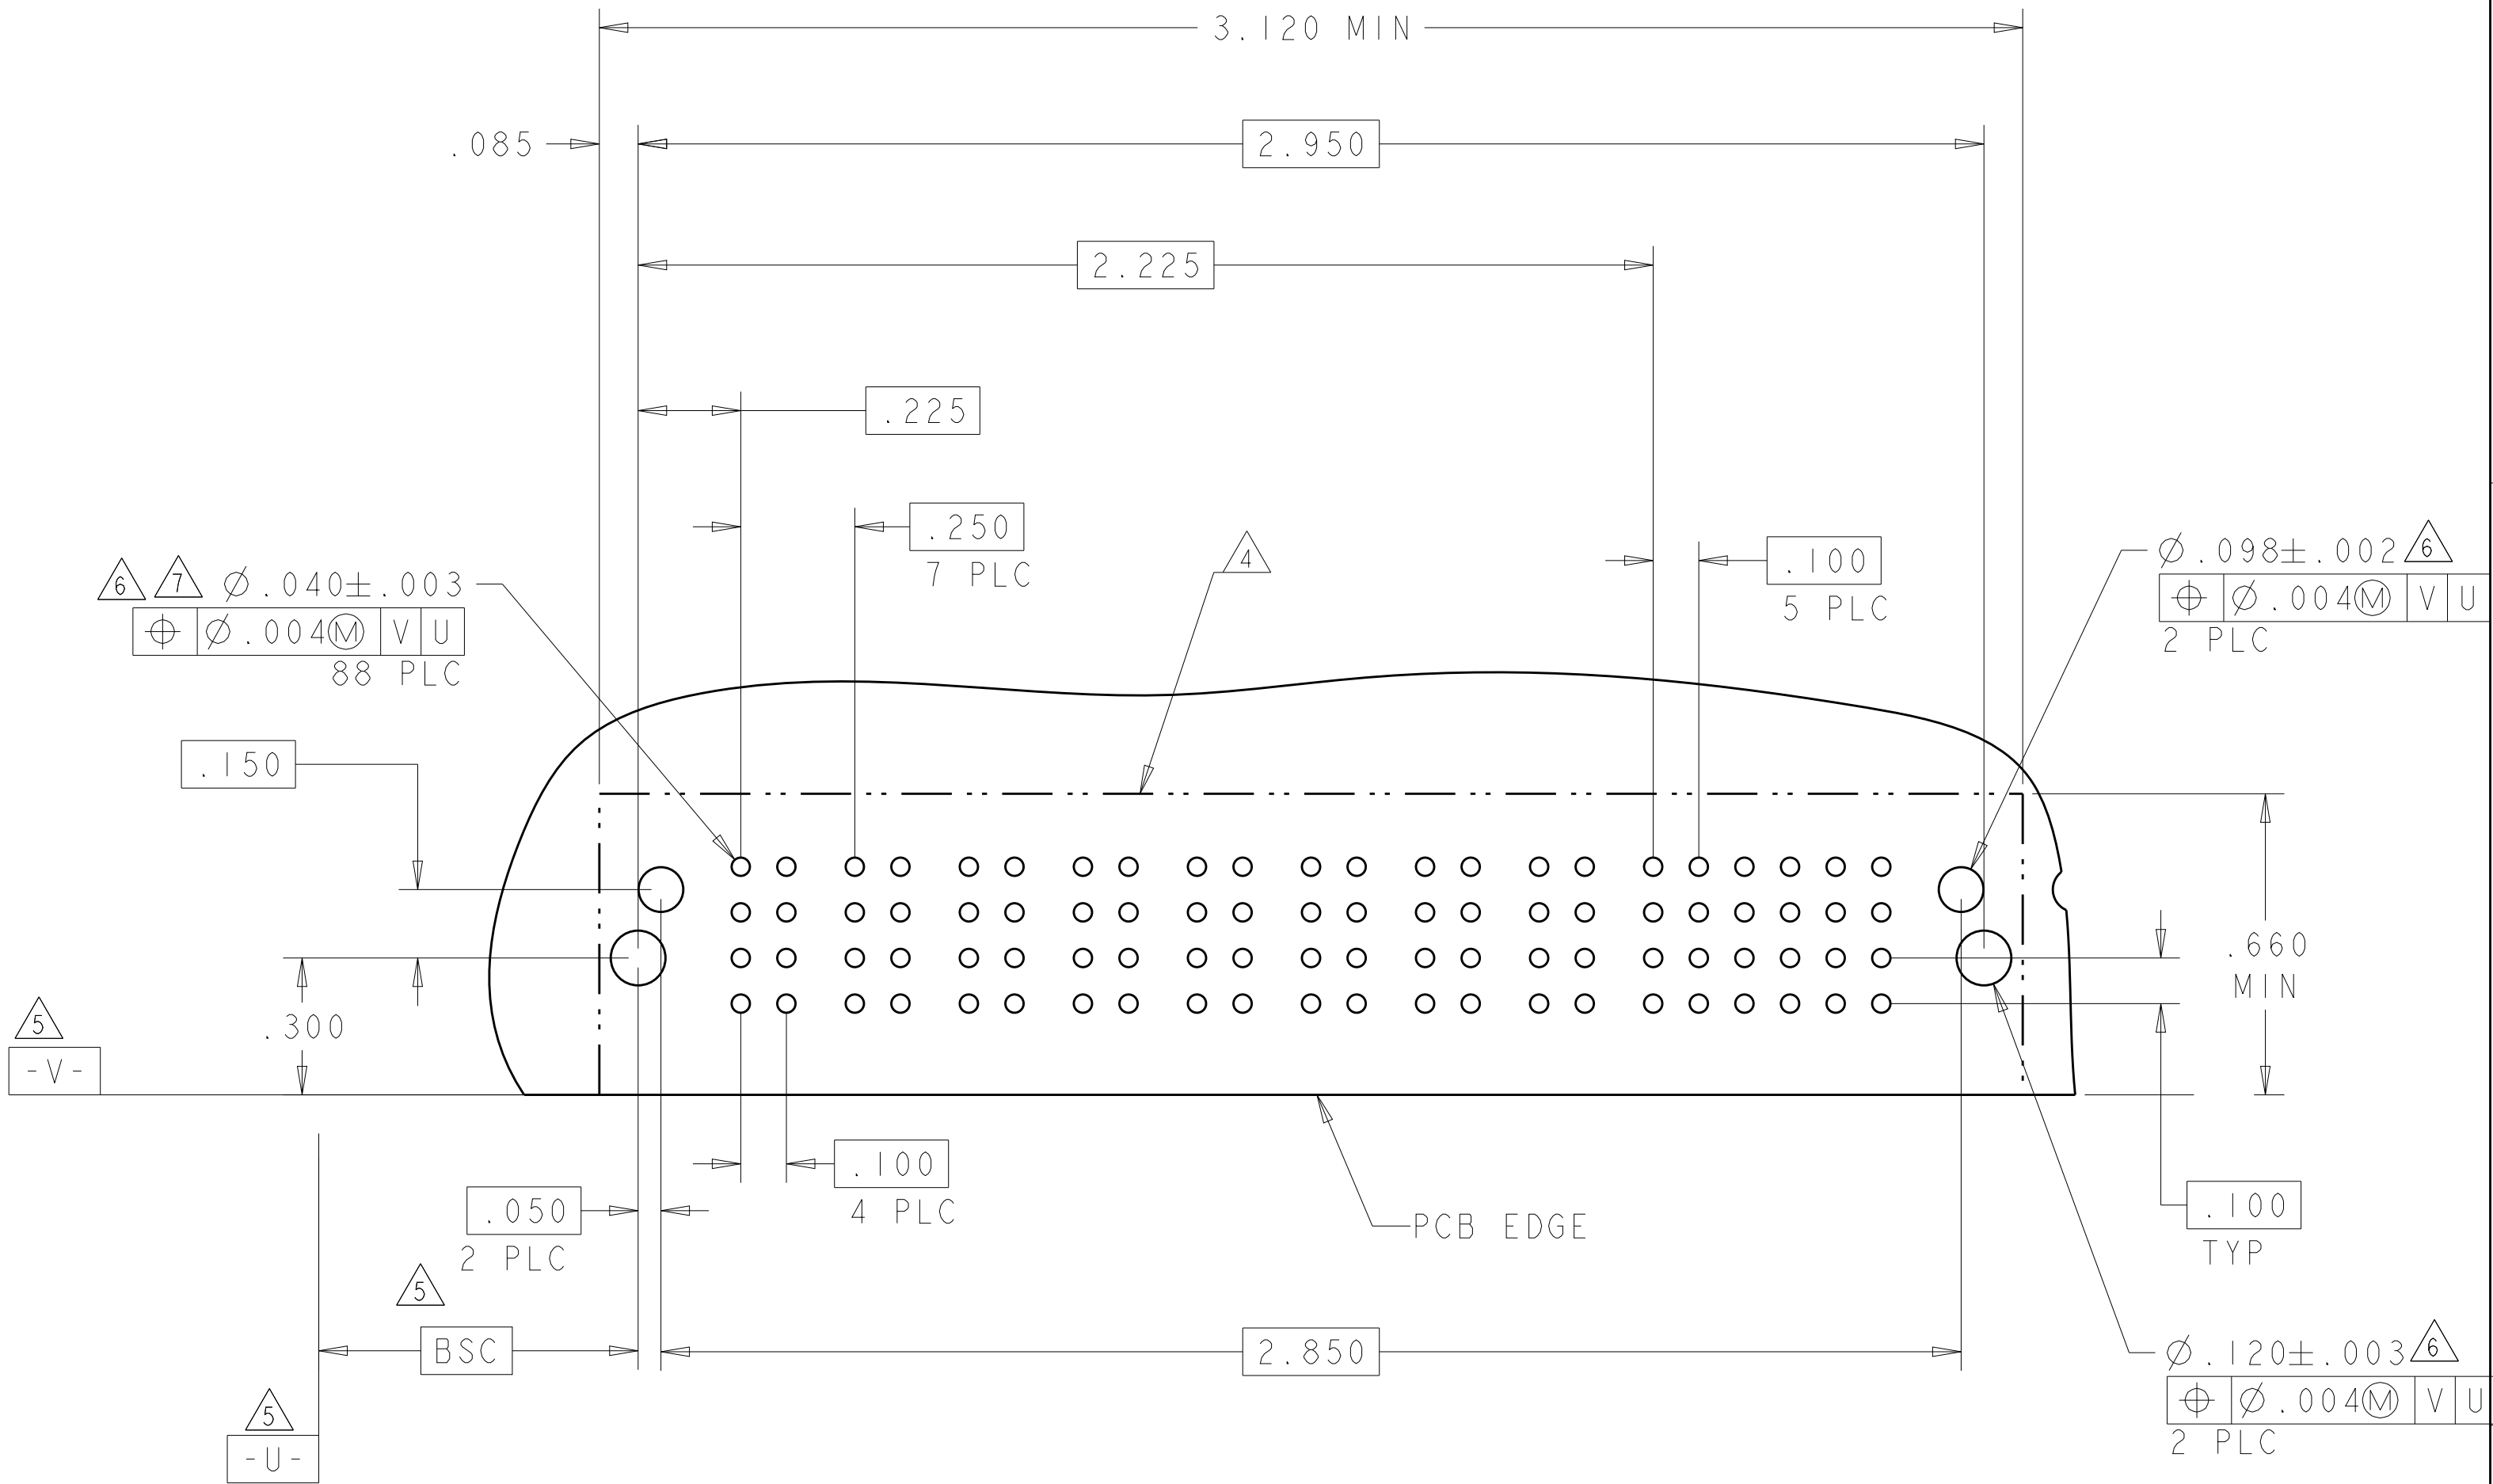
4805 (3/11)

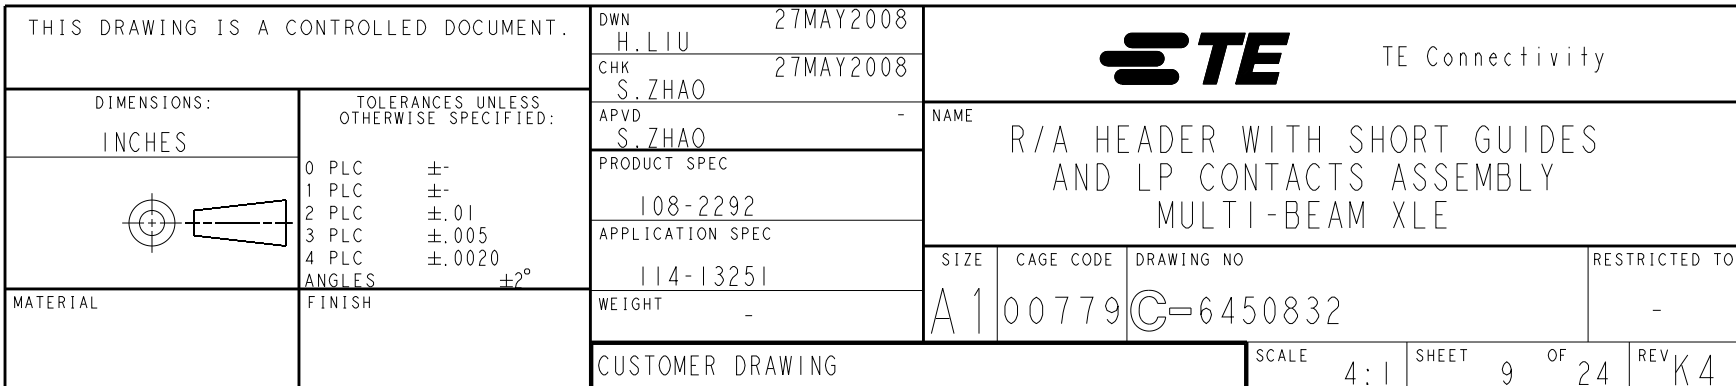


Technical drawing of a 16-channel rackmount device. The drawing shows a top-down view of the device with dimensions. The overall width is 170 units. The distance between the two main vertical sections is 425 units. The distance between the two main vertical sections is 250 units. The device has 16 channels, each with a 15W power rating. The channels are arranged in two rows of eight. The device is shown with mounting ears on the sides and bottom.


PART NUMBER	ROWS		POWER			SIGNAL			
			P1	P2	P3	1	2	3	
1-6450832-4	D					J	J	J	
	C					K	F	K	
	B					N	G	N	
	A					S	S	S	
3P + 12S									

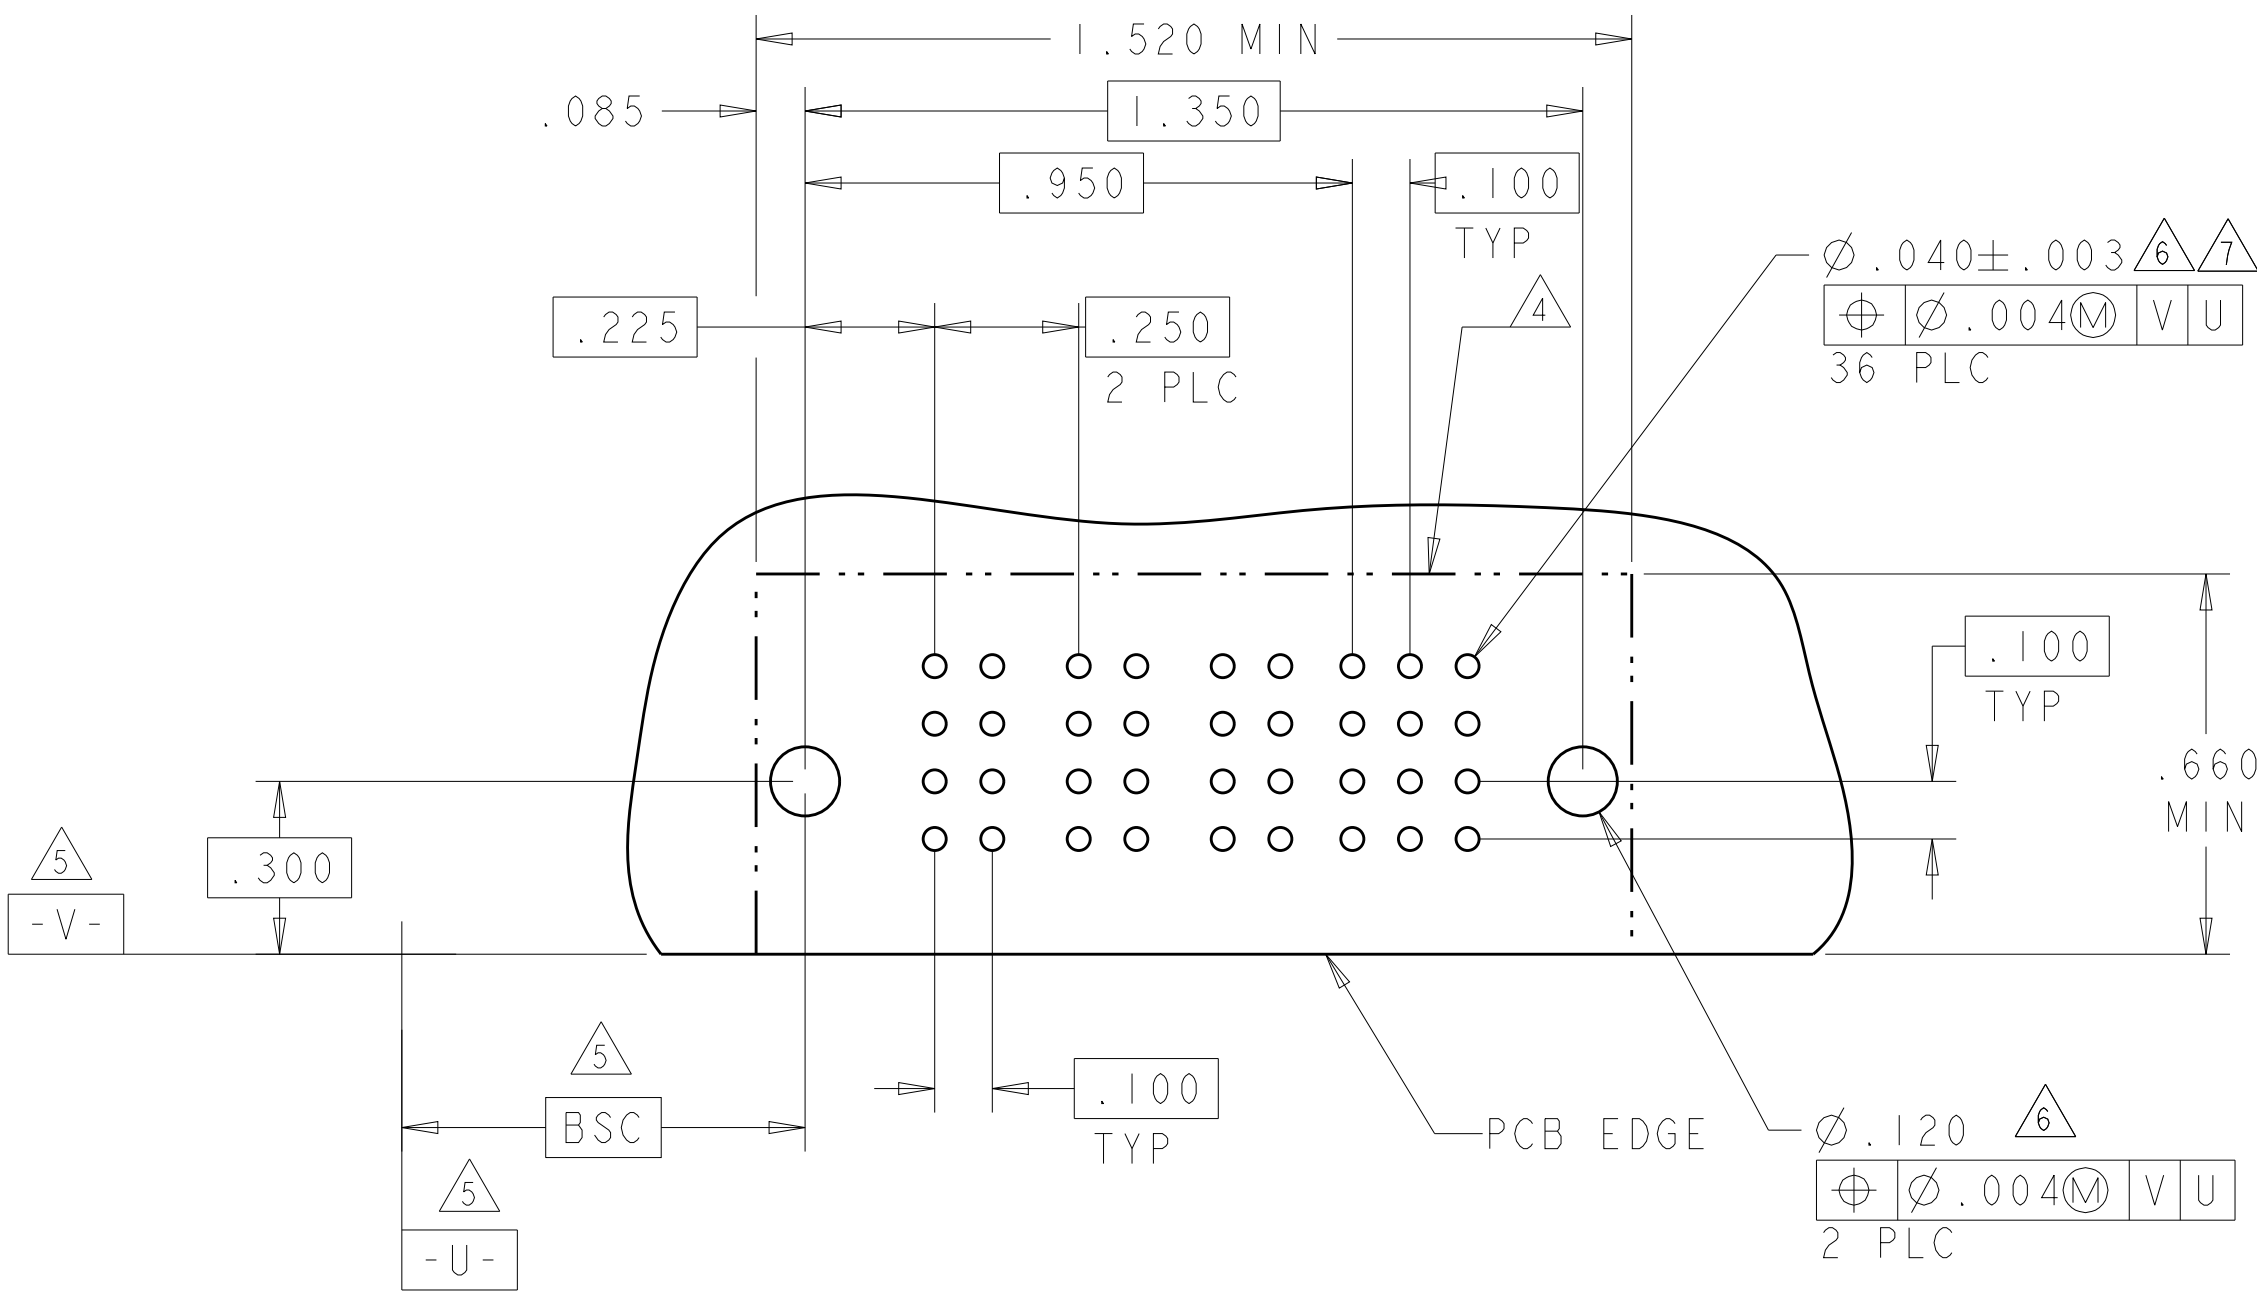4805 (3/11)

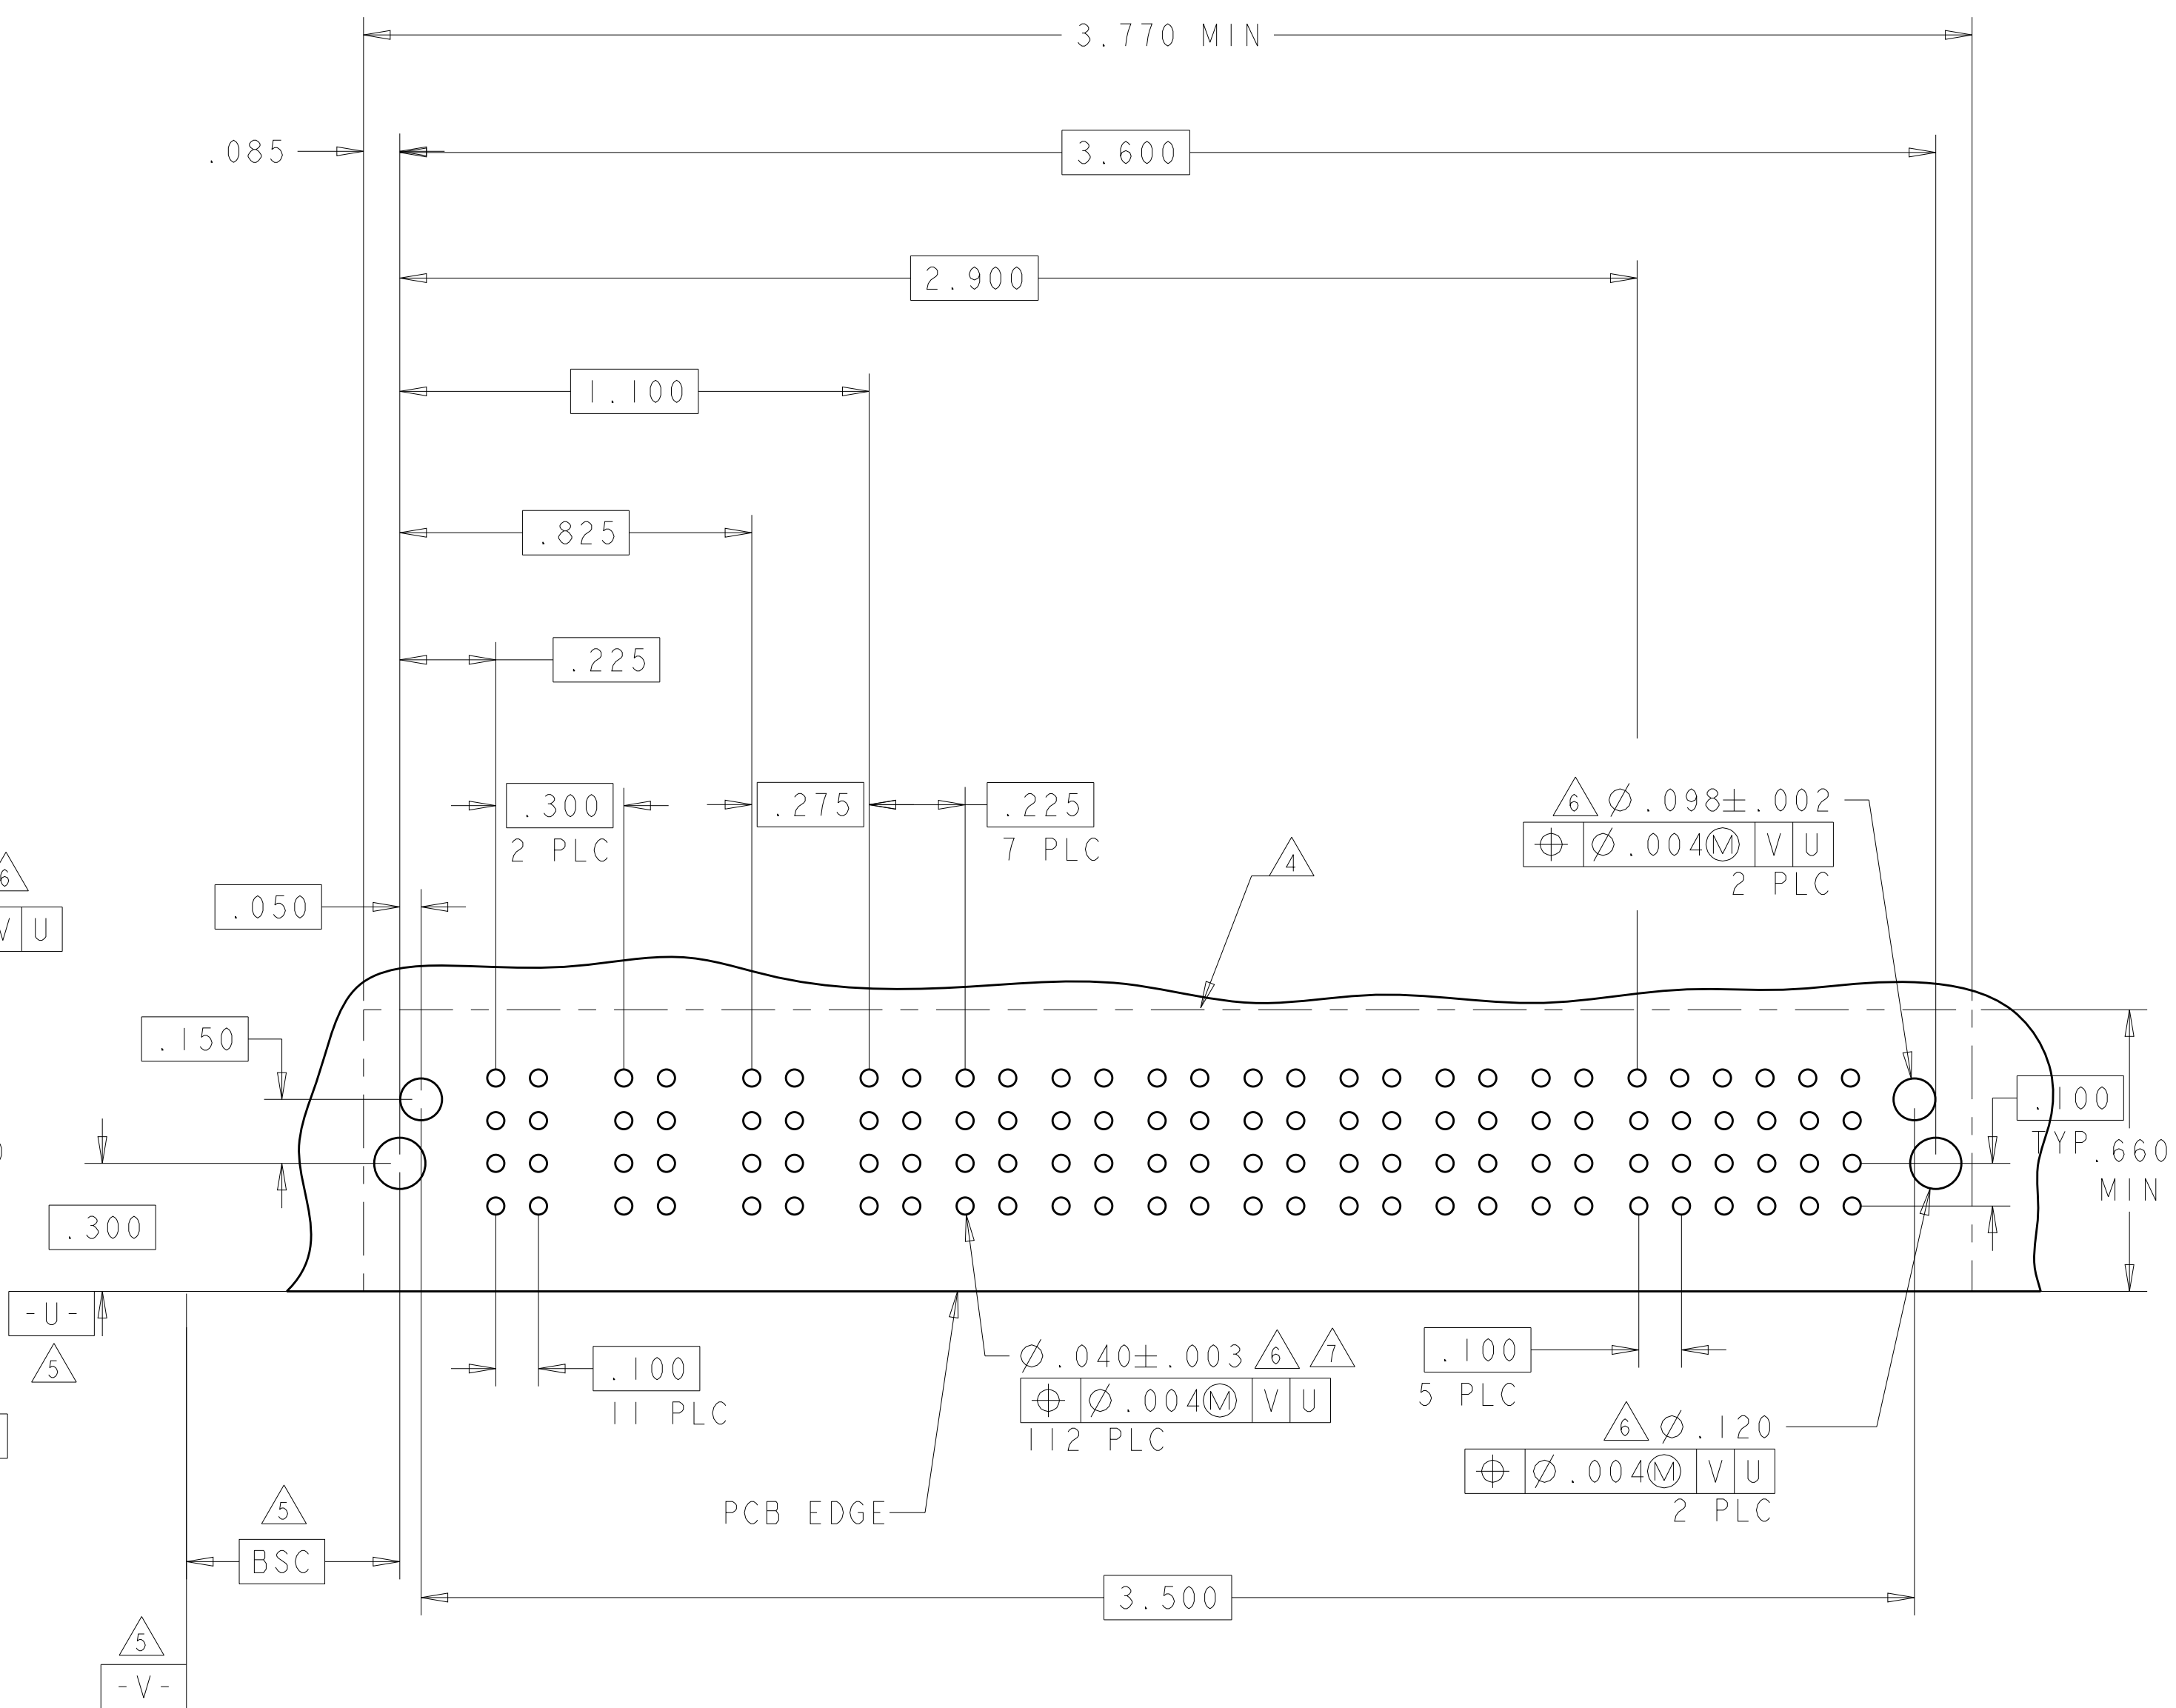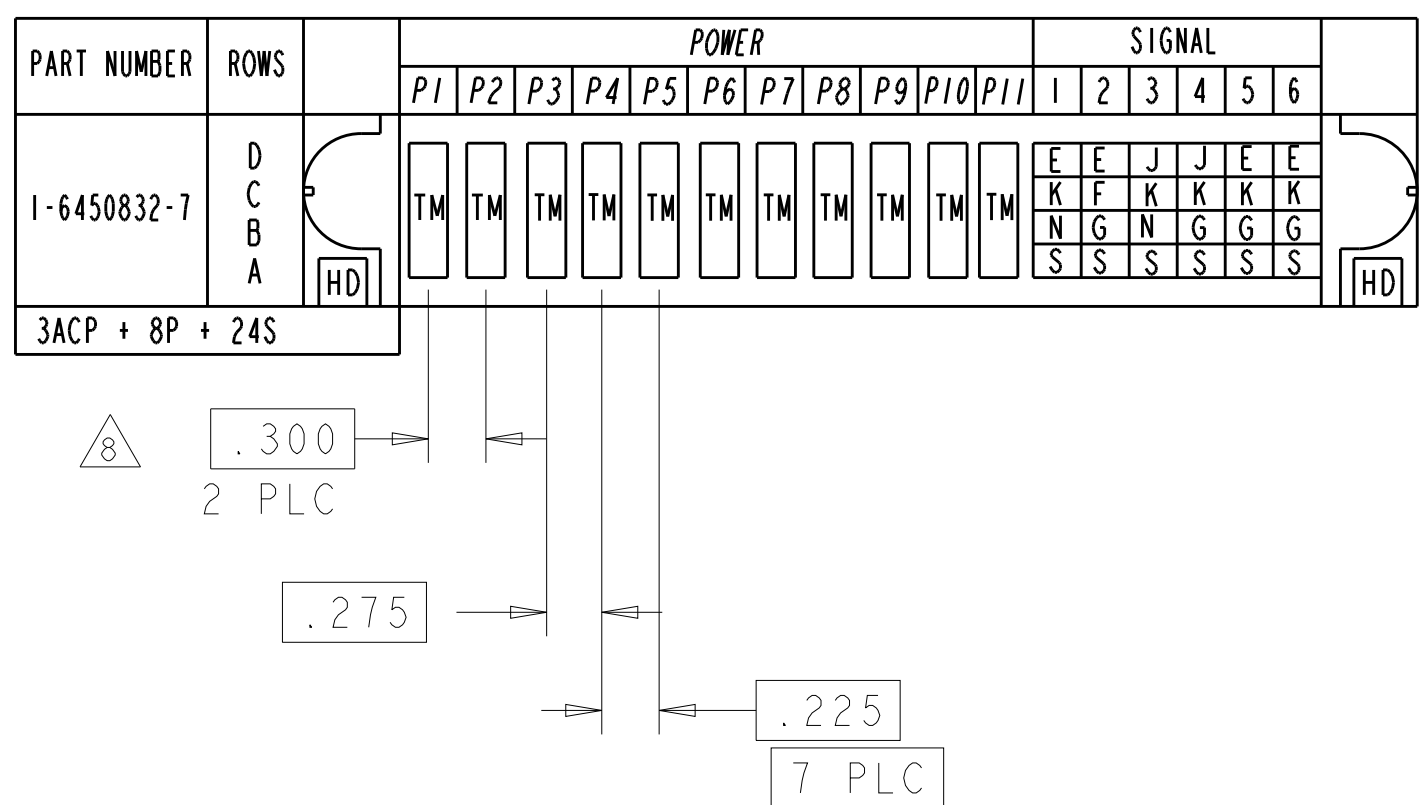4805 (3/11)


PART NUMBER	ROWS		POWER								SIGNAL						
			P1	P2	P3	P4	P5	LP1	LP2	1	2	3	4	5	6		
2-6450832-0	D C B A		TM	TM	TM	TM	TM	LM	LMF	J	FJ	J	J	J	J		
										K	FK	K	K	F	F		
										N	FN	N	N	FN	FN		
										S	FS	H	S	H	H		
5P + 2LP + 24S			     														
			     														
			     														
			     														


PART NUMBER	ROWS		POWER								SIGNAL						
			P1	P2	P3	P4	P5	LP1	LP2	1	2	3	4	5	6		
2-6450832-5	D		TM	TM	TM	TM	TM	LMF	LMF	J	FJ	J	J	J	J		
	K									FK	K	K	F	F			
	N									FN	N	N	FN	FN			
	S									FS	H	S	H	H			
5P + 2LP + 24S																	

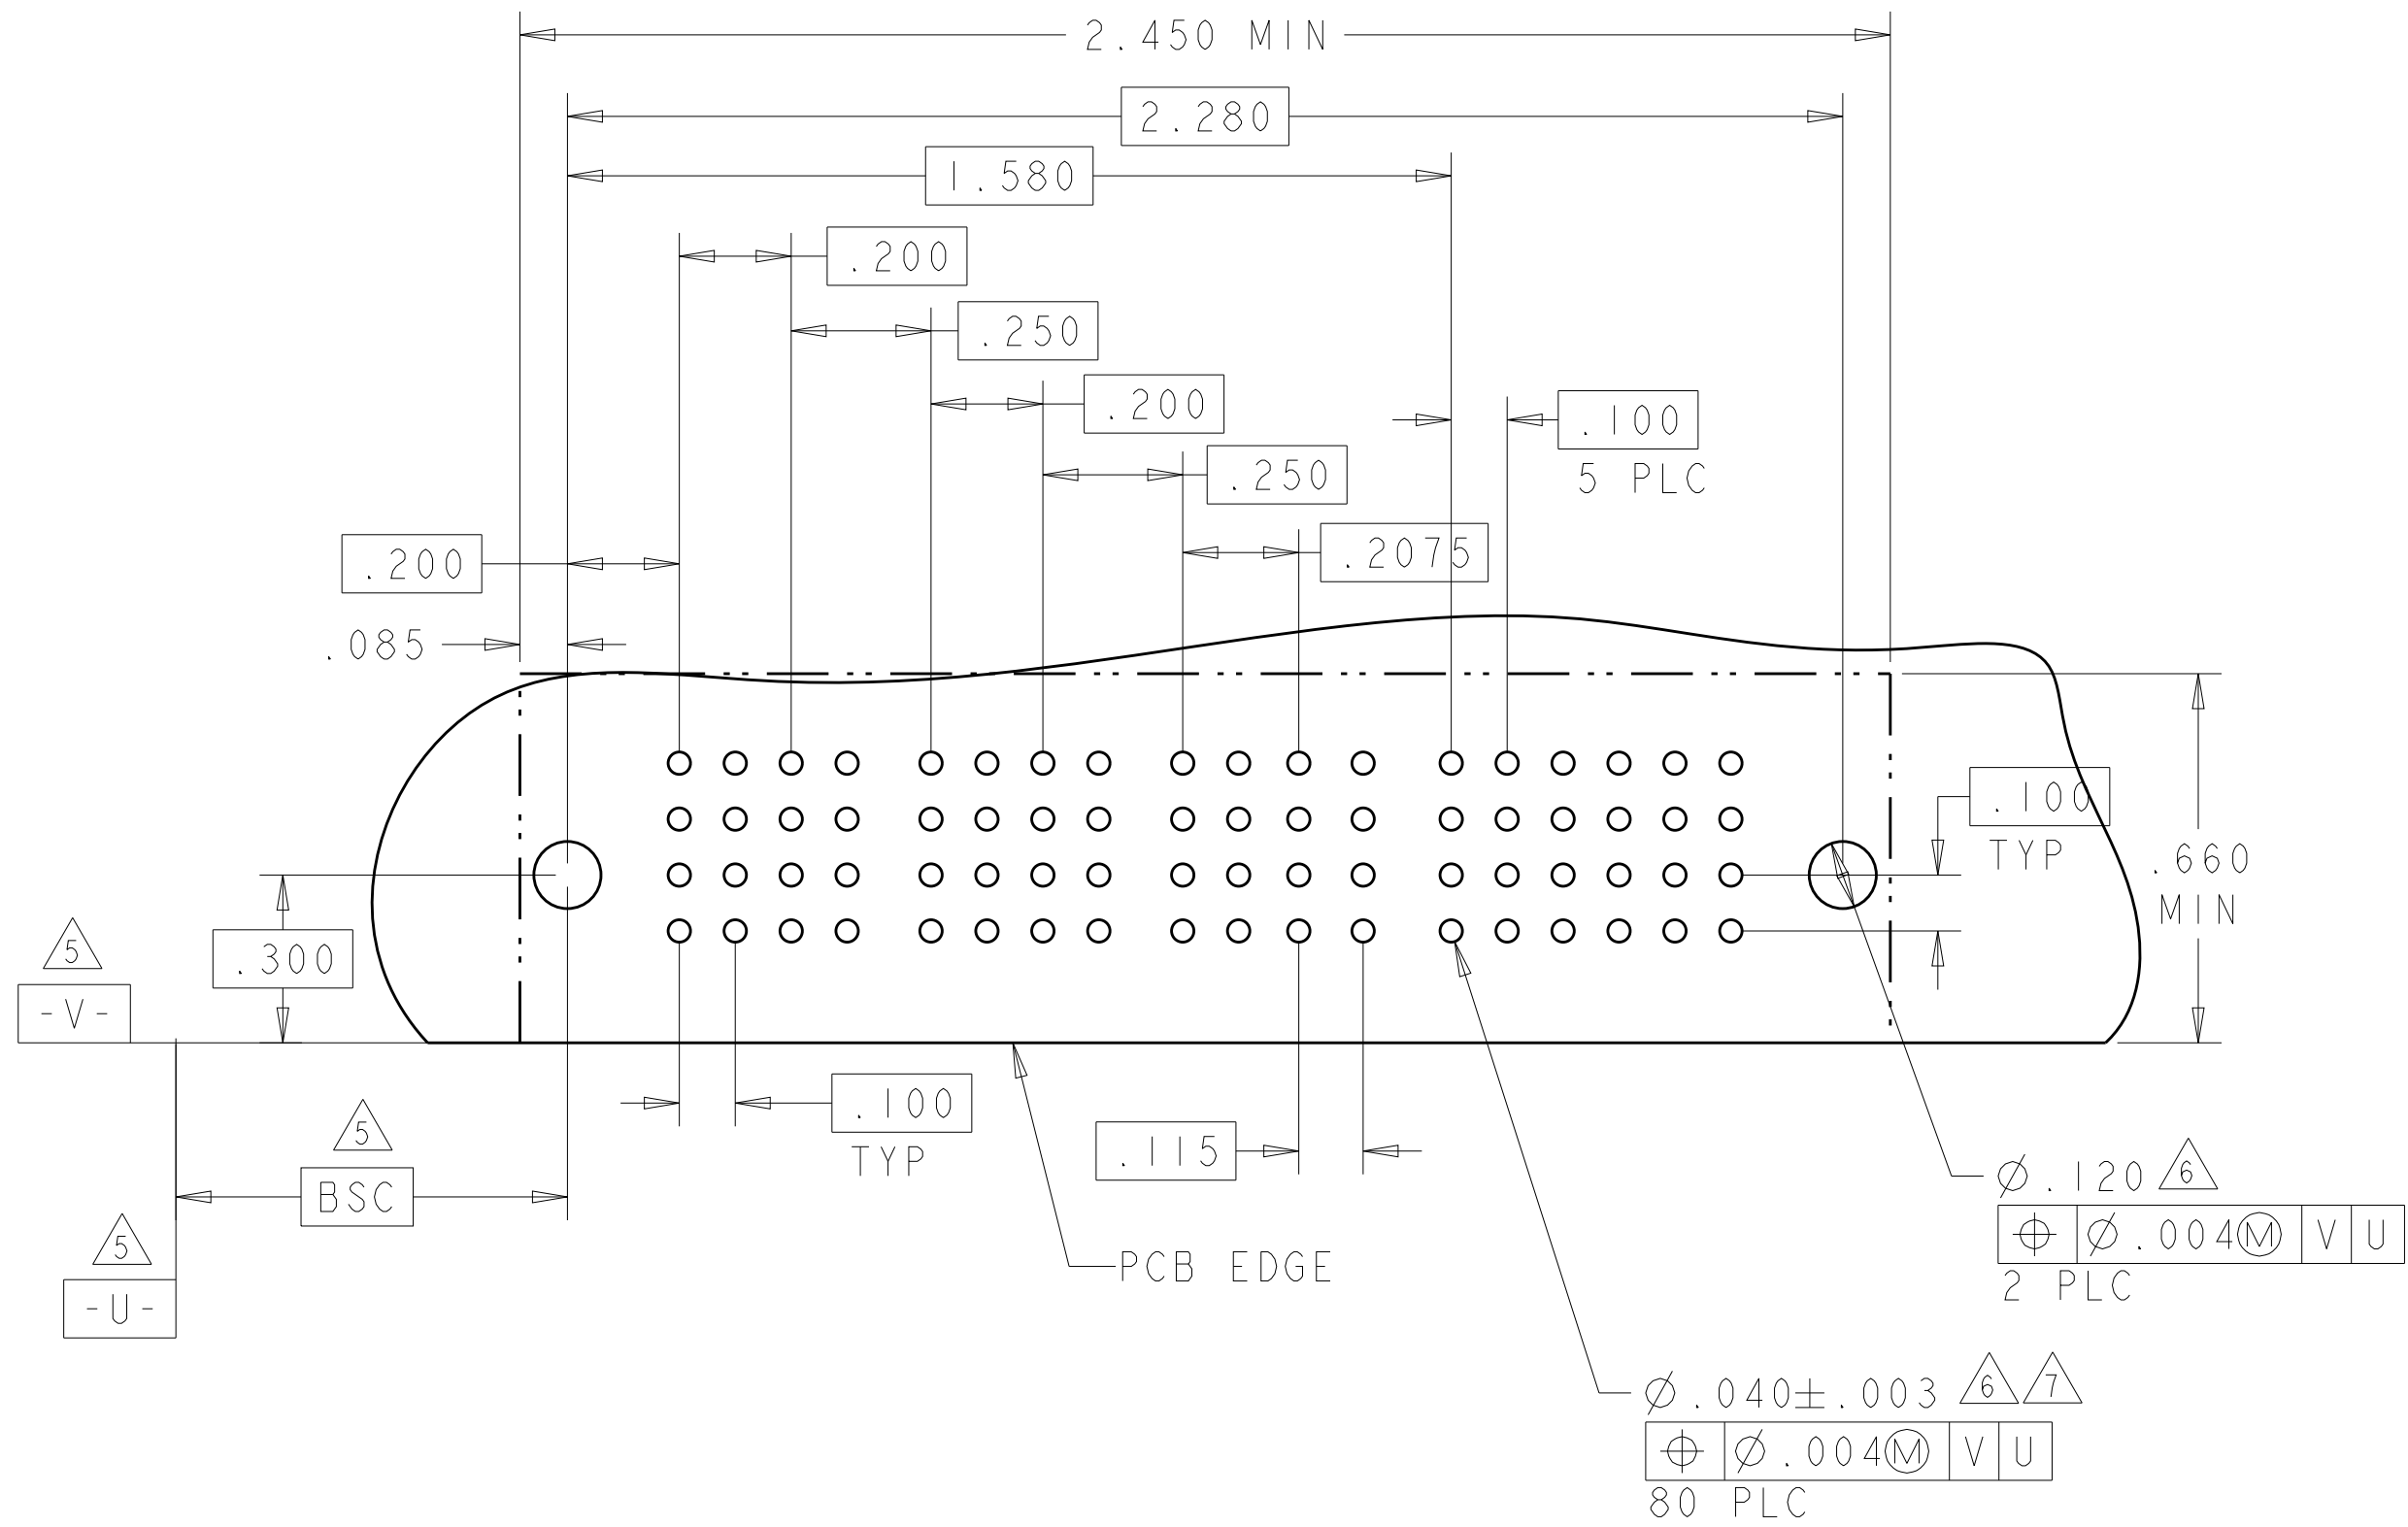

2-6450830-0 AND 2-6450830-5 PCB LAYOUT



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.LIU	27MAY2008		
		CW S.ZHAO	27MAY2008		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		TE Connectivity	
		APVD S.ZHAO		NAME R/A LEADER WITH SHORT GUIDES AND HP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		PRODUCT SPEC 108-2292			
		APPLICATION SPEC 114-13251			
		SIZE CAGE CODE DRAWING NO		RESTRICTED TO	
		A 00779 ©=6450832		-	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 12 OF 24 REV K4	

PART NUMBER	ROWS		POWER												SIGNAL																																																																																																																																																																																															
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6																																																																																																																																																																																											
2-6450832-8	D C B A	 HD																																																																																																																																																																																																												

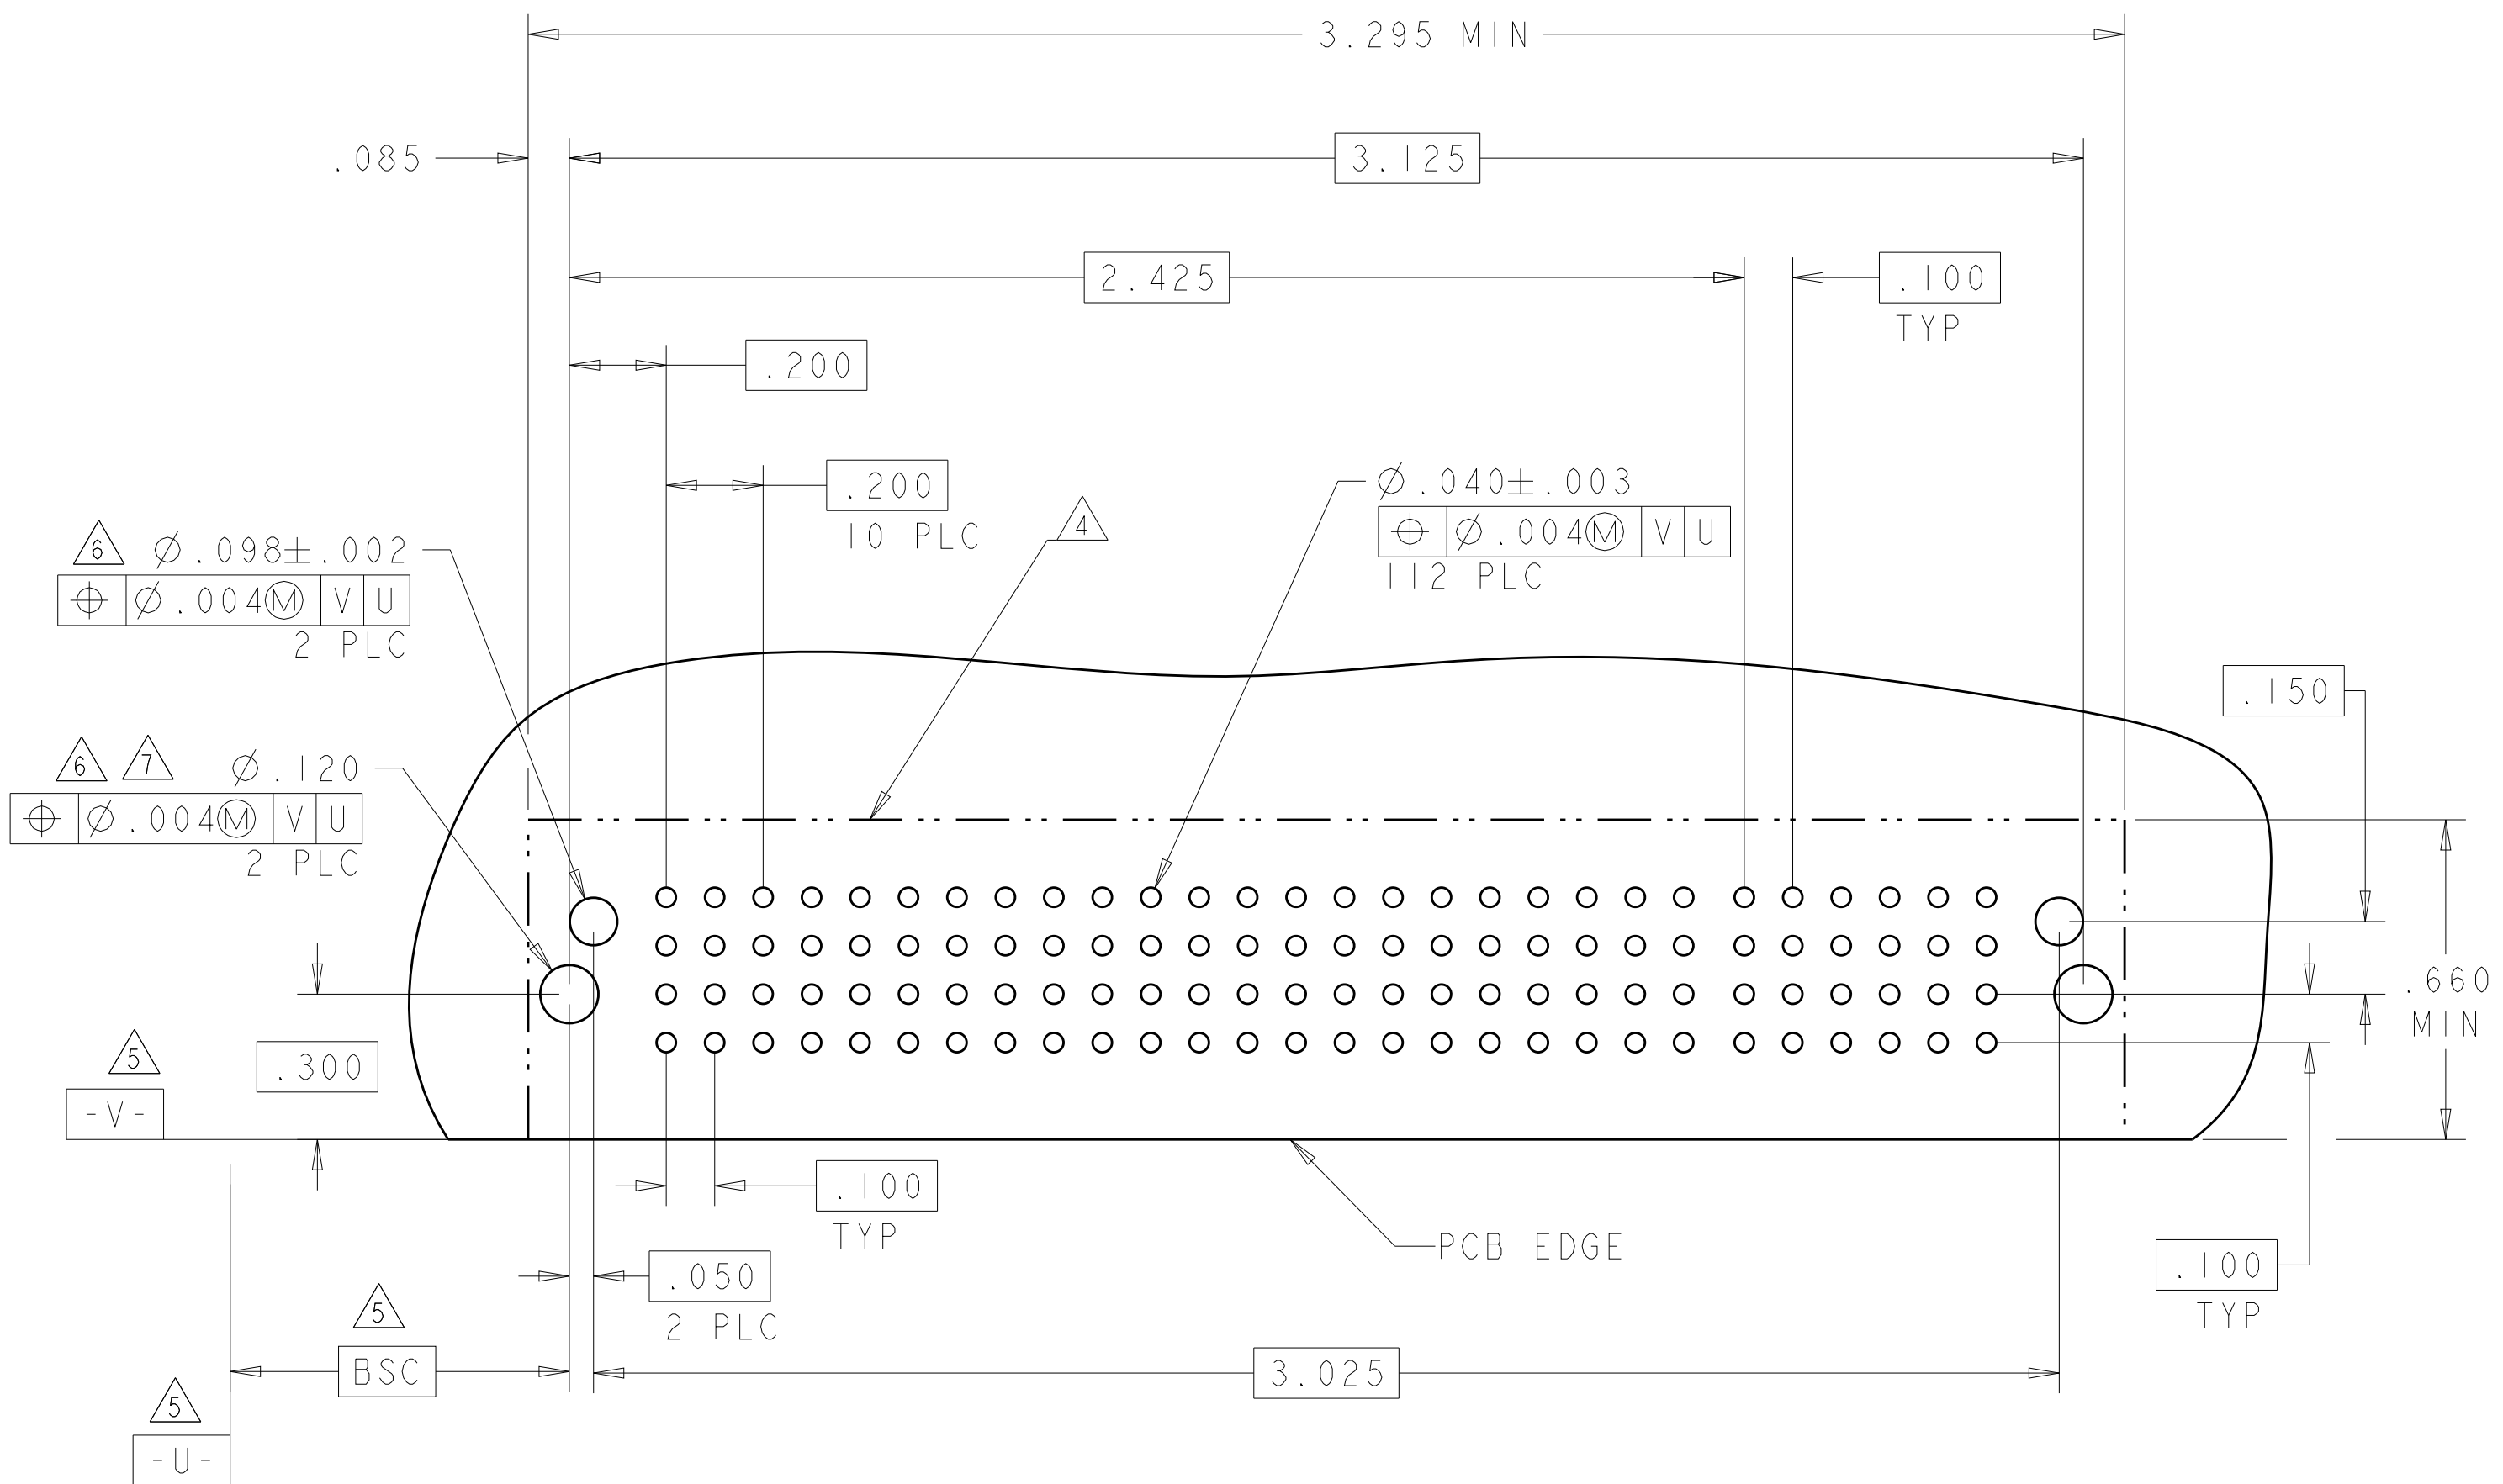4805 (3/11)

[illegible]4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

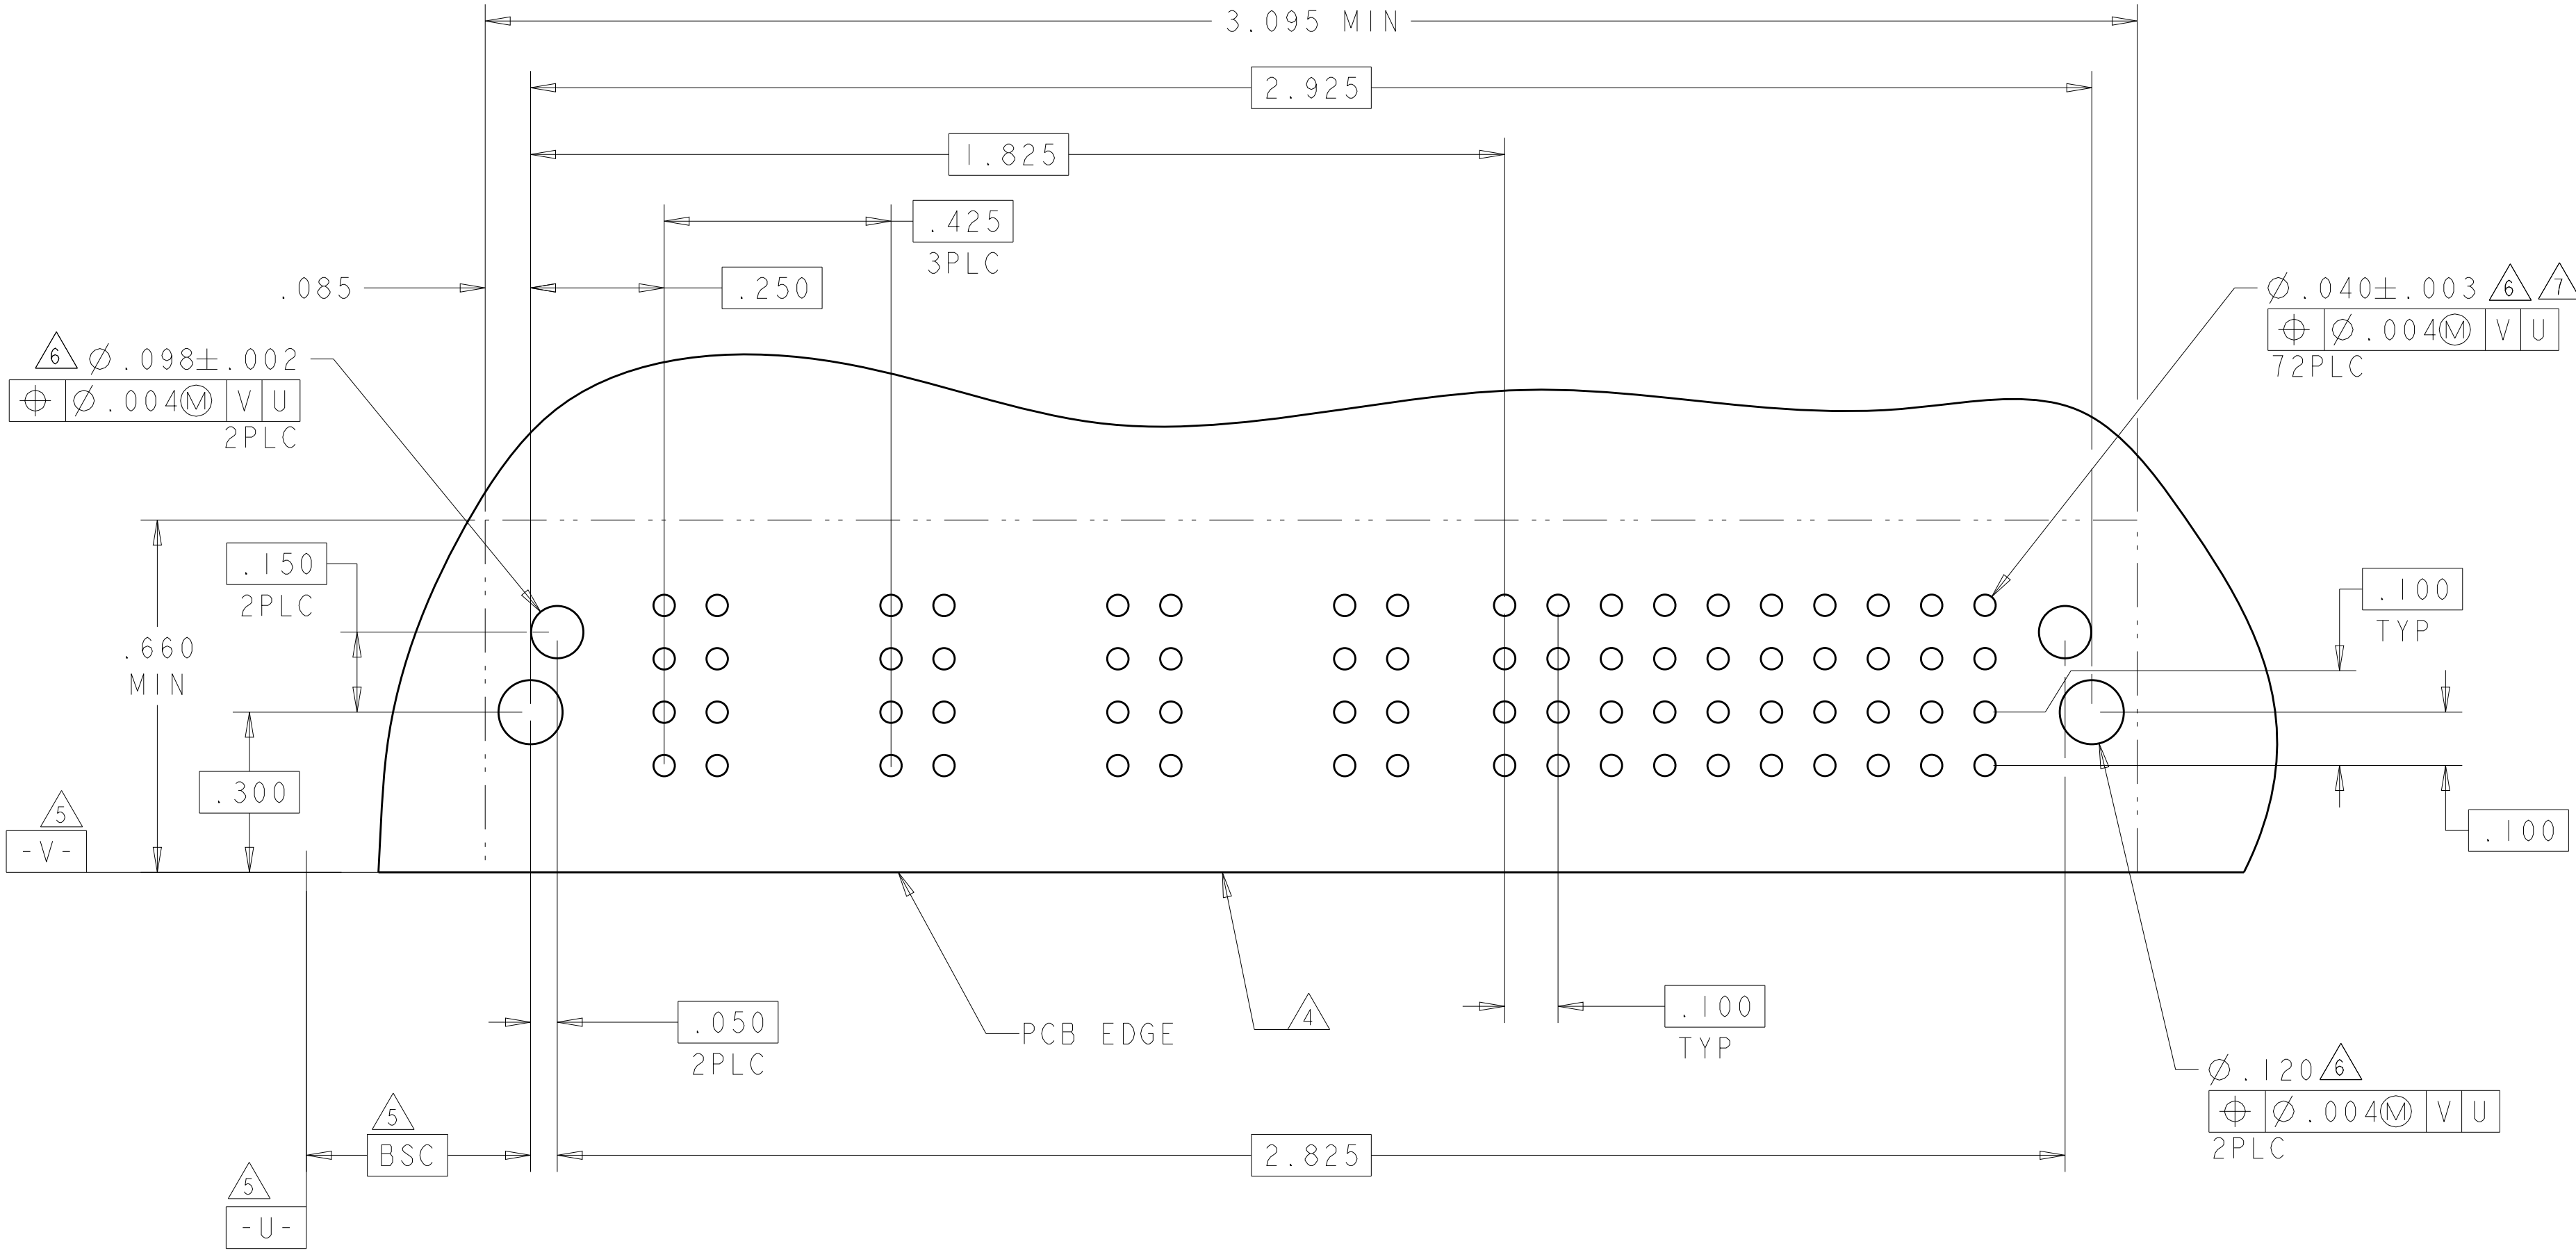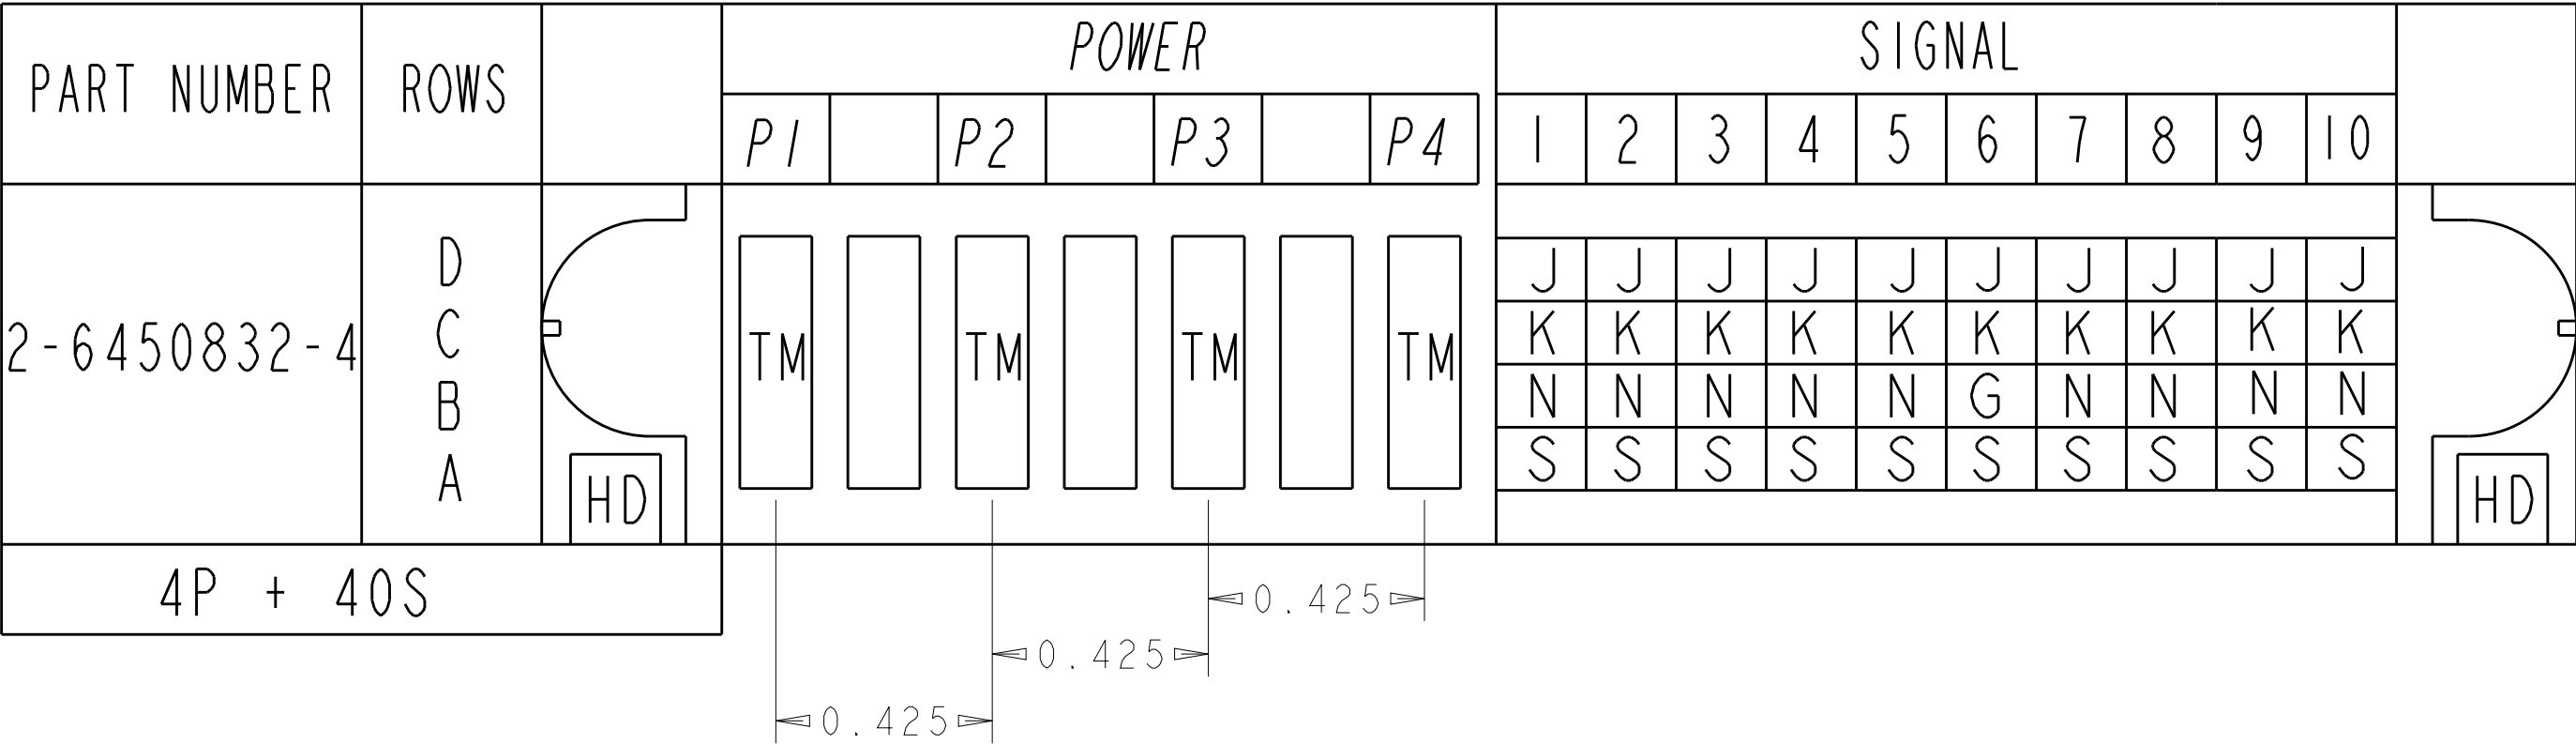

RECOMMENDED PCB LAYOUT BY TE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

H.LIU

27MAY2008

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

±"

1 PLC

±.01

2 PLC

±.01

3 PLC

±.005

4 PLC

±.0020

ANGLES

±2°

FINISH

MATERIAL

DWN

S.ZHAO

27MAY2008

CHK

S.ZHAO

27MAY2008

APVD

S.ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

C=6450832

RESTRICTED TO

-

SCALE

4:1

SHEET

15

OF

24

REV



K4

TE Connectivity




LOC	DIST	REVISIONS				
		P	LYR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER						SIGNAL						
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	
2-6450832-6	D		TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	
	C								K	K	K	K	K	K	
	B								N	N	N	N	N	N	
	A								S	S	S	S	S	S	
6HDP + 24S															



PART NUMBER	ROWS		POWER				SIGNAL		
			P1	P2	P3	P4	1	2	
3-6450832-0	D		TM	TM	TM	TM	J	E	
	C						K	F	
	B						N	G	
	A						S	H	
4ACP + 8S									

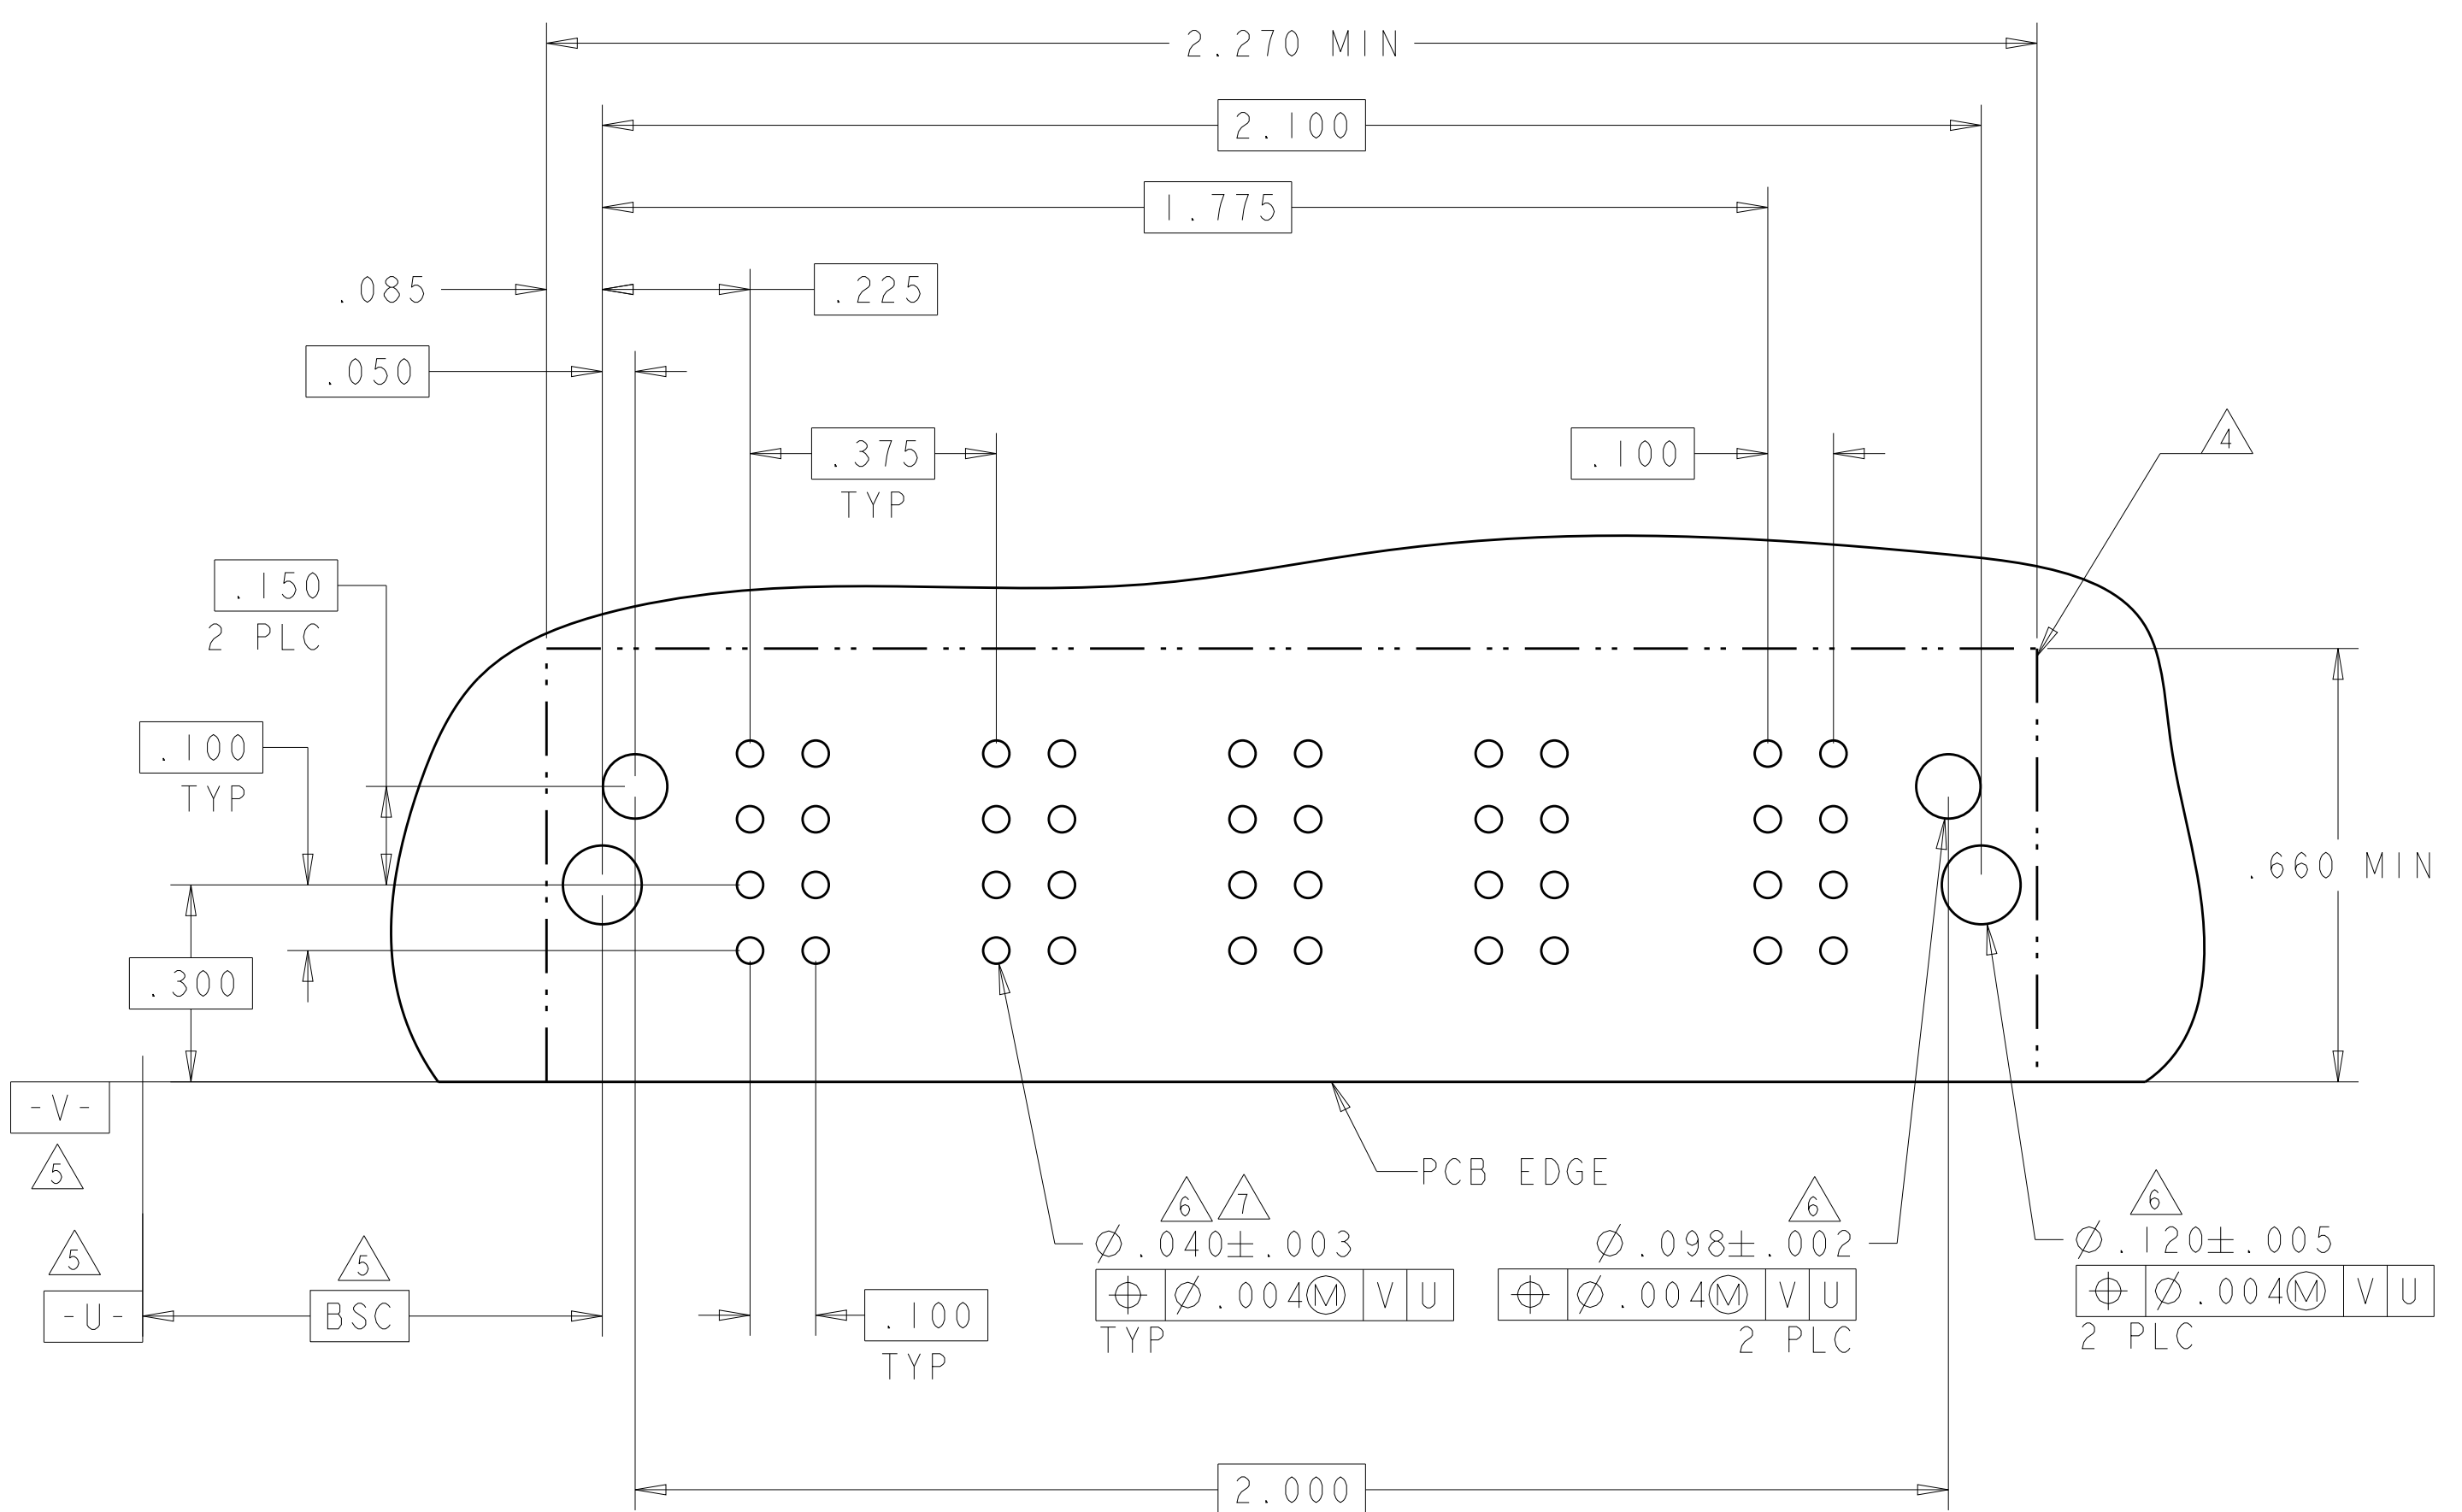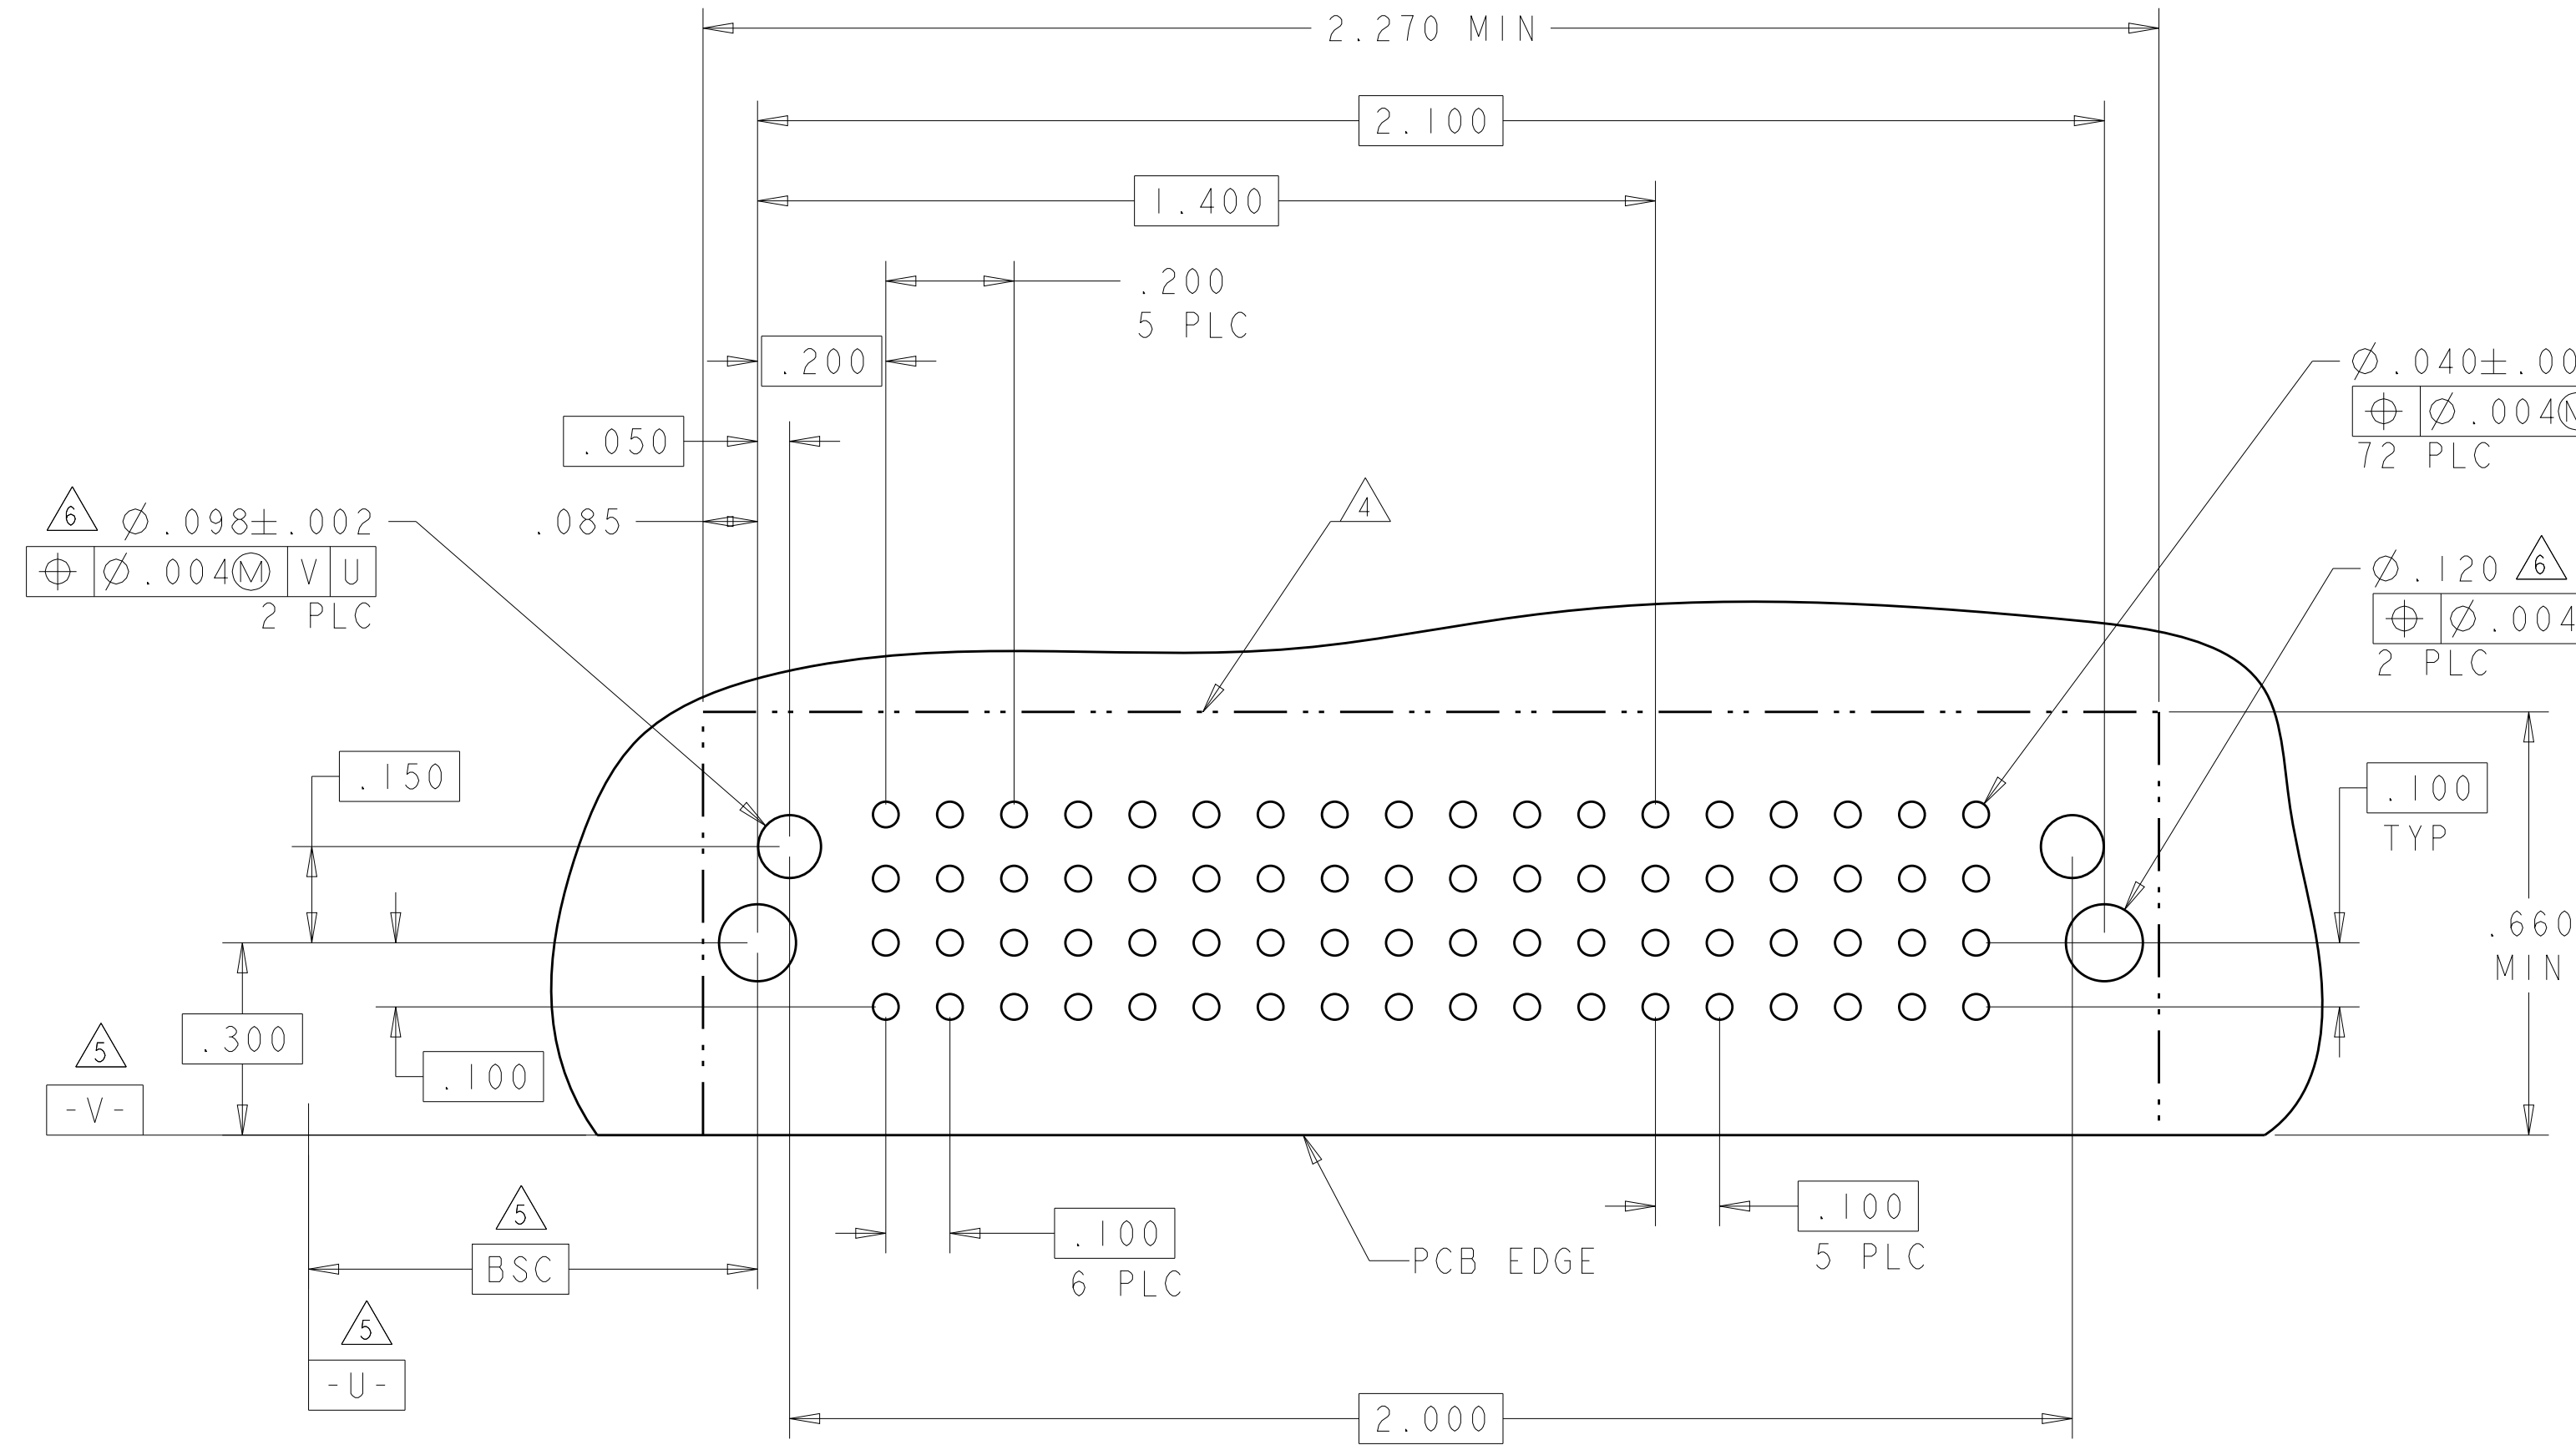

LOC		DIST		REVISONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL		
			P1	P2	1	2	
3-6450832-1	D		LM	LM	J	J	
	C				K	K	
	B				N	N	
	A				S	S	
 HD			 HD				
2LP + 8S							

PART NUMBER	ROWS		POWER										SIGNAL							
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6	
3-6450832-2	D		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	E	
														K	K	K	K	K	F	
														N	N	N	N	N	N	
														S	S	S	S	S	S	
11HDP + 24S																				

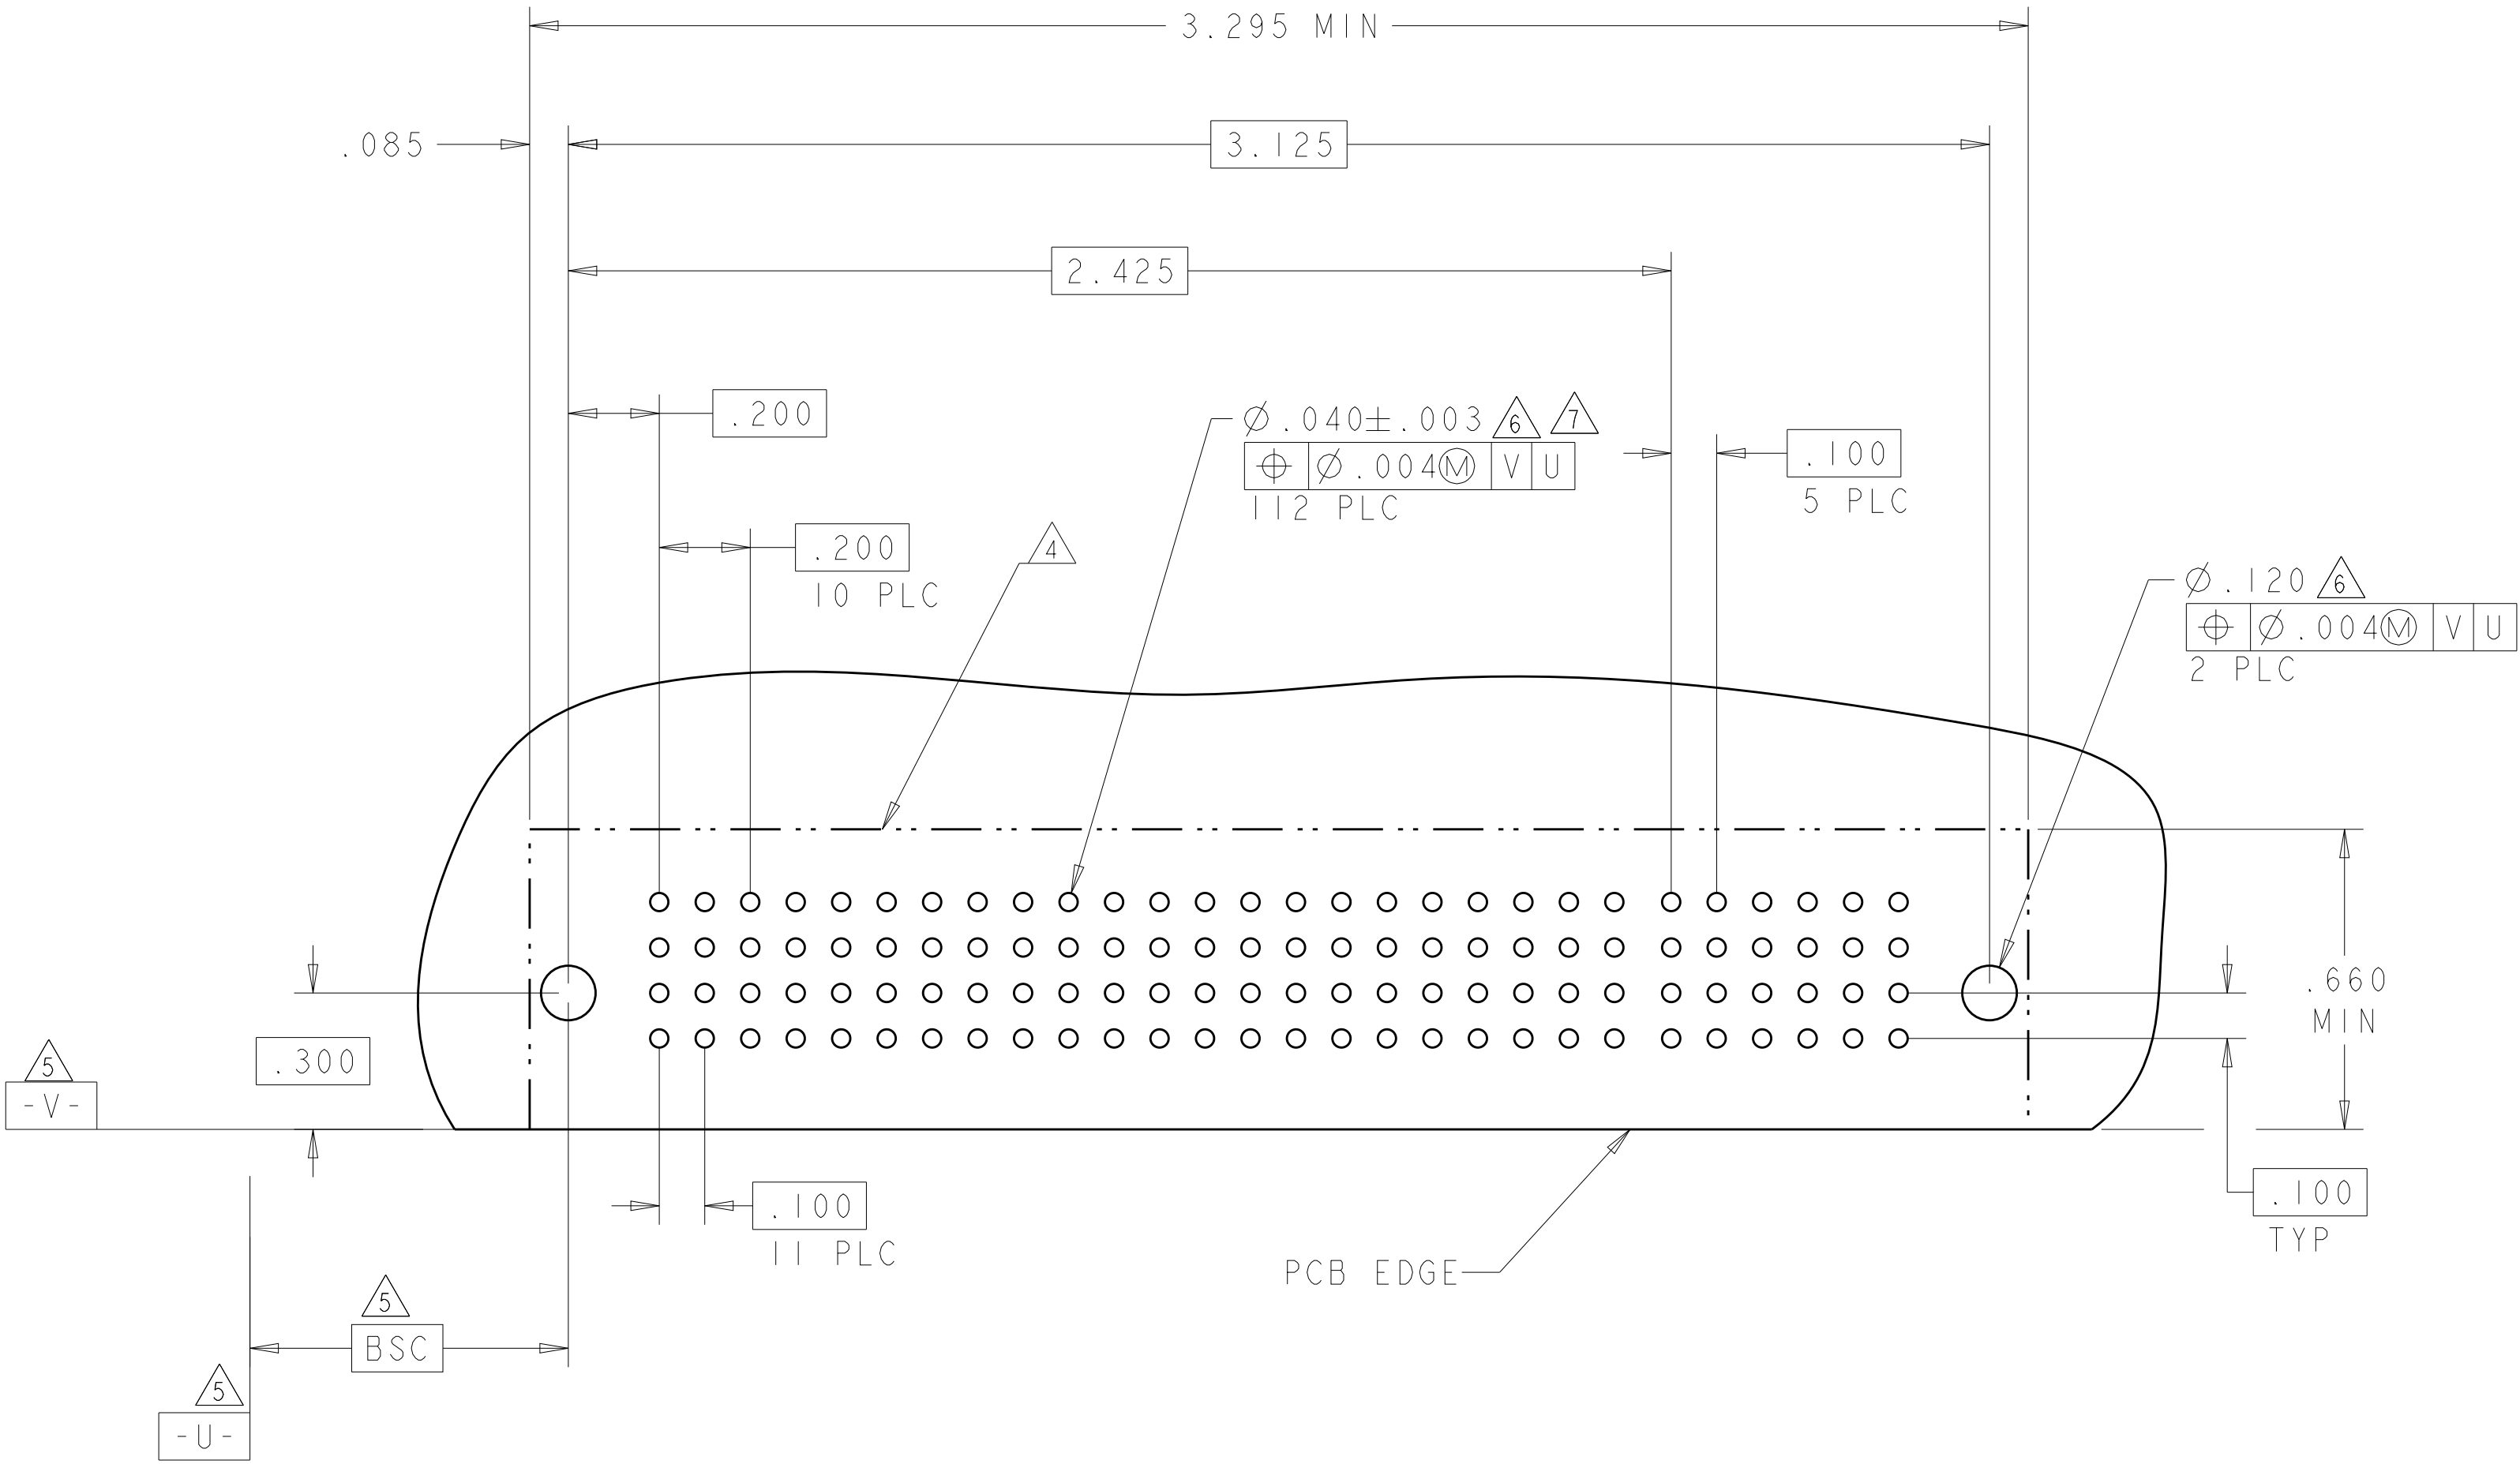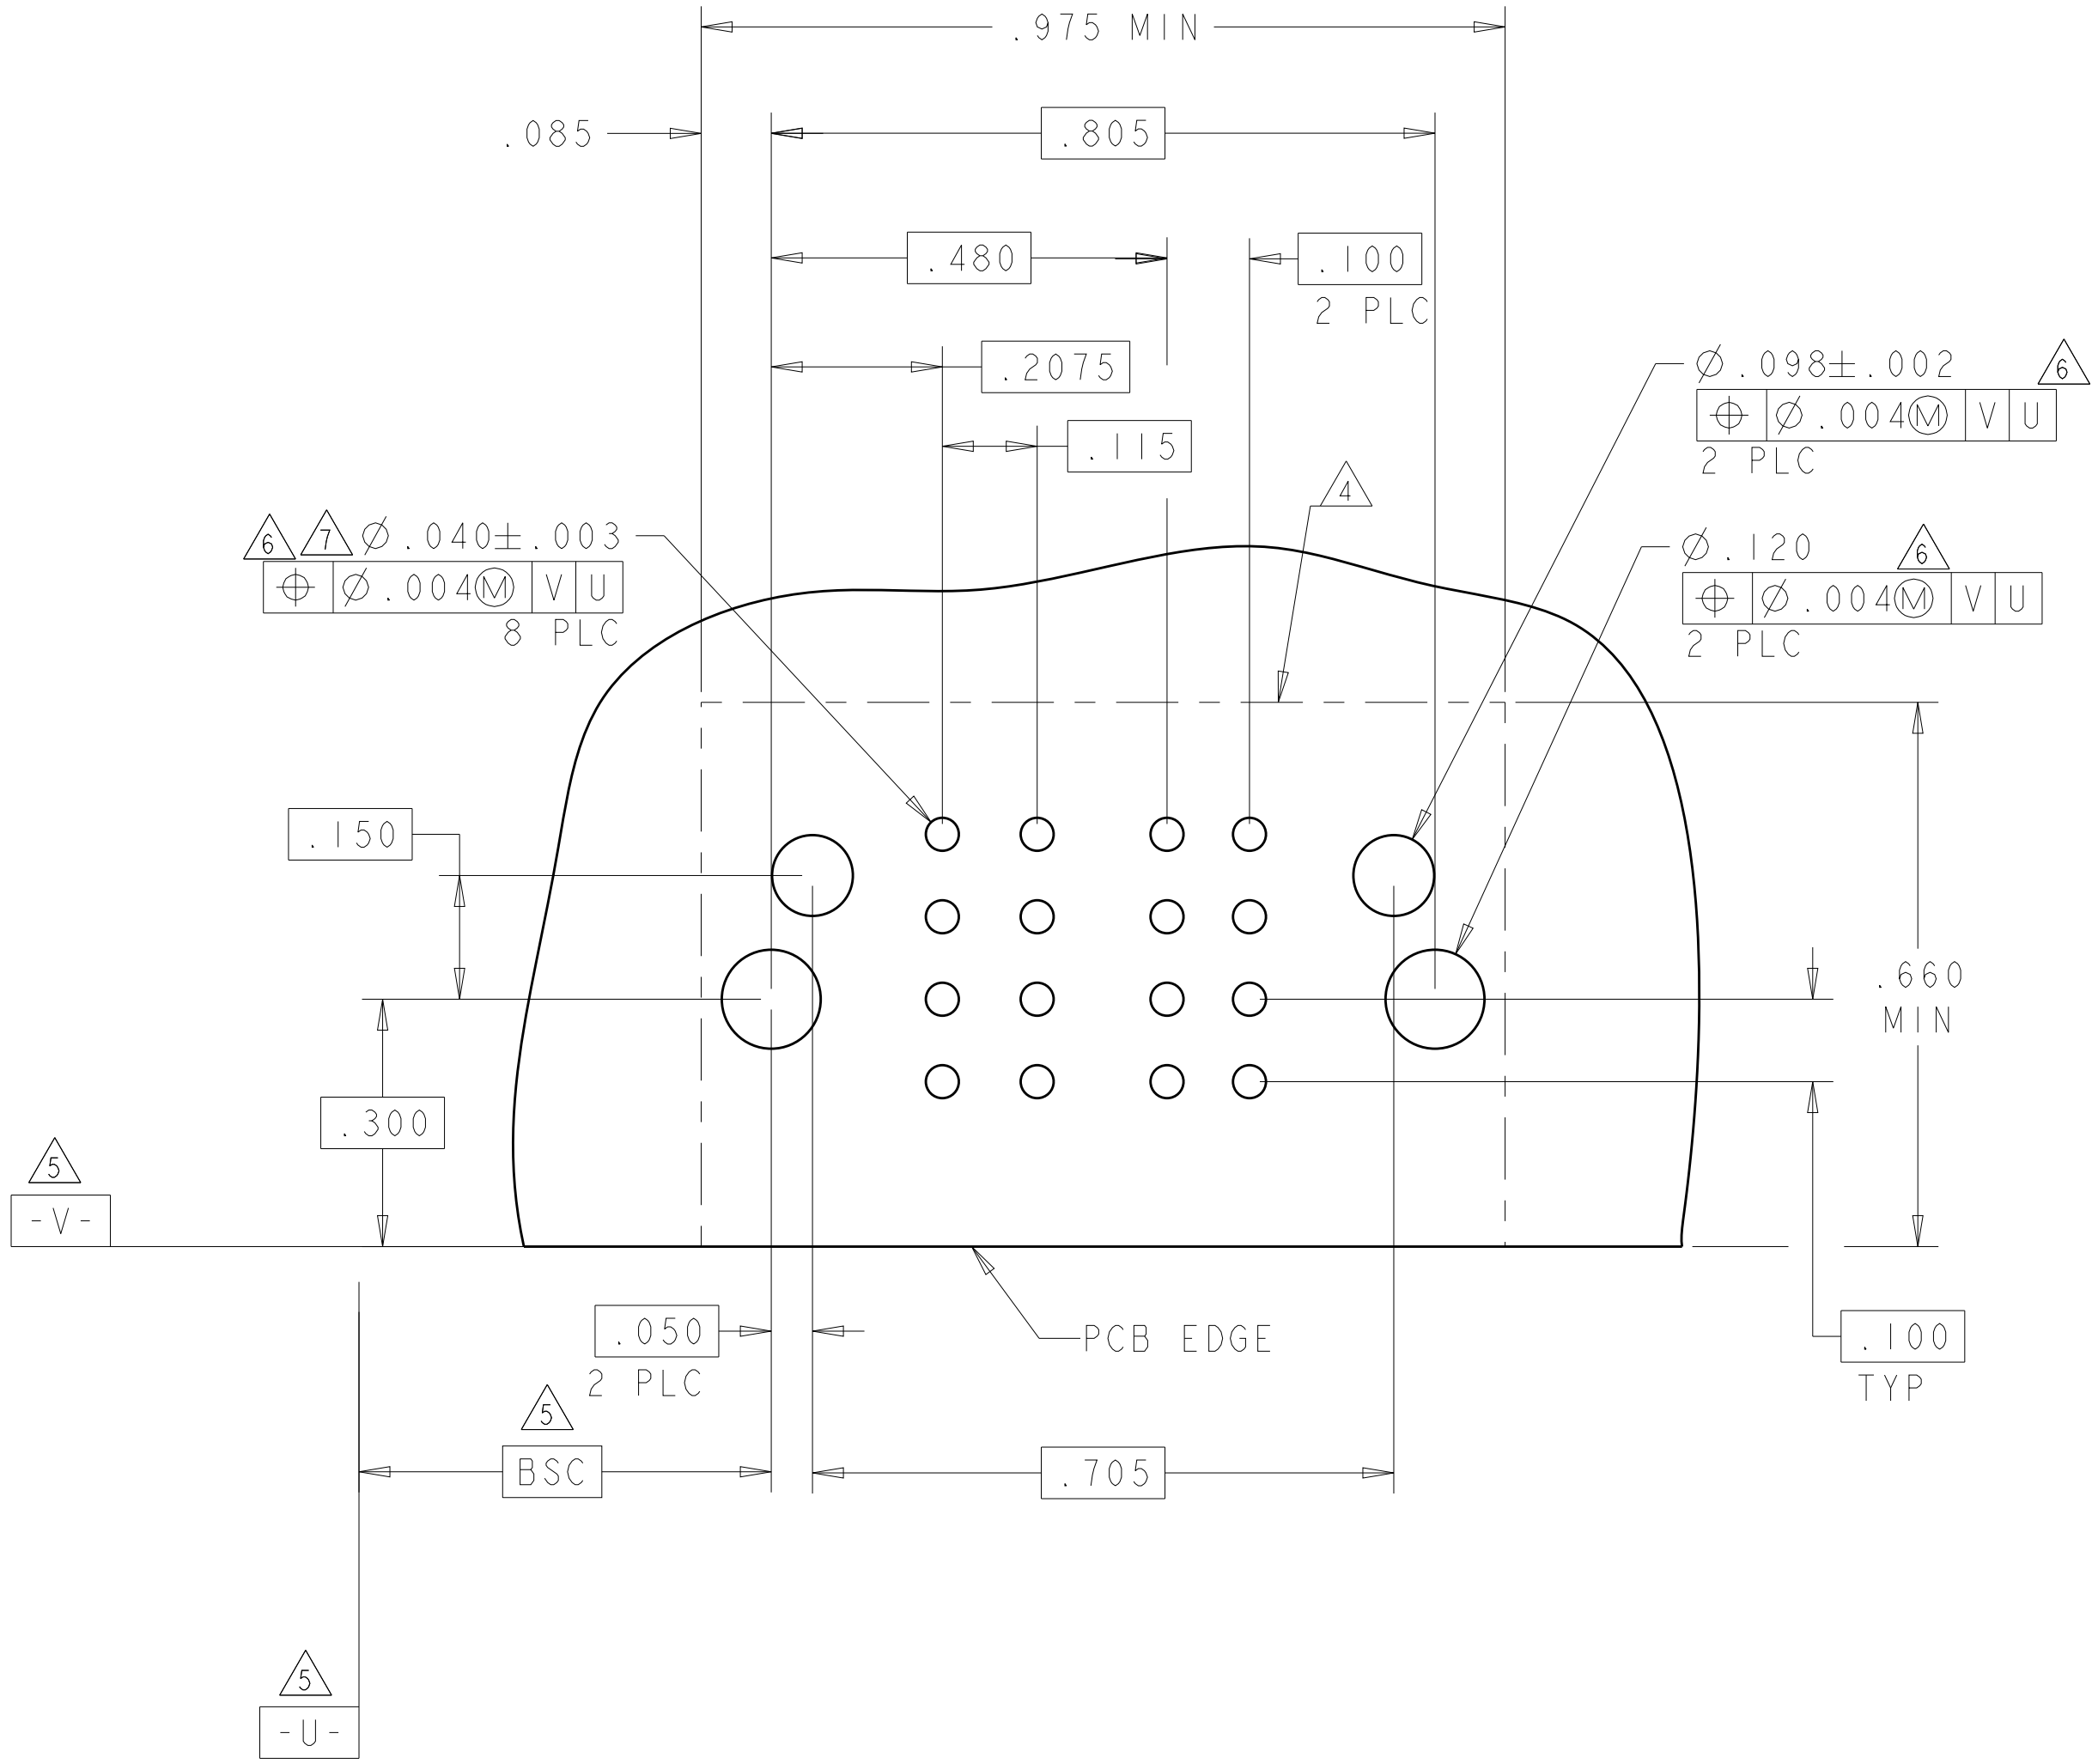

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
H. LIU
27MAY2008

CHK
S. ZHAO
27MAY2008

APVD
S. ZHAO

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.002

ANGLES ±.2°

FINISH

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

CUSTOMER DRAWING

NAME

R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

C=6450832

RESTRICTED TO

-

SCALE

4:1

SHEET

17


OF

24

REV

K4

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

ASSY PART NUMBER	ROWS		POWER											SIGNAL																		
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16			
3-6450832-3	D C B A		TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J	J	J						J			
														K	K	K	K	K	K	K	K	K	K	K							K	
														N	N	N	N	N	N	N	N	N	N	N	N							N
														S	S	S	S	S	S	S	S	S	S	S	S							S
5P+2HDP+4P+64S		HD																												S	HD	

 .225
4 PLC

 .250
3 PLC


 .275

NO CONTACTS LOADED

NO CONTACTS LOADED

NO CONTACTS LOADED



 .200
2 PLC

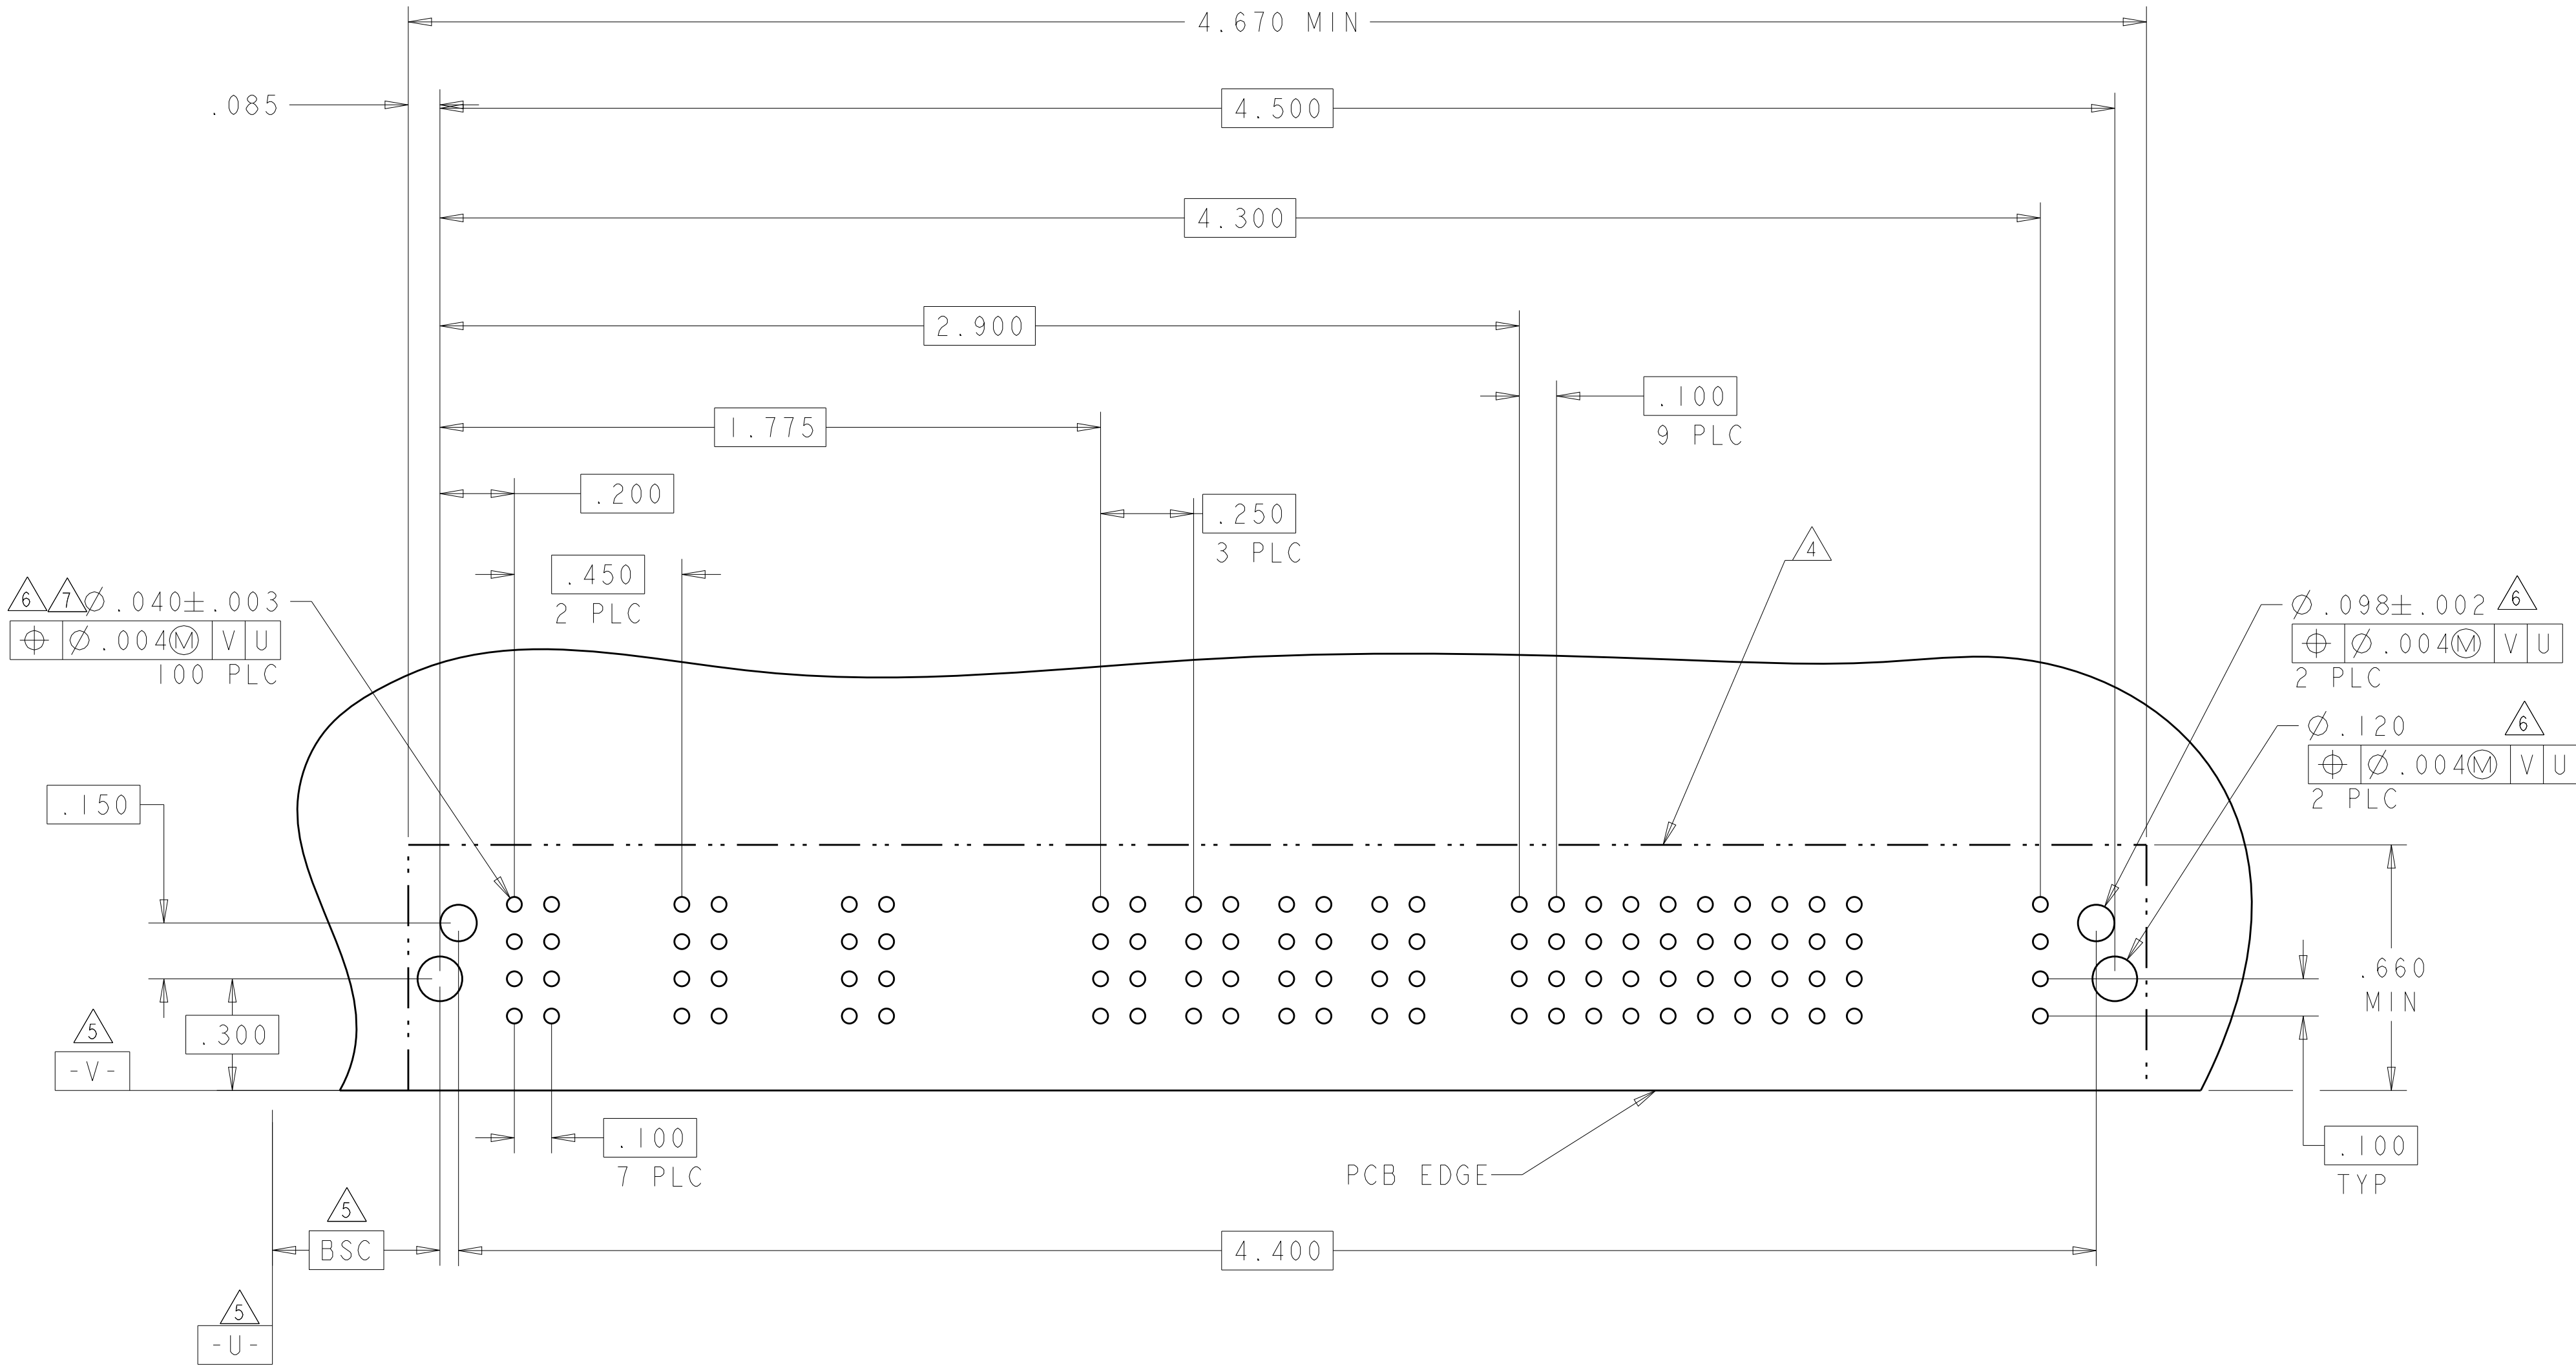





THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN H.LIU27MAY2008		 TE Connectivity	
				CHK S.ZHAO27MAY2008			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APRD S.ZHAO-		NAME R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
				PRODUCT SPEC 108-2292			
		0 PLC±"		APPLICATION SPEC		SIZECAGE CODEDRAWING NORESTRICTED TO	
		1 PLC±.01		114-13251			
		2 PLC±.05		WEIGHT-		A100779C=6450832-	
		3 PLC±.0020					
		ANGLES#2°					
		FINISH					
MATERIAL				CUSTOMER DRAWING		SCALE4:1SHEET18 OF 24REV K4	

PART NUMBER	ROWS		POWER															SIGNAL									
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	1	2	3	4	5	6	7			
3-6450832-6	D																	E	E	E	E	E	E	E			
	C		TM	TM	TM	TM			TM	TM	TM	TM		TM	TM	TM	TM	F	F	F	K	K	K	K			
	B																		N	N	N	N	N	N	N		
	A																			H	H	H	H	H	H	H	
15P + 28S																											

—NO CONTACTS LOADED

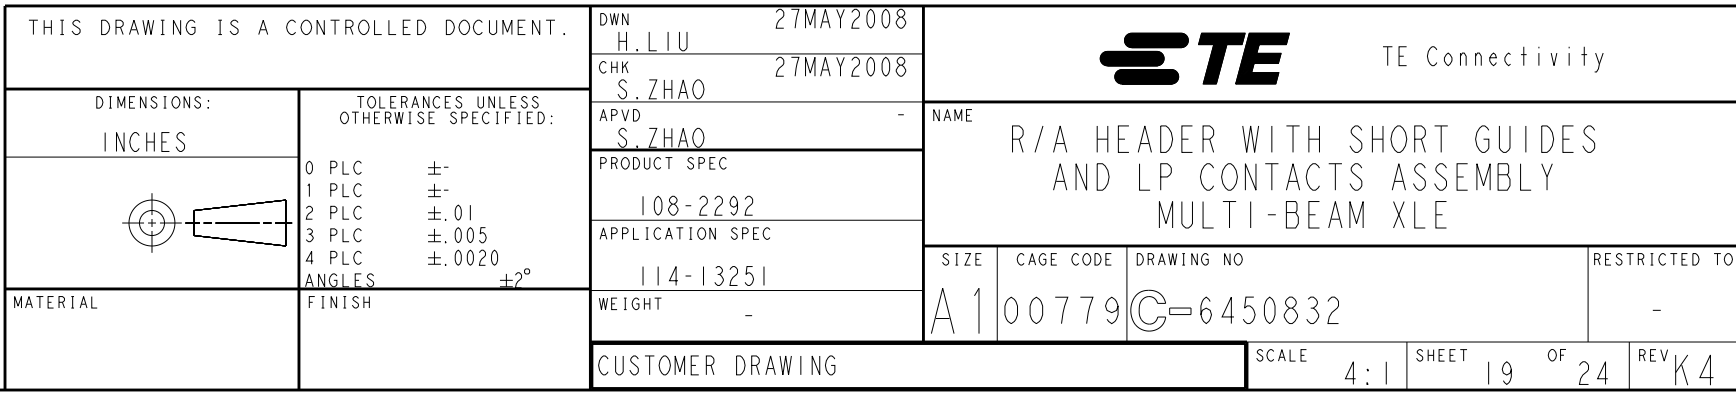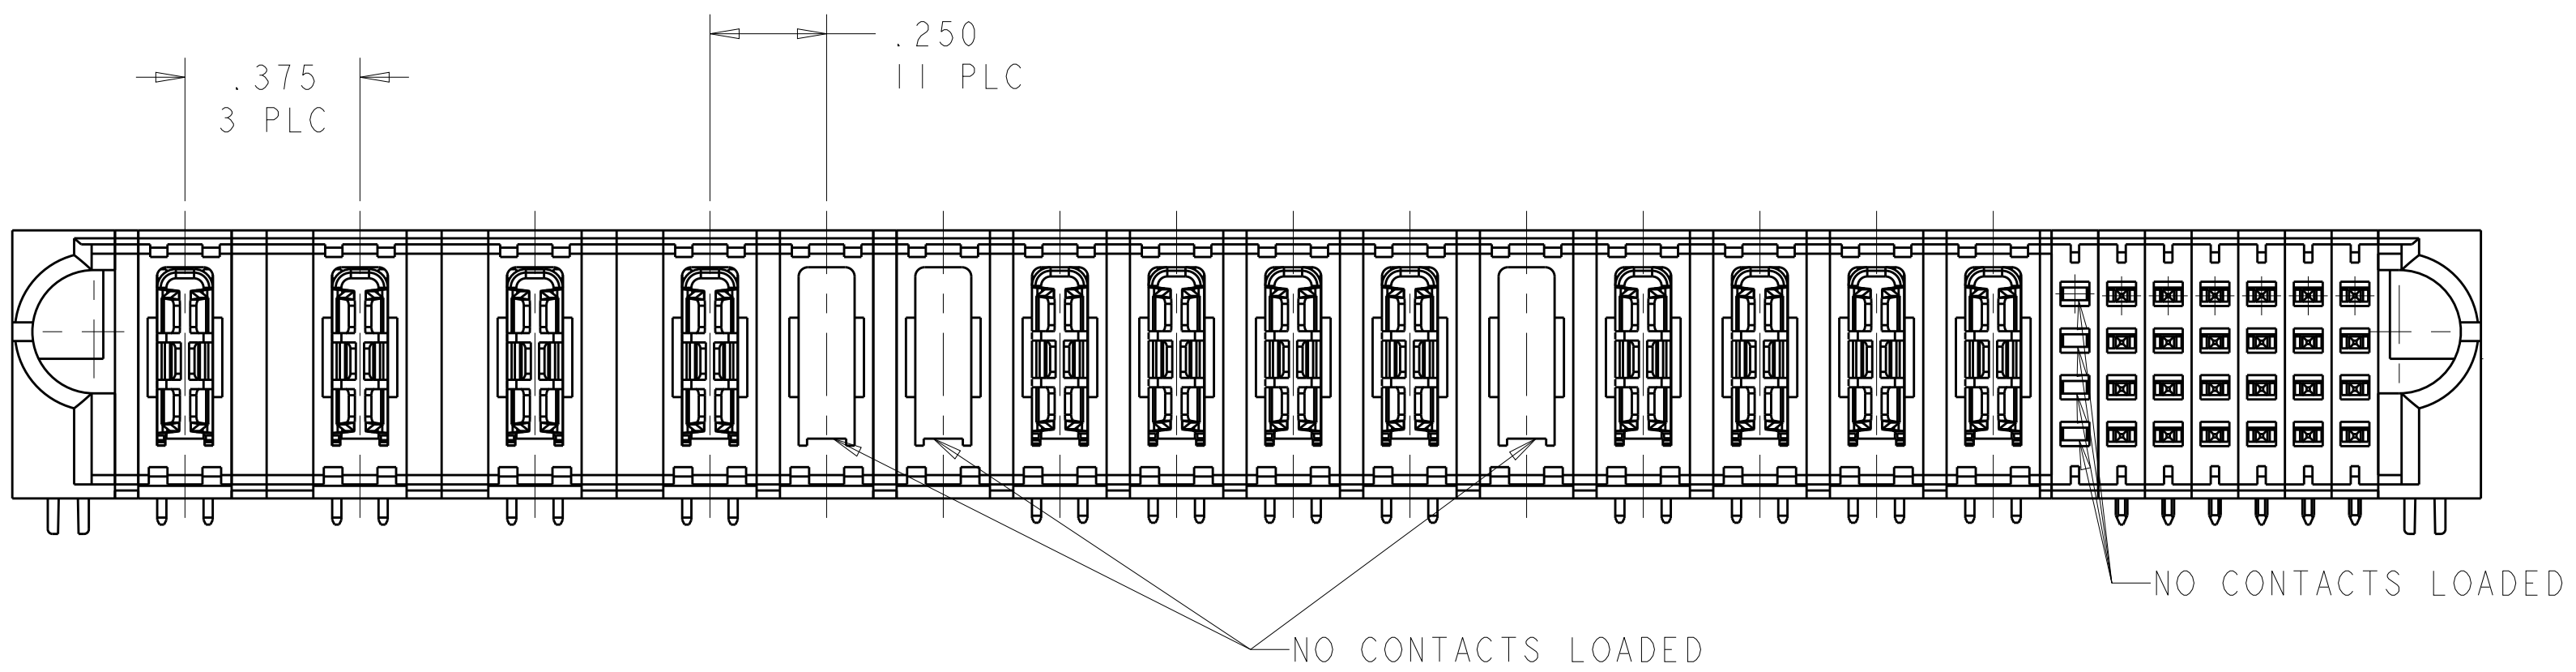

LOC		DIST		REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

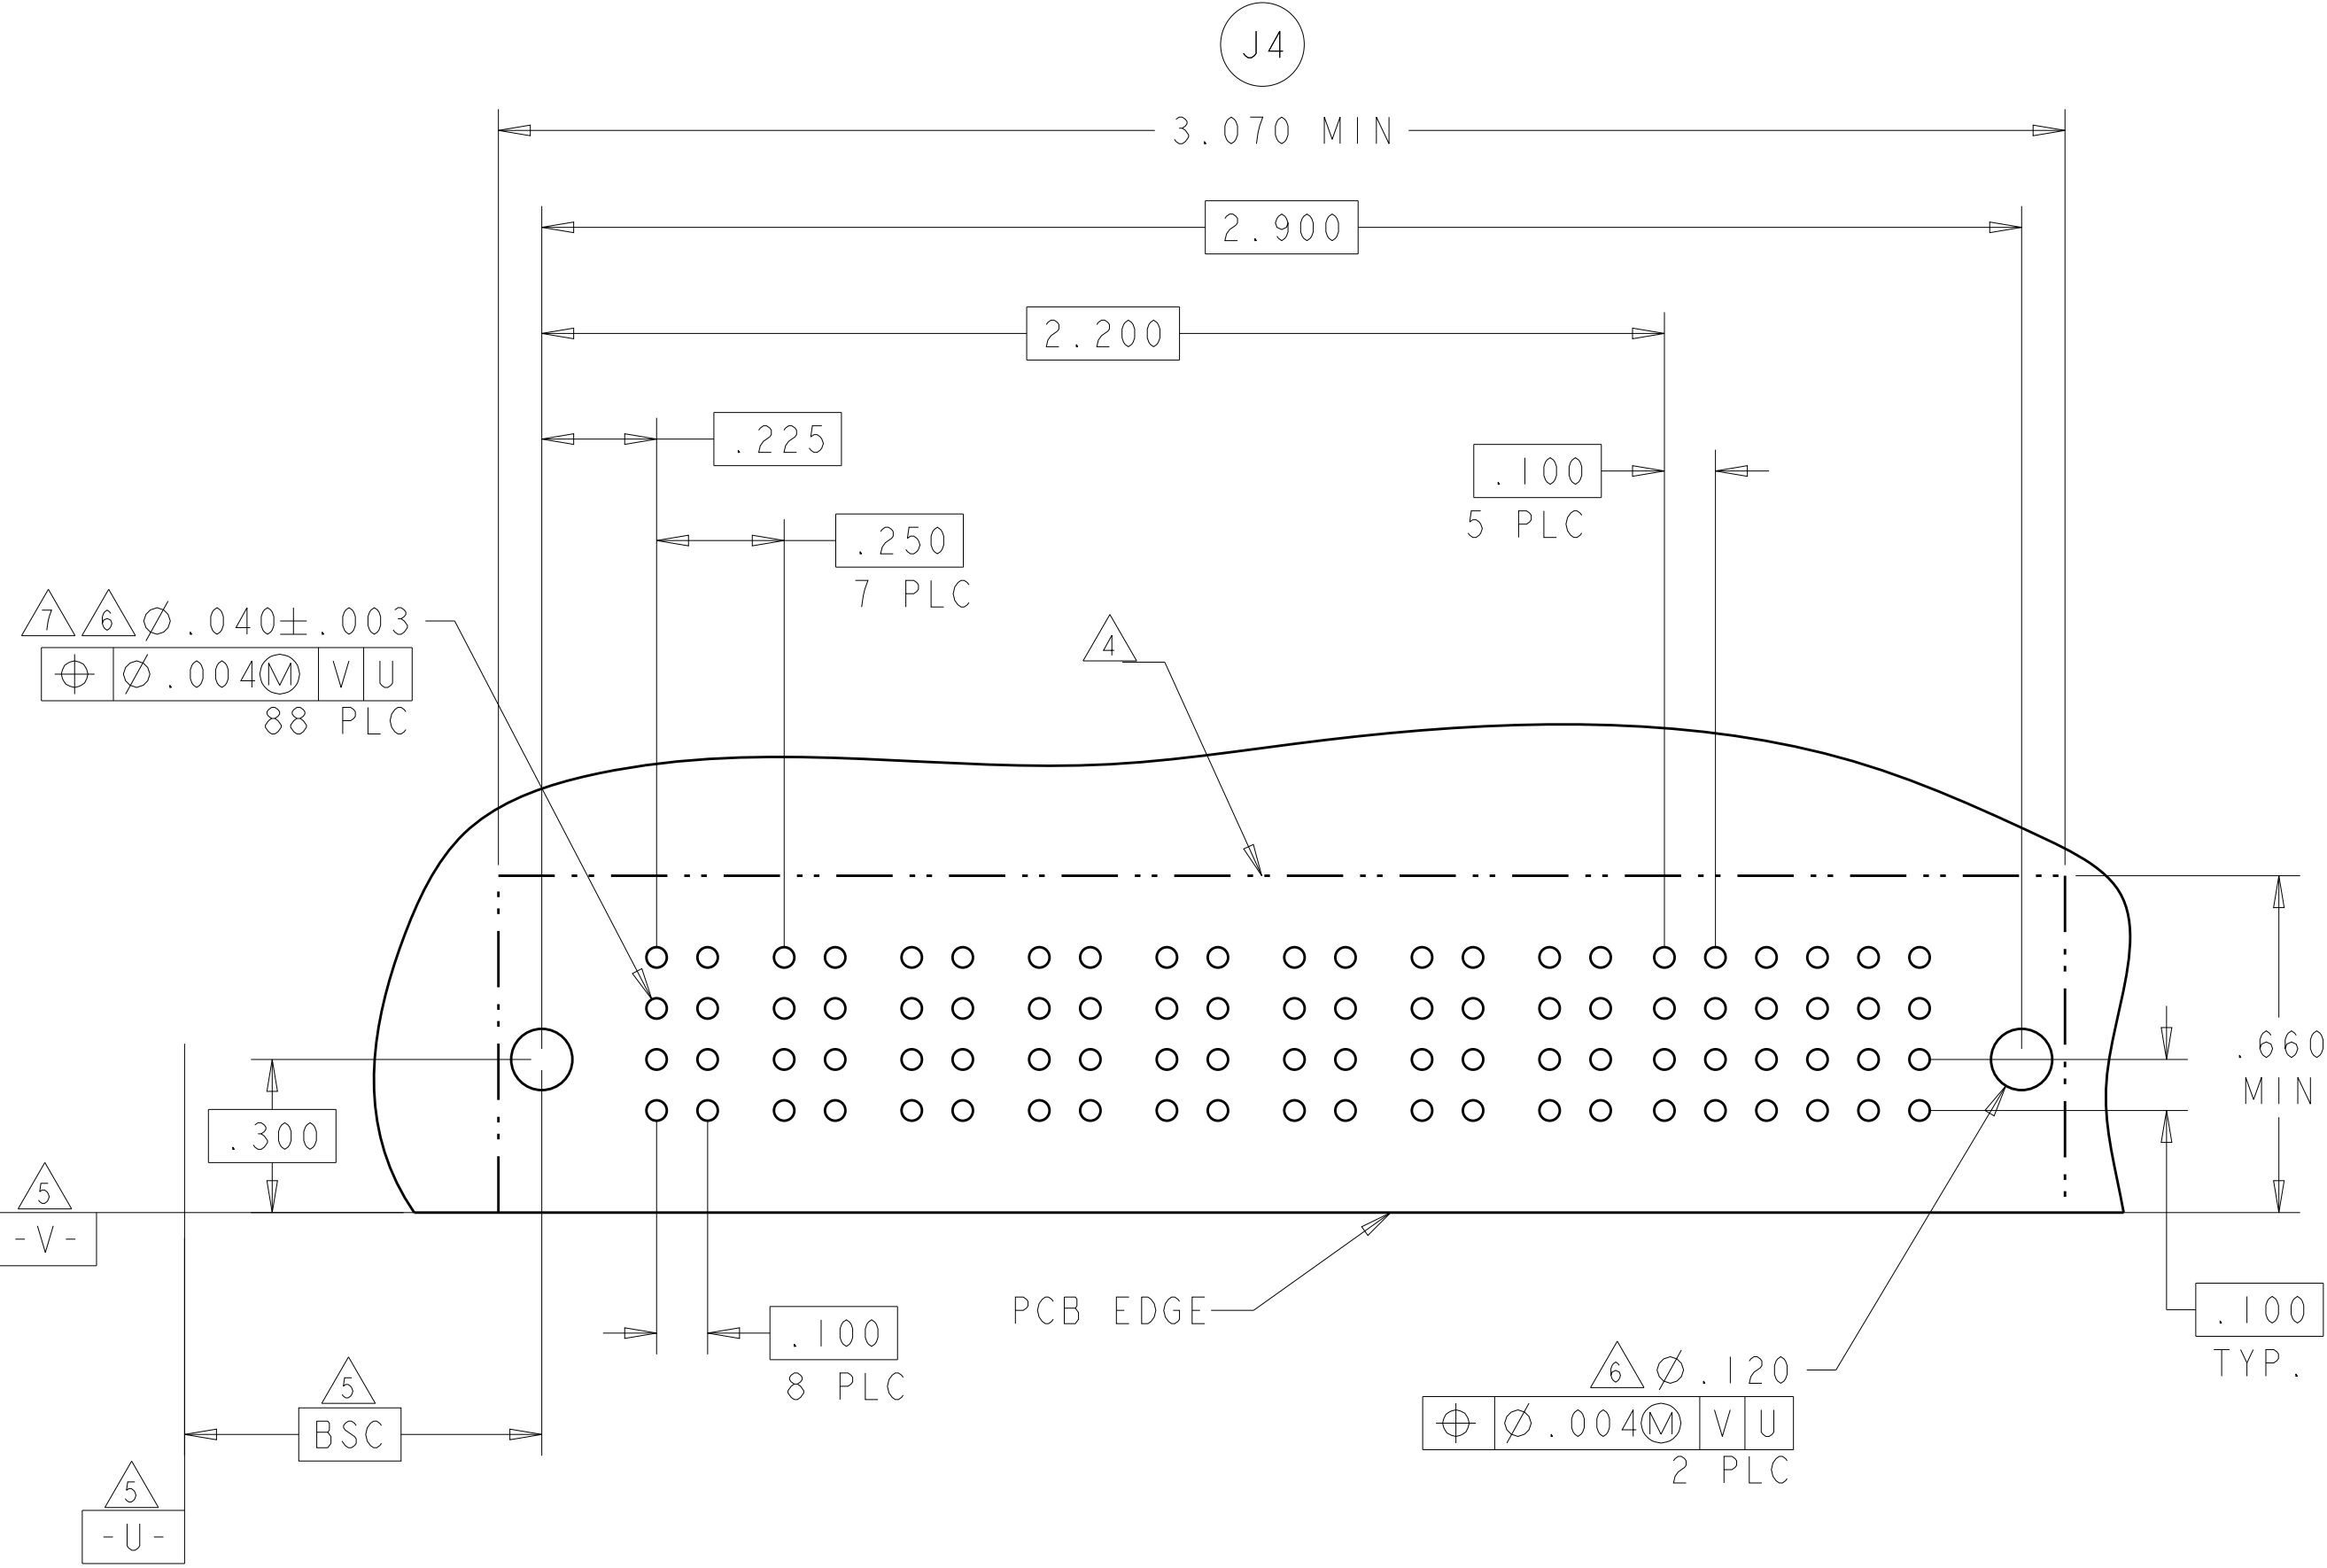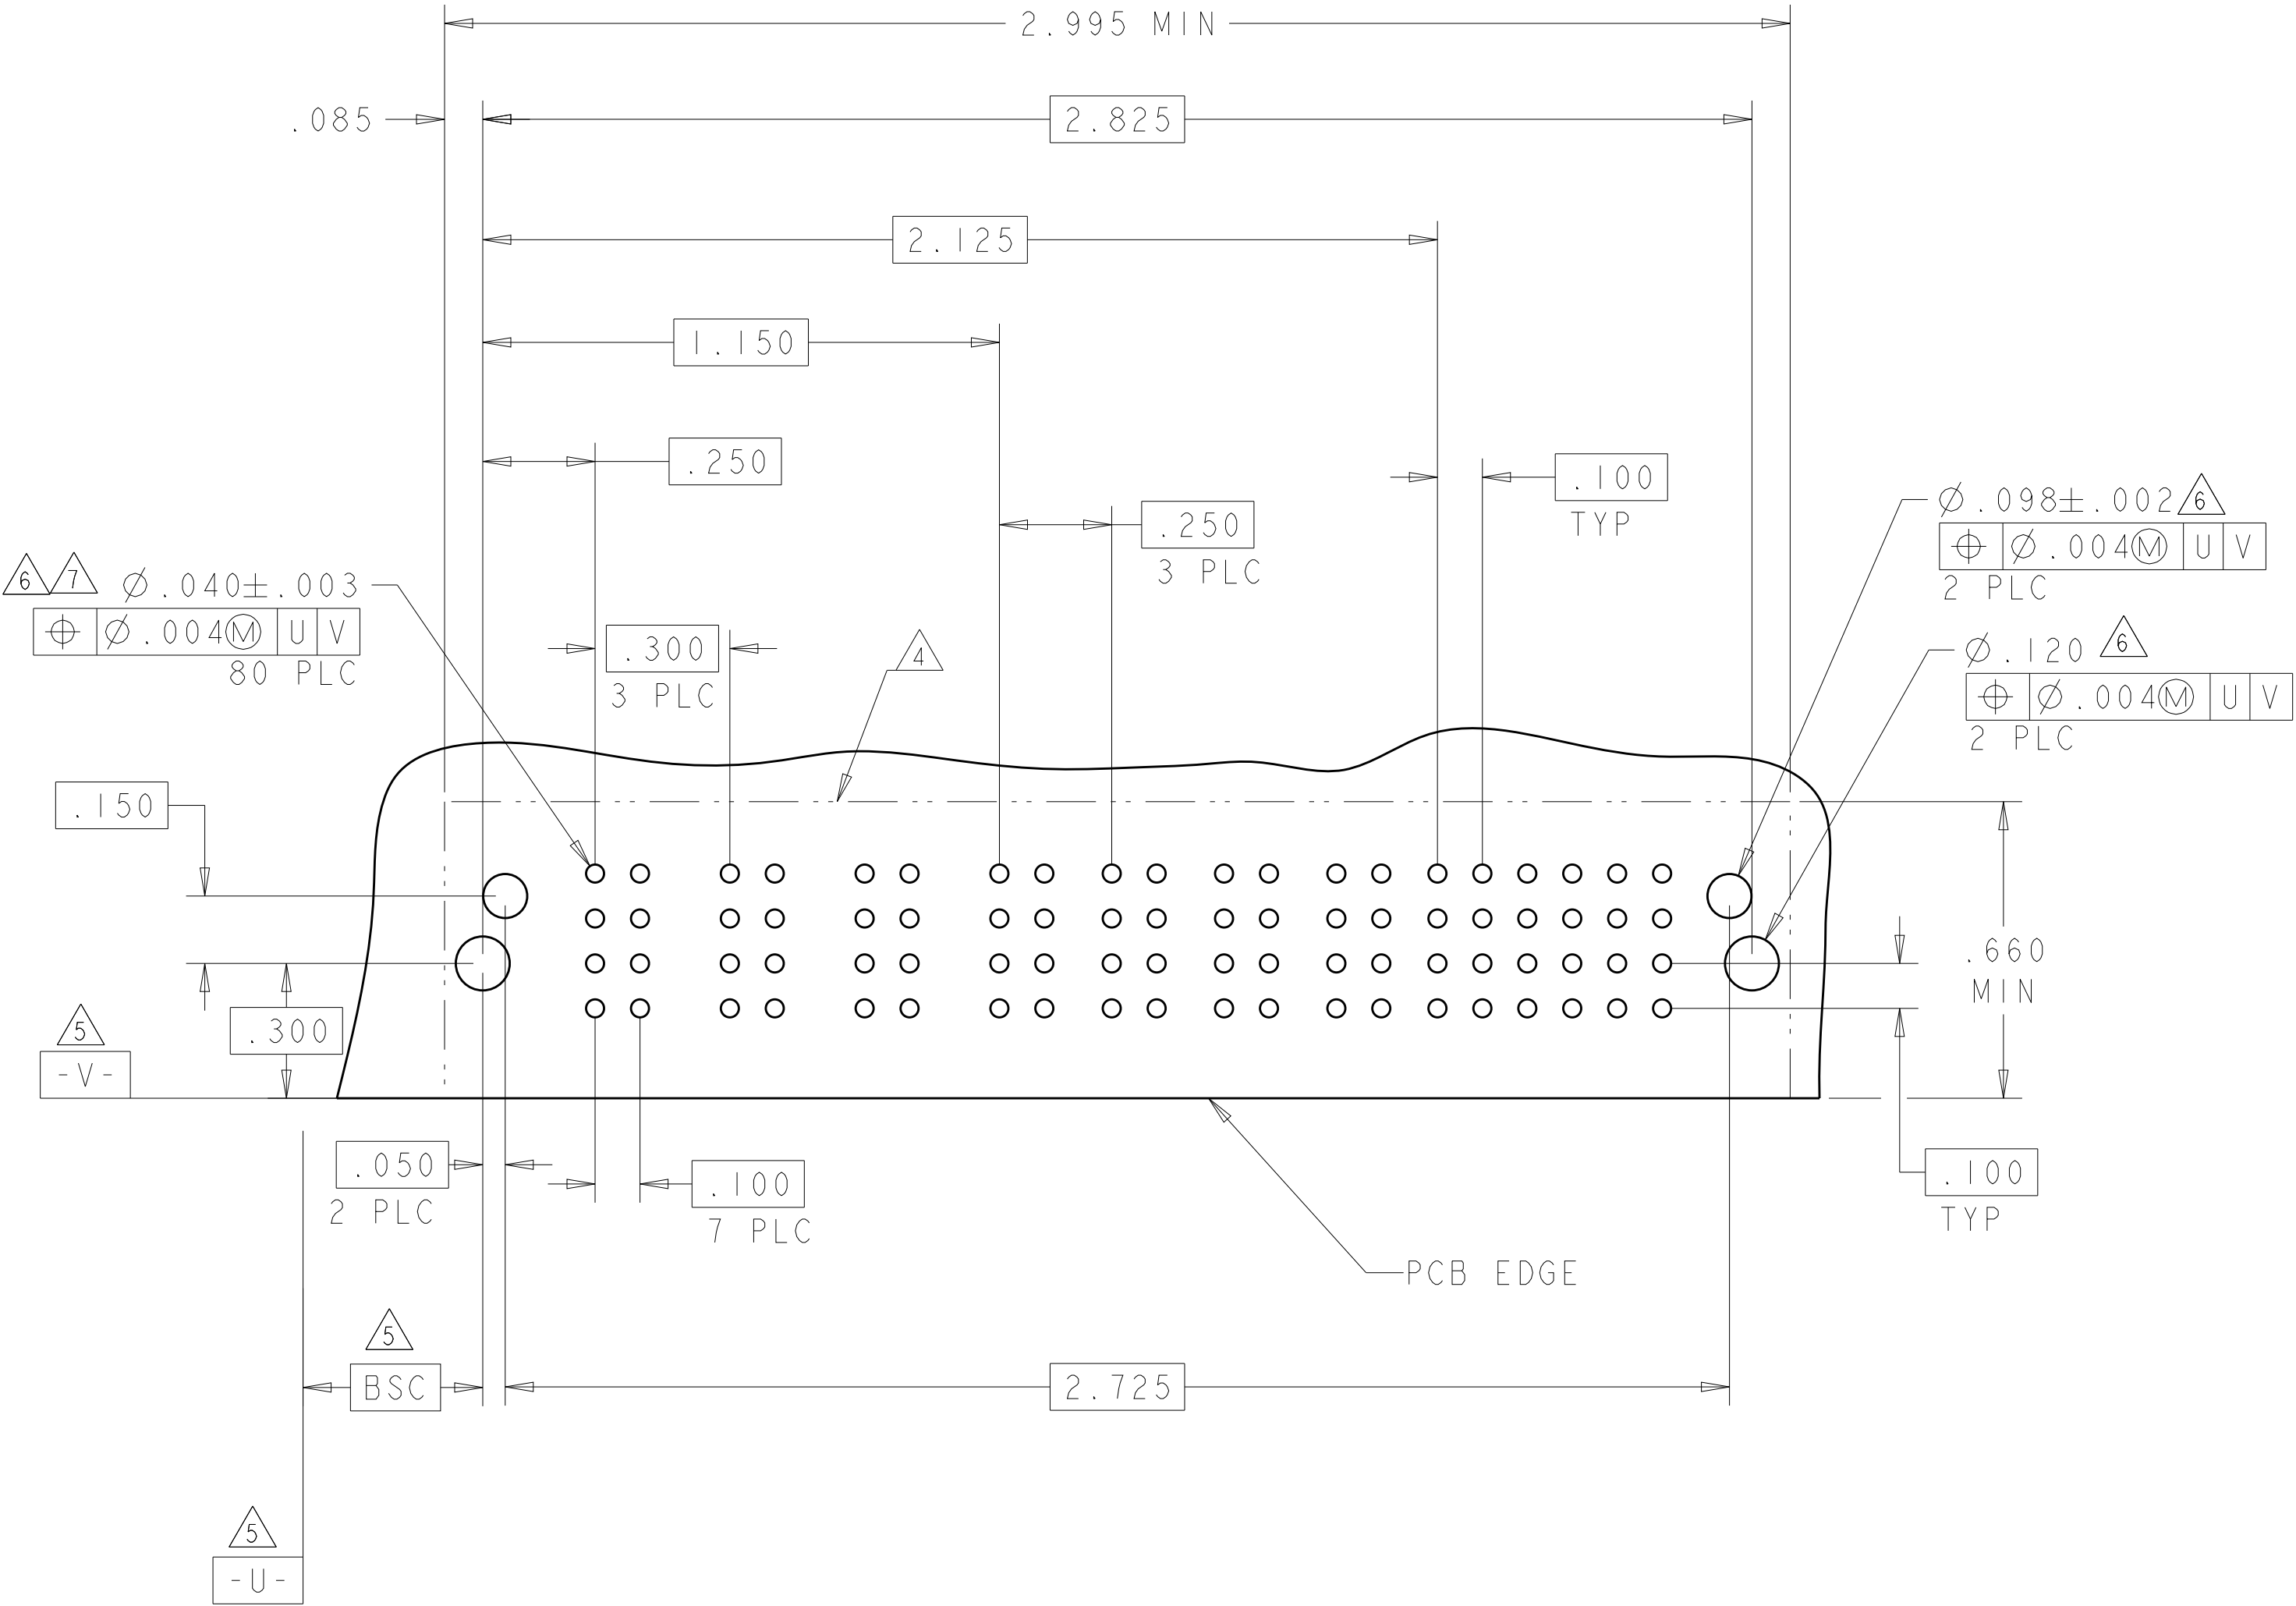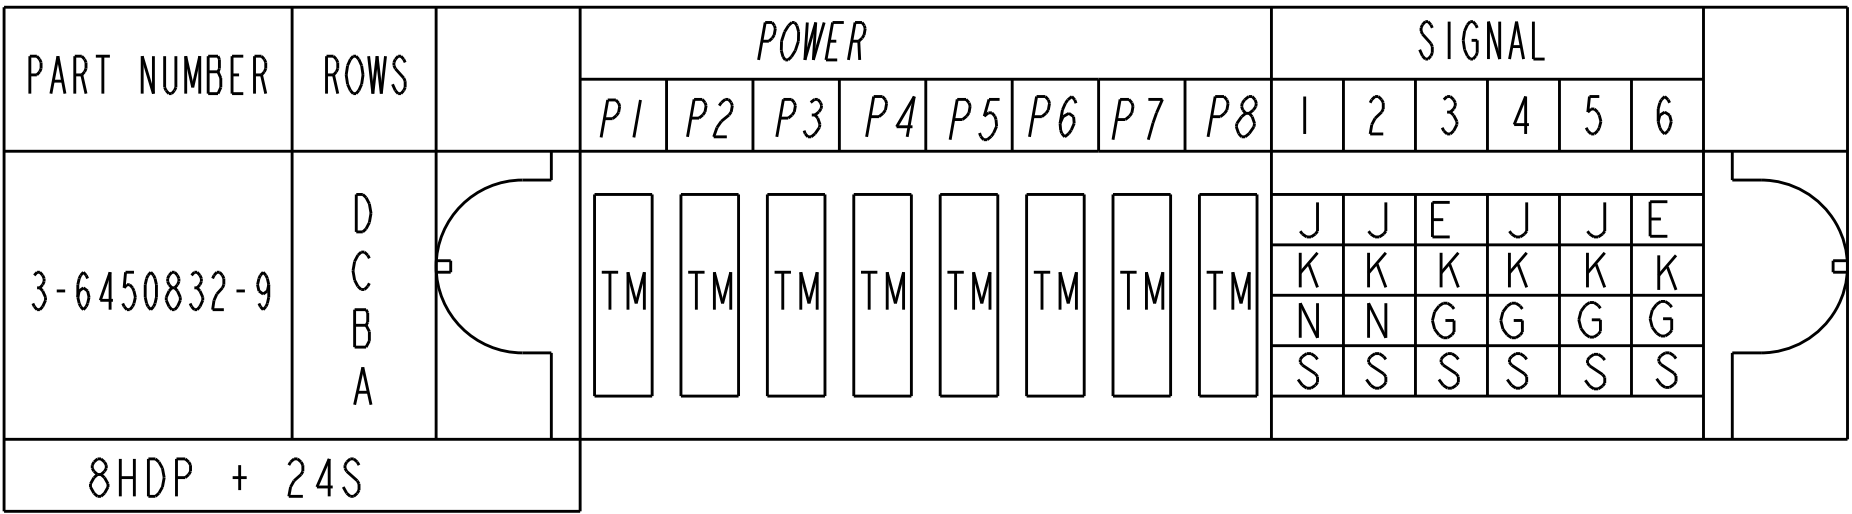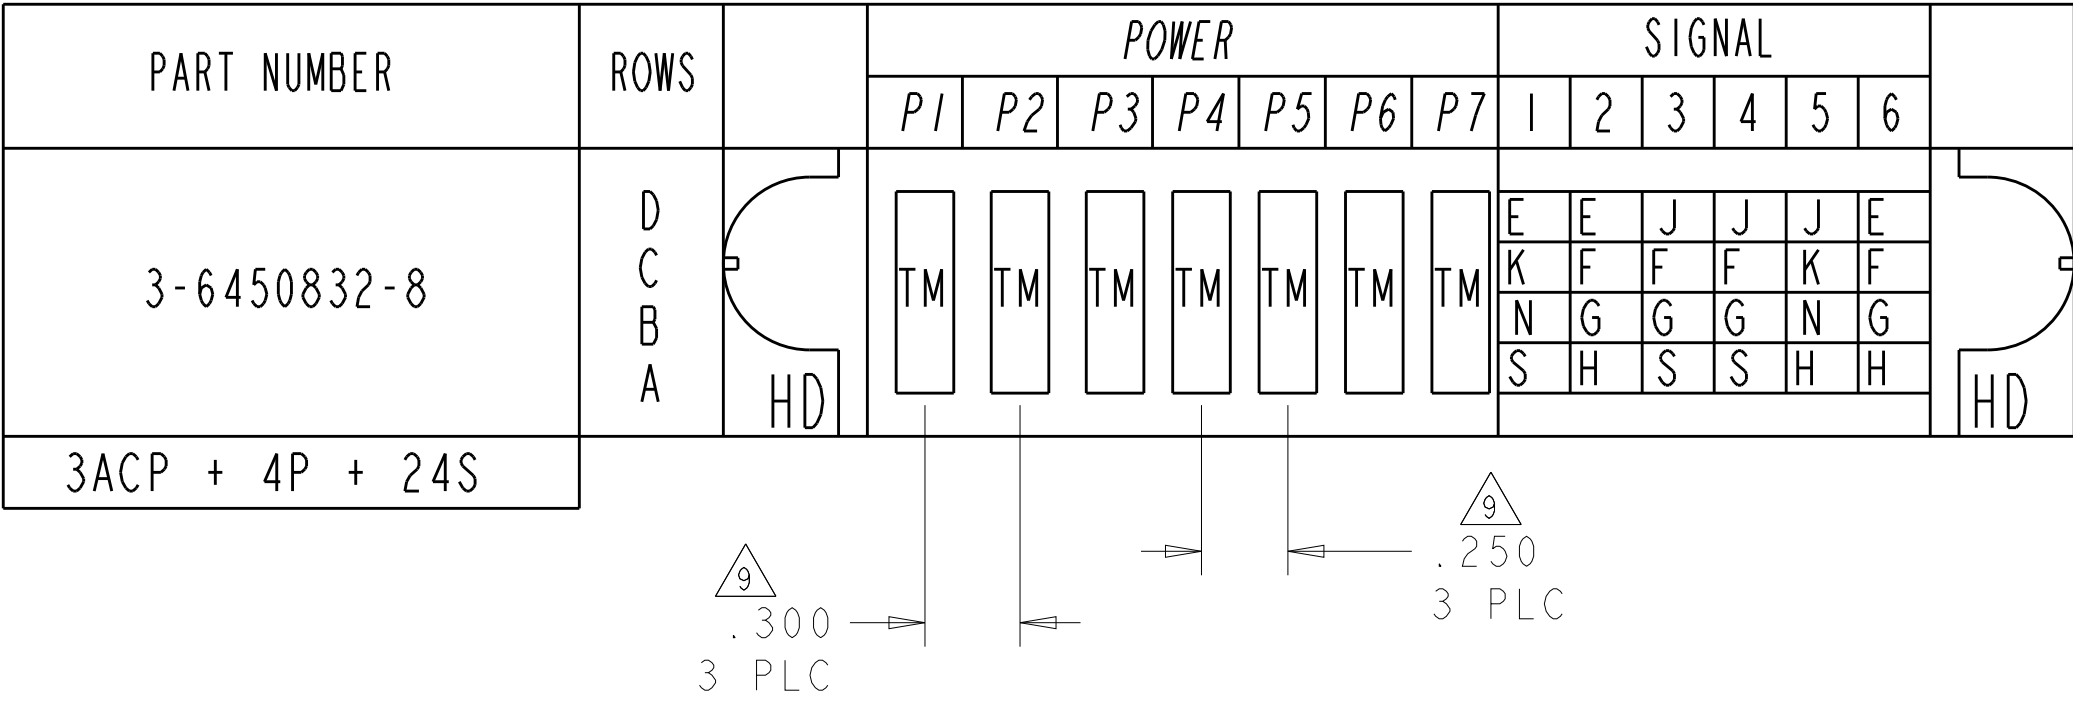

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H.LIU 27MAY2008
CHK S.ZHAO 27MAY2008
APVD S.ZHAO -

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT -

CUSTOMER DRAWING

SCALE 4:1
SHEET 20 OF 24
REV K4


TE Connectivity

R/A HEADER WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE A1
CAGE CODE 00779
DRAWING NO. 6450832

RESTRICTED TO -

PART NUMBER	ROWS		POWER								SIGNAL								
			P1	P2	P3	P4	P5	P6	P7	P8	1	2	3	4	5	6	7	8	
4-6450832-1	D		TM	TM	TM	TM	TM	TM	TM	J	J	J	J	J	J	J	J		
	K									K	K	K	K	K	K	K			
	N									N	N	N	N	N	N	N			
	S									S	S	S	S	S	S	S			
8P + 32S																			

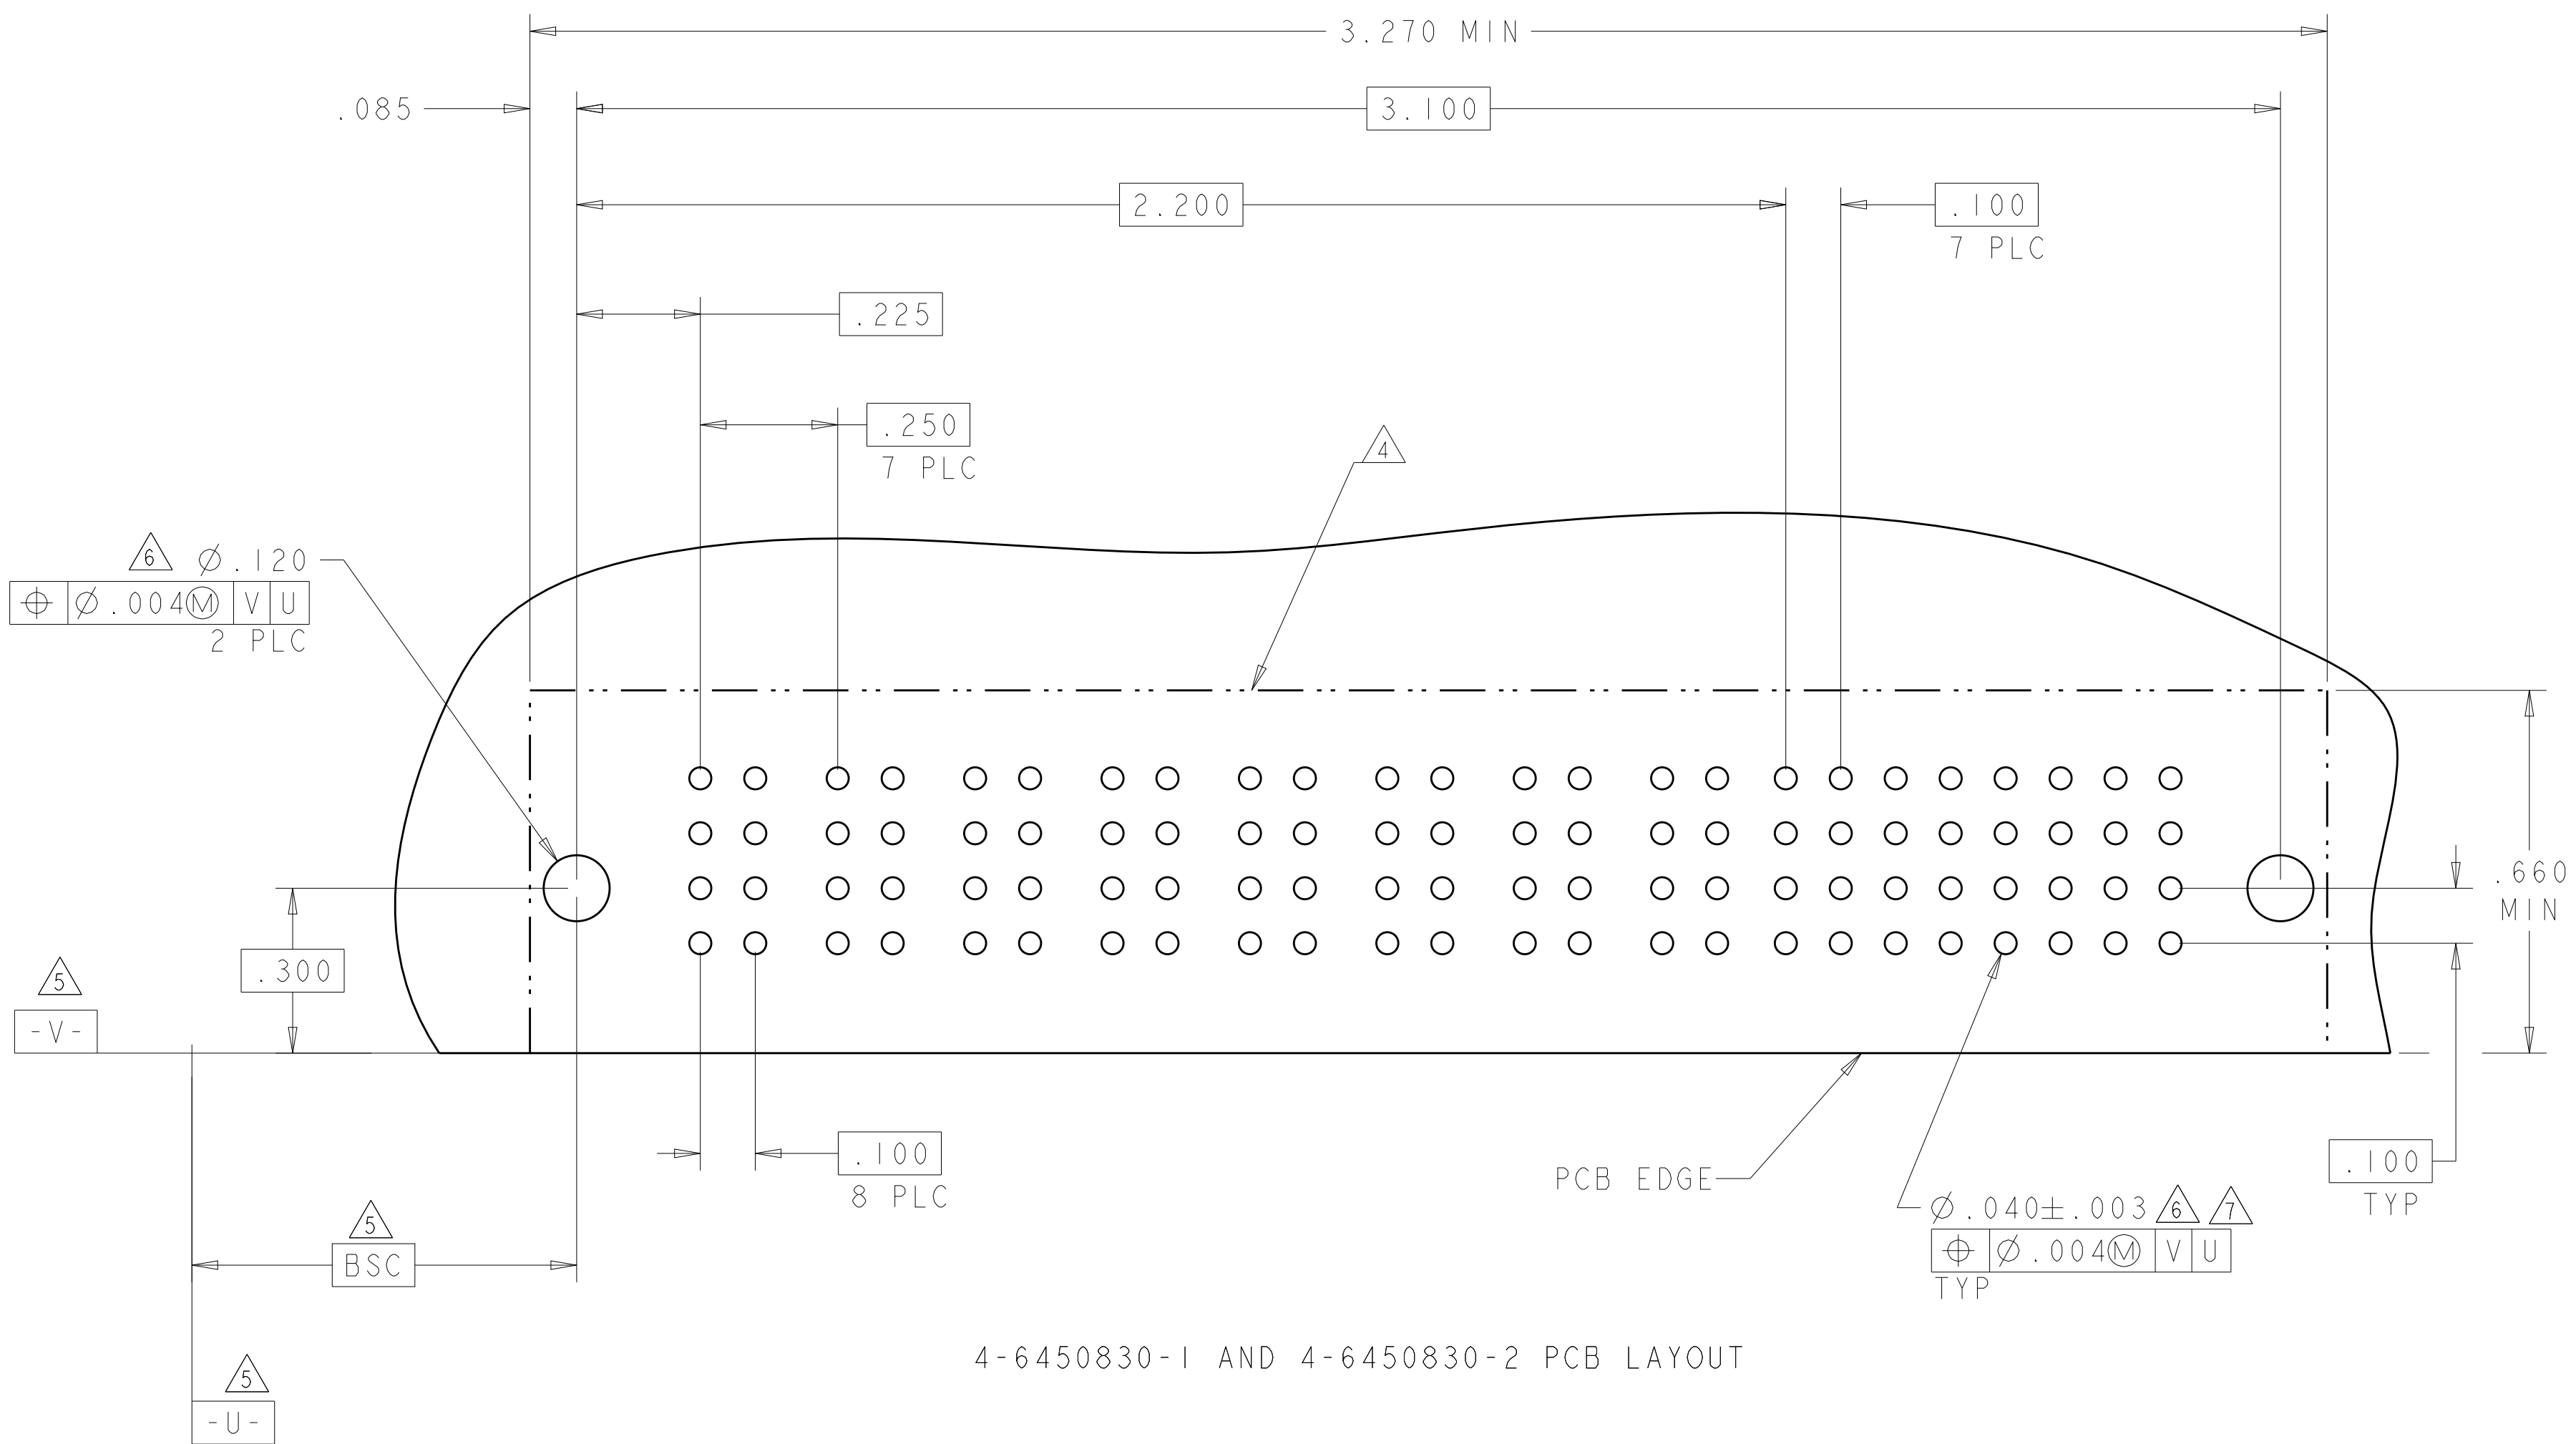[illegible]

4-6450830-1 AND 4-6450830-2 PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.LIU 27MAY2008		 TE Connectivity	
		CHG S.ZHAO 27MAY2008			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME R/A LEADERS WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		APVD S.ZHAO			
		PRODUCT SPEC 108-2292			
		APPLICATION SPEC 114-13251			
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±?		WEIGHT -		SIZE CAGE CODE DRAWING NO. RESTRICTED TO A 100779 ©6450832 -	
MATERIAL FINISH		CUSTOMER DRAWING		SCALE 4:1 SHEET 21 OF 24 REV K4	

PART NUMBER	ROWS		POWER					SIGNAL					
			P1	P2	P3	P4	P5	1	2	3	4	5	
4-6450832-4	D		TM		TM		TM	J	J	J	J	J	
	K							K	K	K	K		
	N							N	N	N	N		
	H							H	S	S	S		
5HDP + 20S													

2.020 MIN

.310

1.025

.100
4 PLC

.400
2 PLC

4

$\varnothing .040 \pm .003$
TYP

$\varnothing .004$

6

V

U

.660
MIN


PCB EDGE


.100
3 PLC


5

BSC


.100
TYP

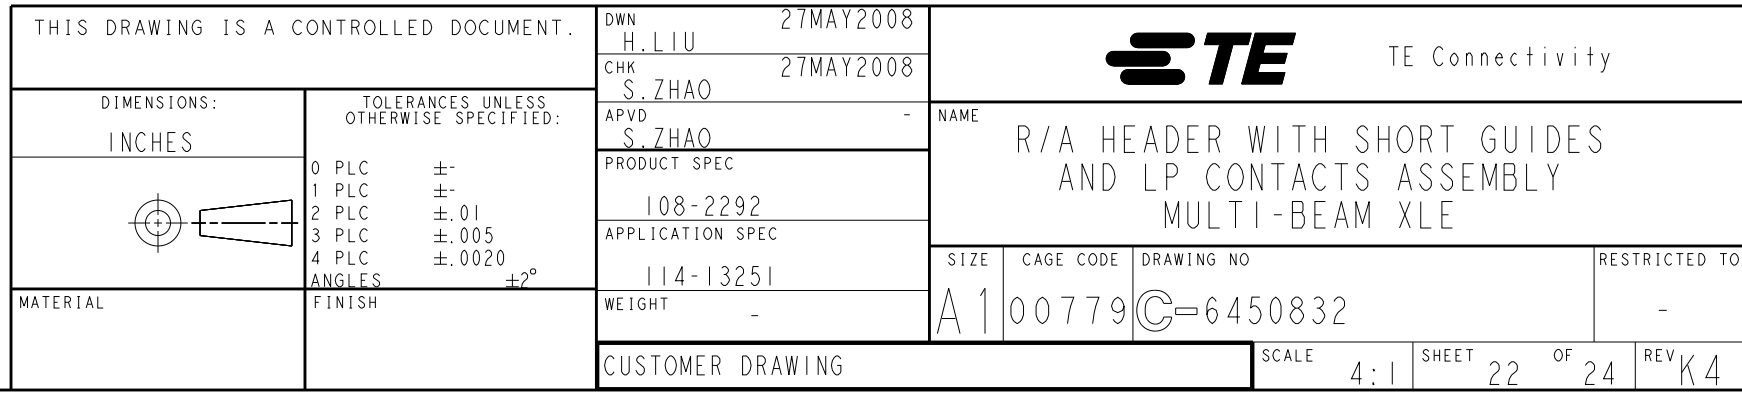

PART NUMBER	ROWS		POWER										SIGNAL					
			P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	1	2	3	4	5	
4-6450832-6	D												J	J	J	J	E	
	K												K	K	K	F		
	N												N	N	N	G		
	S												S	S	S	H		
10HDP + 20S																		

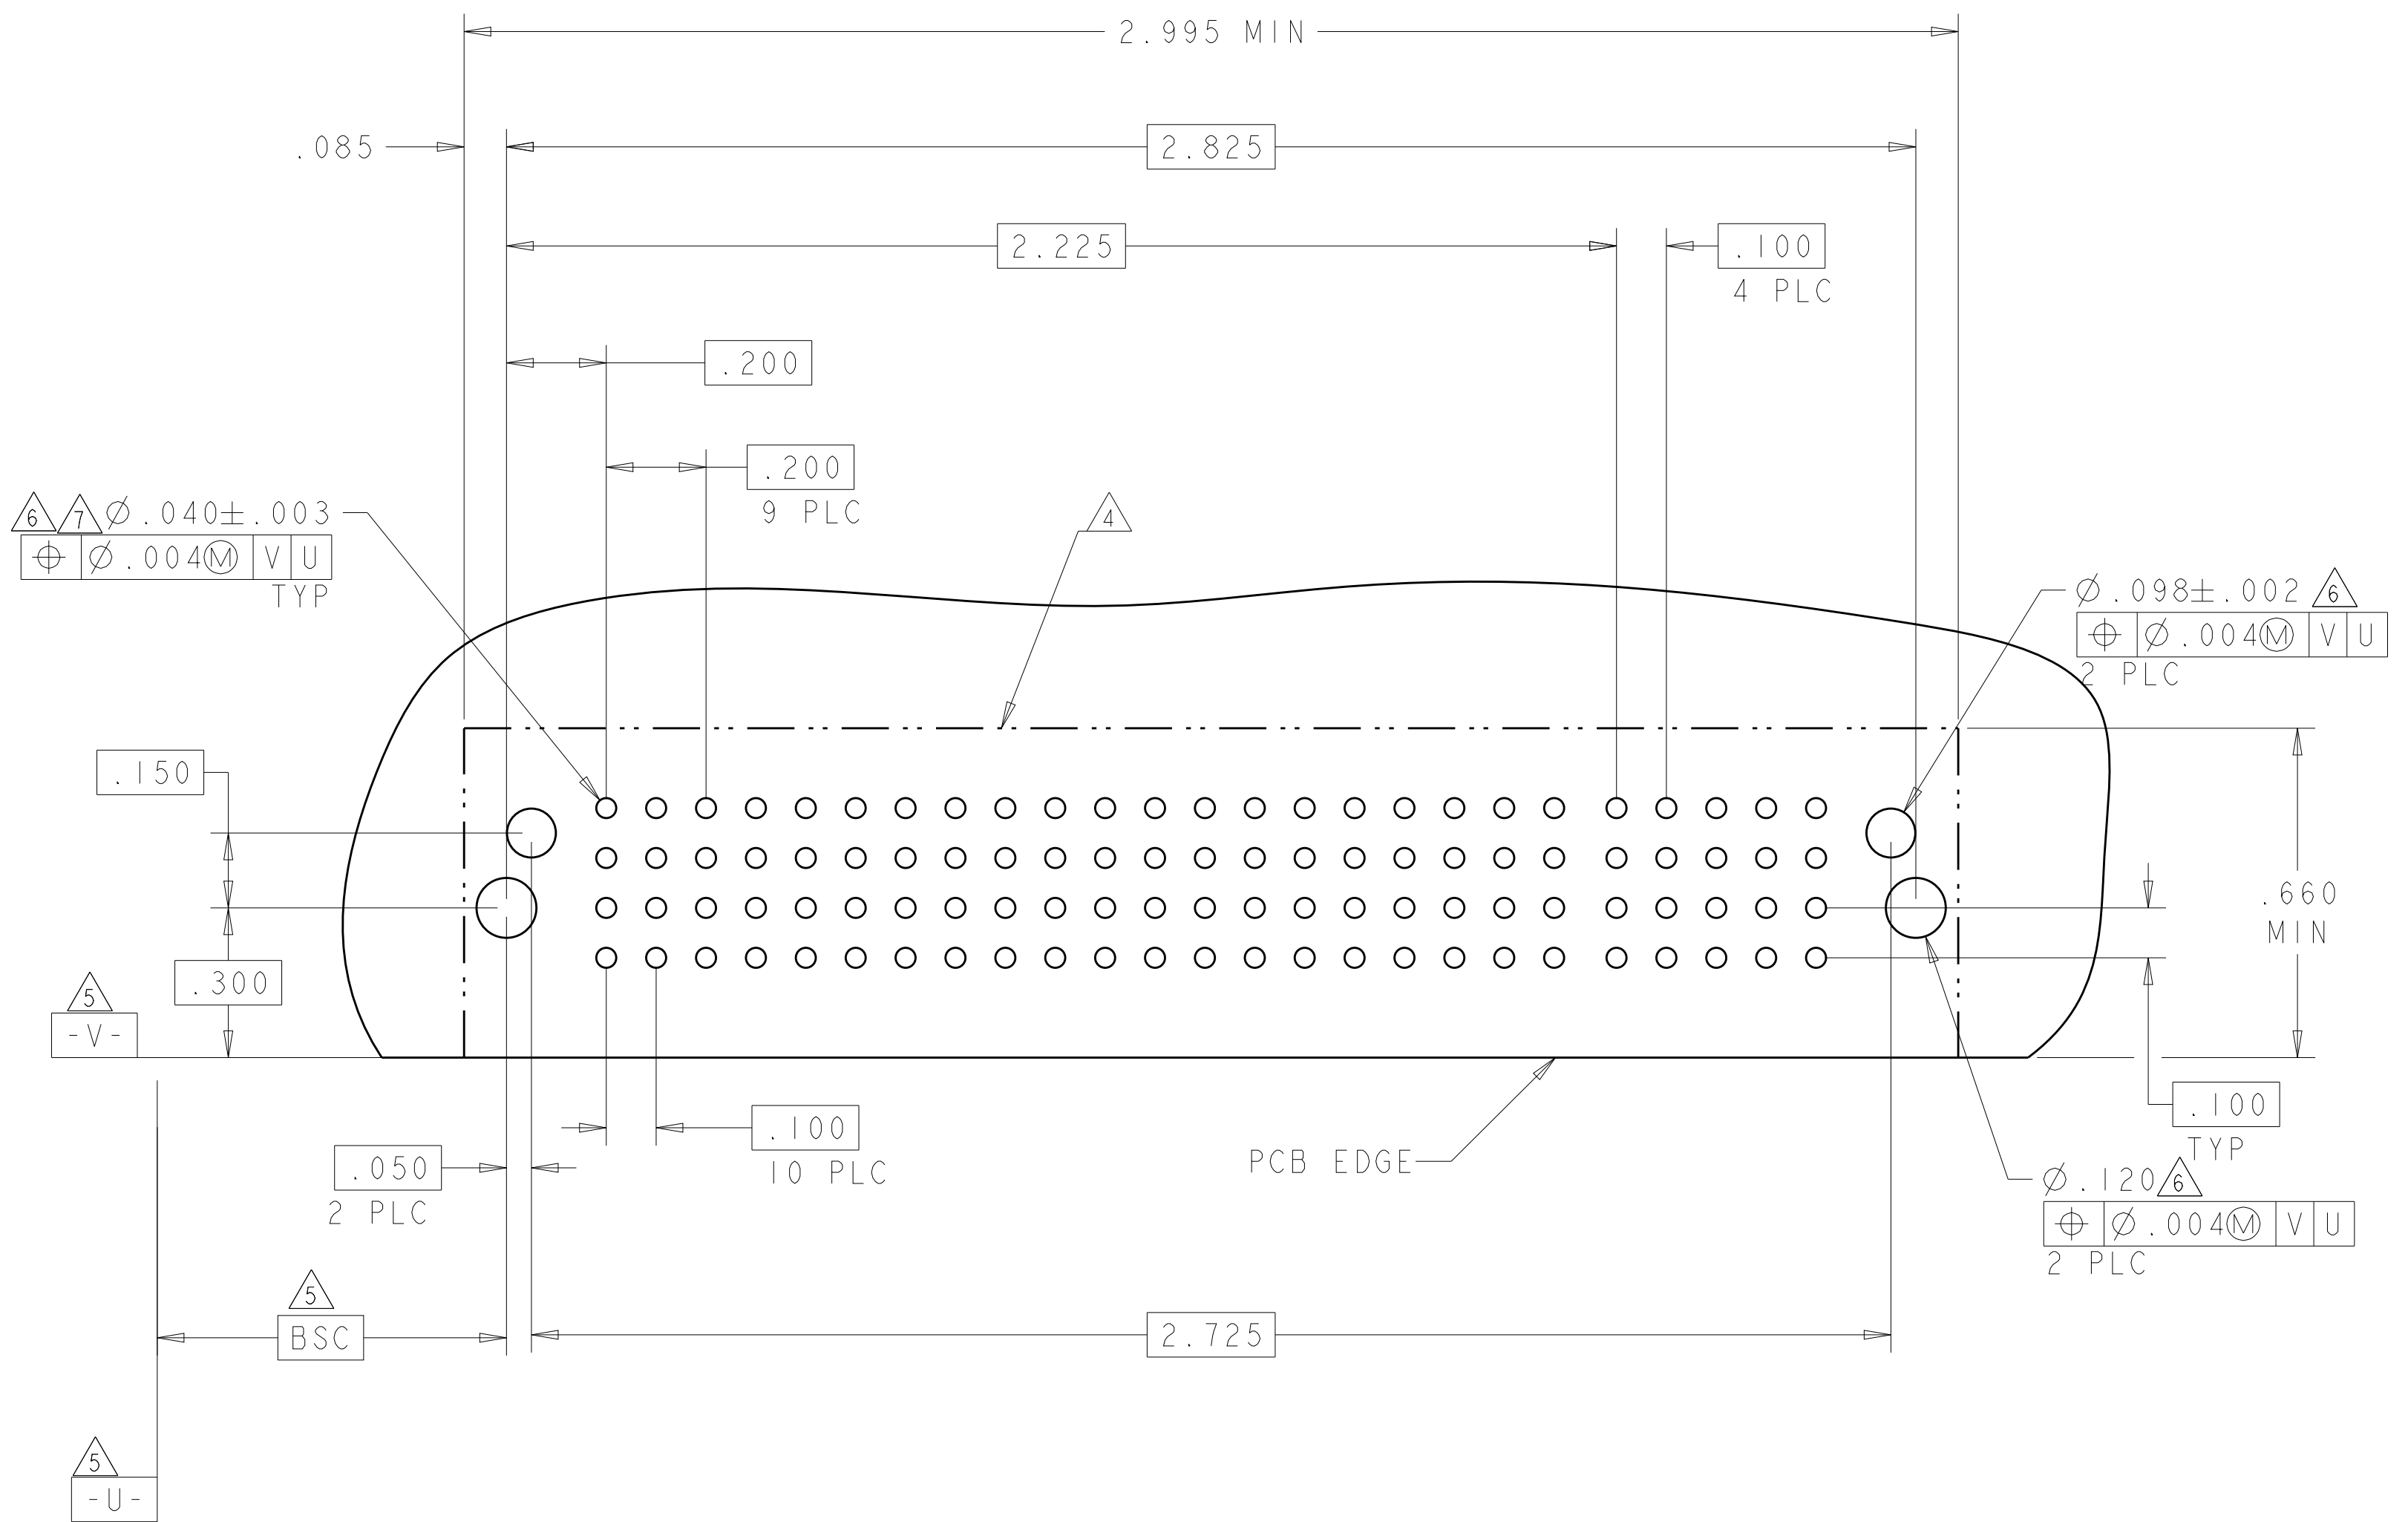4805 (3/11)

- NO CONTACTS LOADED

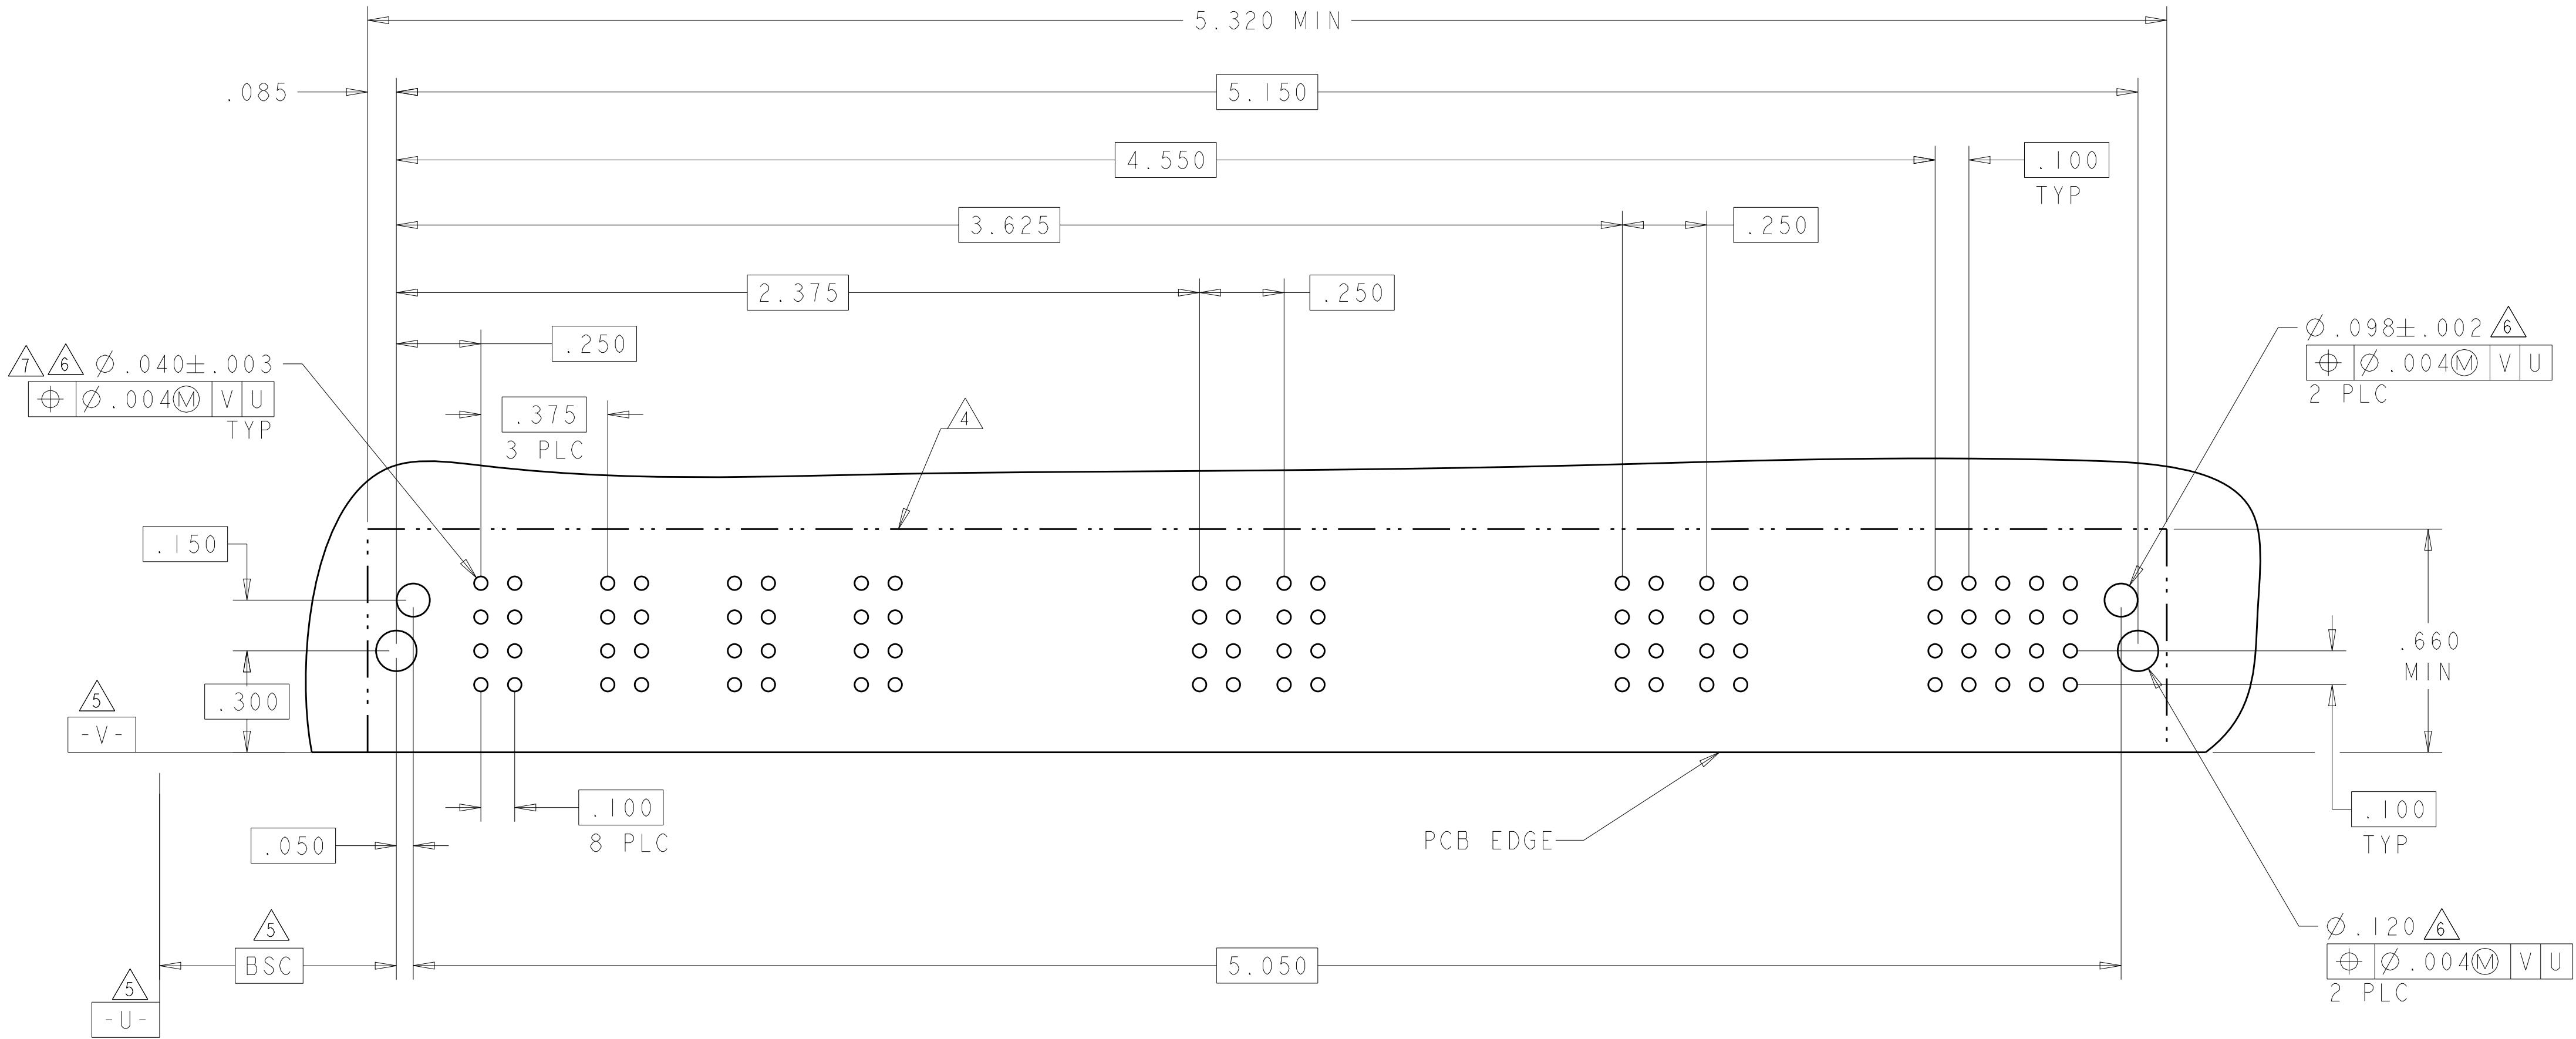4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9