

# ECI motor.

## ECI-42.XX-K1




- Highly dynamic 3-phase internal rotor motor with EC technology
- Low cogging torque
- Robust, noise-optimized ball bearing system for a long service life
- High efficiency and high power density realized in a compact design
- Basic motor with electronic module K1 for operation with external control electronics
- Mechanical design and interfaces designed for modular flexibility
- Protection class IP 40 (higher on request) and connection by wires

Nominal data					
Type		ECI-42.20-K1-B00	ECI-42.20-K1-D00	ECI-42.40-K1-B00	ECI-42.40-K1-D00
Nominal voltage ( $U_n$ )	V DC	24	48	24	48
Nominal speed ( $n_n$ )**	rpm	4 000			
Nominal torque ( $M_n$ )**	mNm	110	110	220	220
Nominal current ( $I_n$ )**	A	2.50	1.30	5.10	2.60
Nominal output power ( $P_n$ )**	W	46	46	92	92
Starting torque ( $M_{max}$ )	mNm	480	480	960	960
Permissible peak current ( $I_{max}$ )***	A	14	7	21	11
Speed at no-load operation ( $n_0$ )	rpm	5 900	5 900	5 700	5 700
No-load current ( $I_0$ )	A	0.33	0.10	0.40	0.20
Permanent stall torque ( $M_{st}$ )	mNm	100	100	200	200
Recommended speed control range	rpm	0 ... 5 000			
Rotor moment of inertia ( $J_r$ )	kgm <sup>2</sup> x10 <sup>-6</sup>	3.42	3.42	6.70	6.70
Motor constant ( $K_E$ )	mVs/rad	40.9	84.2	42.8	83.9
Connection resistance ( $R_v$ )	$\Omega$	0.85	3.20	0.39	1.50
Connection inductance ( $L_v$ )	mH	1.10	4.50	0.50	1.84
Overload protection		To be implemented via the control electronics			
Permissible ambient temperature range ( $T_U$ )	$^{\circ}\text{C}$	0 ... +40			
Weight	kg	0.33	0.33	0.48	0.48
Order no. (wire interface)*	IP 40	932 4220 122	932 4220 123	932 4240 122	932 4240 123
Subject to alterations		* Classification of protection class refers to installed state with sealing on the flange side ** At $T_U$ max. 40 $^{\circ}\text{C}$ *** Permissible time for peak current: max. 1 sec. – to be repeated only after complete cool down			

### Characteristic curve


ECI-42.20, 24 V (at 25 $^{\circ}\text{C}$ )

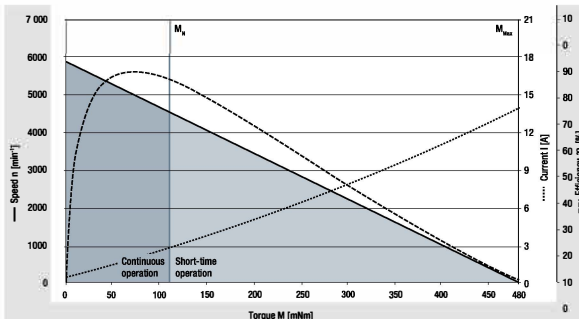

<sup>1)</sup> Nominal data, see table

Characteristic curve 48 V on request

ECI-42.40, 24 V (at 25 $^{\circ}\text{C}$ )

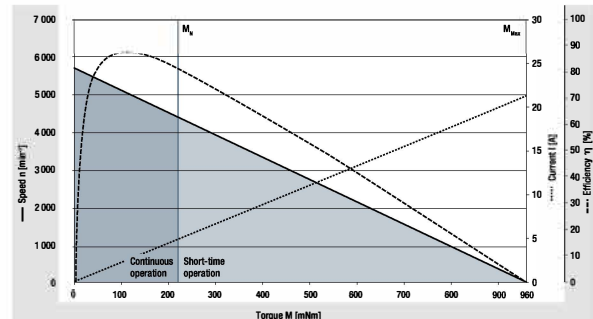


<sup>1)</sup> Nominal data, see table


Characteristic curve 48 V on request

**Technical drawing**

All dimensions in mm

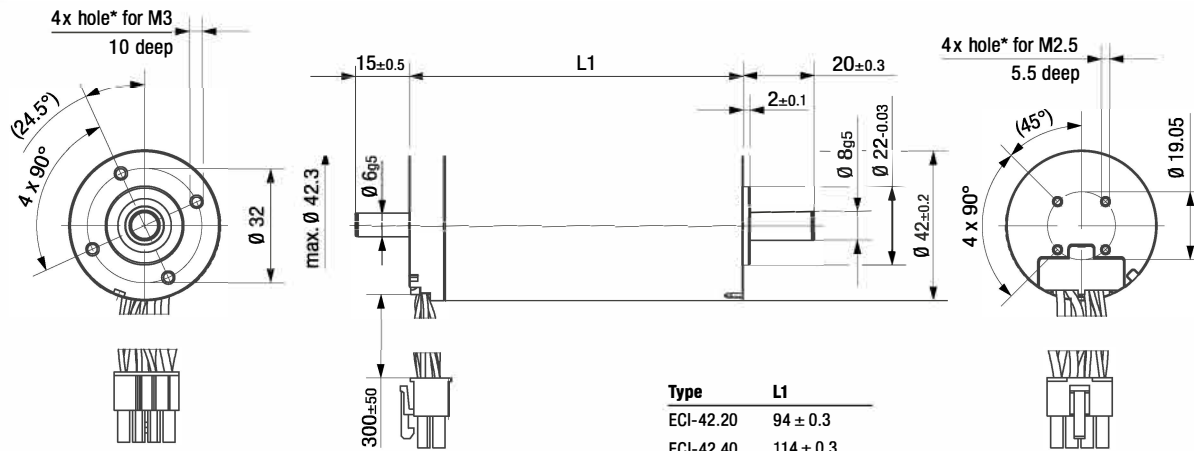

Type	L1
ECI-42.20	94 ± 0.3
ECI-42.40	114 ± 0.3




$F_{radial}$	30 N	Permissible shaft load at nominal speed and life expectancy $L_{10}$ (nominal operation) of 20 000 h (at $T_v$ max. 40°C)
$F_{axial}$	75 N	
$L_1$	20 mm	

\* For thread-rolling screws according to DIN 7500

**Electrical connection**

**Supply wire**

No.	Color	Function
1	yellow	Phase W
5	violet	Phase V
6	brown	Phase U



Molex pin no. 39-01-2085

**Signal wire**

No.	Color	Function
4	green	Hall A
3	white	Hall B
8	gray	Hall C
2	red	$U_b$
7	black	GND

**Modular construction kit**

**Brake system**

Spring-applied brake  
BFK 457-01 (page 76)



**Basic motor**



**Planetary gearheads**

NoiselessPlus 42 (page 50)  
Performax® 42 (page 54)  
Performax®Plus 42 (page 58)



**Encoder system**

Optical incremental encoder  
HEDS 5500 (page 78)



**Recommended external control electronics**

VTD-XX.XX-K3	Speed (page 38)
VTD-XX.XX-K4S	Position (page 40)
VTD-60.13-K5SB	Position (page 42)



**Crown gearheads**

EtaCrown® 52 (page 64)  
EtaCrown®Plus 42 (page 68)



For motor-gearbox combinations, depending on the choice of the single components, the maximum allowable torque (gearbox) can be exceeded or respectively not reached.

# Crown gearheads.

EtaCrown® 52





Image of 2-stage gearhead

- Maximum safety in design and operation, as well as optimal vandalism protection; no automatic lock due to high efficiency of the crown wheel technology
- Space-saving installation due to zero offset axle and symmetrical structure
- Flexible application possibilities with various optional shaft outlets and available shaft geometries
- Wide reduction range by means of upstream / downstream planetary stage
- High radial loads due to double ball bearing in the output shaft

Nominal data		EtaCrown® 52.1			EtaCrown® 52.2			
Gearheads								
Reduction ratio		4.10	6.70	10.1	21.2	33.3	60.0	113
No. of stages		1			2			
Efficiency		0.90			0.81			
Max. input speed (n <sub>i</sub> )	rpm	6 000			6 000			
Rated output torque (M <sub>ab</sub> )	Nm	0.21	0.34	0.52	0.98	1.54	2.77	3.48
Short-term torque (M <sub>max</sub> )	Nm	0.53	0.85	1.30	2.45	3.85	6.93	8.70
Gear play	°	0.55 ... 1.1			0.55 ... 1.1			
Permissible operating temperature (T <sub>v</sub> )	°C	-20 ... +80			-20 ... +80			
Operating mode		S1			S1			
Protection class		IP 50			IP 50			
Weight	kg	0.40			0.65			
Shaft load radial / axial	N	300 / 150	350 / 150	400 / 150	500 / 150	570 / 150	720 / 150	770 / 150
Service life	h	5 000			5 000			
Lubrication		Maintenance-free grease lubrication for life						
Installation position		any						
Subject to alterations		on request						

Technical drawing

Image of 1-stage gearhead with left shaft end (W05) / All dimensions in mm

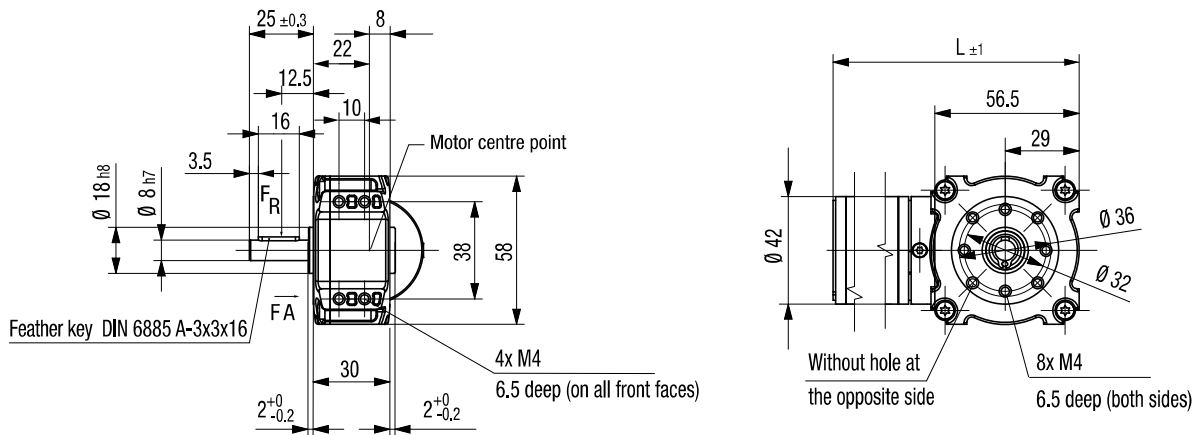

$F_{axial}$  150 N  
 $F_{radial}$  see table  
 $L1$  12.5 mm

Permissible shaft load at nominal speed and life expectancy  $L_{10}$  (nominal operation) and operating factor  $C_b = 1$  (see page 82) of 5 000 h (at  $T_v$  40°C).

Shaft end, right (W05) (standard)	Shaft end, left (W06)	Shaft end, both sides (W07)

Length of the possible motor / gearhead combinations

Motor / gearhead		L - 1-stage	L - 2-stage
ECI-42.20-K1-E52	mm	160	189
ECI-42.40-K1-E52	mm	180	209

Subject to alterations

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9