


# OxiCap® NOM Low ESR Multianodes




## Niobium Oxide Capacitor

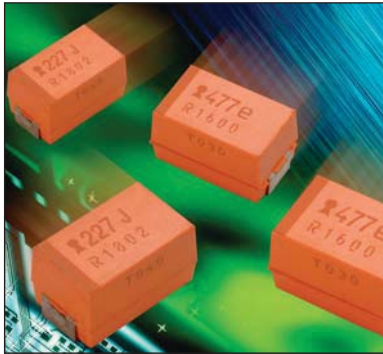

- Multi-anode construction
- Super low ESR
- Non-burn safe technology
- CV range: 220-680µF / 1.8-6.3V
- IBM global approval received in 2004
- Electra award received in 2005



Electra Award  
2005

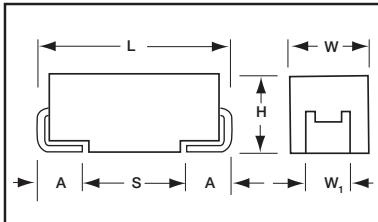

For part marking see page 130

### CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W, ±0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min.       |
|------|----------|------------|----------------|------------------------------|------------------------------|------------------|------------------------------|--------------|
| E    | 2917     | 7343-43    | 7.30 (0.287)   | 4.30 (0.169)                 | 4.10 (0.162)                 | 2.40 (0.094)     | 1.30 (0.051)                 | 4.40 (0.173) |

W<sub>1</sub> dimension applies to the termination width for A dimensional area only.

### HOW TO ORDER

|             |                                     |  |                            |   |   |                  |
|-------------|-------------------------------------|--|----------------------------|---|---|------------------|
| <b>NOM</b>  | <b>E</b>                            | <b>227</b>   | <b>M</b>                   | <b>006</b>  | <b>R</b>  | <b>0040</b>      |
| <b>Type</b> | <b>Case Size</b><br>See table above | <b>Capacitance Code</b><br>1st two digits represent significant figures, 3rd digit represents multiplier in pF | <b>Tolerance</b><br>M=±20% | <b>Rated DC Voltage</b><br>001 = 1.8Vdc<br>002 = 2.5Vdc<br>004 = 4Vdc<br>006 = 6.3Vdc | <b>Packaging</b><br>R = Pure Tin 7" Reel<br>S = Pure Tin 13" Reel | <b>ESR in mΩ</b> |

### TECHNICAL SPECIFICATIONS

|                                    |   |     |     |     |     |
|------------------------------------|---|-----|-----|-----|-----|
| Technical Data:                    | All technical data relate to an ambient temperature of +25°C is not stated  |     |     |     |     |
| Capacitance Range:                 | 220 µF to 680 µF  |     |     |     |     |
| Capacitance Tolerance:             | ±20%  |     |     |     |     |
| Leakage Current DCL:               | 0.02CV  |     |     |     |     |
| Rated Voltage DC (V <sub>R</sub> ) | ≤ +85°C:  | 1.8 | 2.5 | 4   | 6.3 |
| Category Voltage (V <sub>C</sub> ) | ≤ +125°C:   | 0.9 | 1.3 | 2   | 3   |
| Surge Voltage (V <sub>S</sub> )    | ≤ +85°C:  | 2.3 | 3.3 | 5.2 | 8   |
| Surge Voltage (V <sub>S</sub> )    | ≤ +125°C:   | 1.2 | 1.7 | 2.6 | 4   |
| Temperature Range:                 | -55°C to +125°C   |     |     |     |     |
| Reliability:                       | 0.2% per 1000 hours at 85°C, V <sub>R</sub> , 0.1Ω/V series impedance, 60% confidence level<br>Meets requirements of AEC-Q200 |     |     |     |     |



# OxiCap® NOM Low ESR Multianodes



## Niobium Oxide Capacitor

### CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance |      | Rated Voltage DC (V <sub>R</sub> ) to 85°C / 0.66 DC to 105°C / 0.5 DC to 125°C |          |          |          |
|-------------|------|---|----------|----------|----------|
| μF          | Code | 1.8V (x)  | 2.5V (e) | 4.0V (G) | 6.3V (J) |
| 220         | 227  |   |          |          | E(40)    |
| 330         | 337  |   |          | E(35)    | E(23,35) |
| 470         | 477  |   | E(30)    | E(23,30) |          |
| 680         | 687  | E(23)   | E(23)    |          |          |

Available Ratings, (ESR ratings in mOhms in brackets)

Engineering samples - please contact manufacturer

\*Codes under development - subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.



LEAD-FREE

LEAD-FREE COMPATIBLE  
COMPONENT



RoHS  
COMPLIANT



NON-BURN  
NON-SMOKE

### RATINGS & PART NUMBER REFERENCE

| AVX Part No.   | Case Size | Capacitance (μF) | Rated Voltage (V) | DCL (μA) Max. | DF % Max. | ESR Max. (mΩ) @100kHz | MSL | 100kHz RMS Current (A) |       |       | 100kHz RMS Voltage (V) |       |       |
|--|-----------|------------------|-------------------|---------------|-----------|-----------------------|-----|------------------------|-------|-------|------------------------|-------|-------|
|  |           |                  |                   |               |           |                       |     | 25°C                   | 85°C  | 125°C | 25°C                   | 85°C  | 125°C |
| <b>1.8 Volt @ 85°C (1.2 Volt @ 105°C / 0.9 Volt @ 125°C)</b> |           |                  |                   |               |           |                       |     |                        |       |       |                        |       |       |
| NOME687M001#0023   | E         | 680              | 1.8               | 24.5          | 6         | 23                    | 3   | 3.753                  | 3.378 | 1.501 | 0.086                  | 0.078 | 0.035 |
| <b>2.5 Volt @ 85°C (1.7 Volt @ 105°C / 1.3 Volt @ 125°C)</b> |           |                  |                   |               |           |                       |     |                        |       |       |                        |       |       |
| NOME477M002#0030   | E         | 470              | 2.5               | 23.5          | 10        | 30                    | 3   | 3.286                  | 2.958 | 1.315 | 0.099                  | 0.089 | 0.039 |
| NOME687M002#0023   | E         | 680              | 2.5               | 34            | 6         | 23                    | 3   | 3.753                  | 3.378 | 1.501 | 0.086                  | 0.078 | 0.035 |
| <b>4 Volt @ 85°C (2.6 Volt @ 105°C / 2 Volt @ 125°C)</b>     |           |                  |                   |               |           |                       |     |                        |       |       |                        |       |       |
| NOME337M004#0035   | E         | 330              | 4                 | 26.4          | 8         | 35                    | 3   | 3.043                  | 2.738 | 1.217 | 0.106                  | 0.096 | 0.043 |
| NOME477M004#0023   | E         | 470              | 4                 | 37.6          | 6         | 23                    | 3   | 3.753                  | 3.378 | 1.501 | 0.086                  | 0.078 | 0.035 |
| NOME477M004#0030   | E         | 470              | 4                 | 37.6          | 6         | 30                    | 3   | 3.286                  | 2.958 | 1.315 | 0.099                  | 0.089 | 0.039 |
| <b>6.3 Volt @ 85°C (4 Volt @ 105°C / 3 Volt @ 125°C)</b>     |           |                  |                   |               |           |                       |     |                        |       |       |                        |       |       |
| NOME227M006#0040   | E         | 220              | 6.3               | 26.4          | 12        | 40                    | 3   | 2.846                  | 2.561 | 1.138 | 0.114                  | 0.102 | 0.046 |
| NOME337M006#0023   | E         | 330              | 6.3               | 39.6          | 6         | 23                    | 3   | 3.753                  | 3.378 | 1.501 | 0.086                  | 0.078 | 0.035 |
| NOME337M006#0035   | E         | 330              | 6.3               | 39.6          | 6         | 35                    | 3   | 3.043                  | 2.738 | 1.217 | 0.106                  | 0.096 | 0.043 |

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

ESR allowed to move up to 125 times catalog limit post mounting.

For typical weight and composition see page 123.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9