

# RADIAL LEADS

## SkyCap®/SR Series



### GENERAL INFORMATION

#### AVX SR Series


#### Conformally Coated Radial Leaded MLC

Temperature Coefficients: C0G (NP0), X7R, Z5U

200, 100, 50 Volts (300V, 400V & 500V also available)

Case Material: Epoxy

Lead Material: RoHS Compliant, 100% Tin

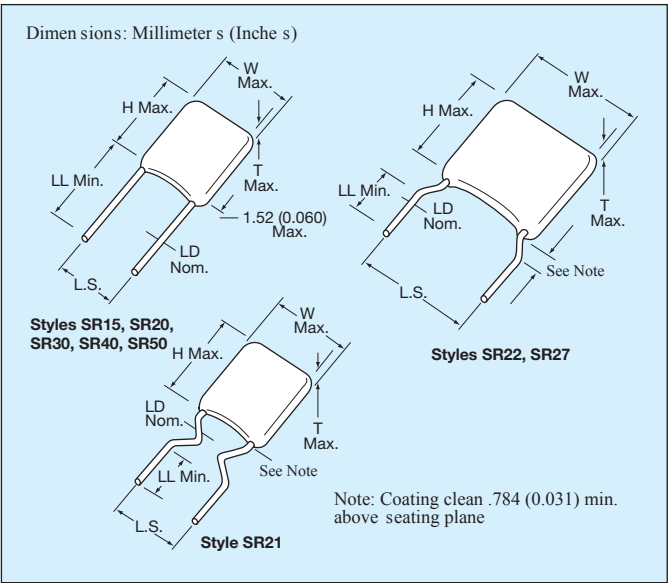

### HOW TO ORDER

SR21

5

E

104

M

A

R

TR1

#### AVX Style

SR15  
SR20  
SR21  
SR22  
SR27  
SR30  
SR40  
SR50

#### Voltage

5 = 50V  
1 = 100V  
2 = 200V  
9 = 300V  
8 = 400V  
7 = 500V

#### Temperature Coefficient

A = C0G (NP0)  
C = X7R  
E = Z5U

#### Capacitance

First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.)

#### Capacitance Tolerance

C0G (NP0):  
C =  $\pm 0.25\text{pF}$   
D =  $\pm 0.5\text{pF}$   
F =  $\pm 1\%$  ( $>50\text{pF}$  only)  
G =  $\pm 2\%$  ( $>25\text{pF}$  only)  
J =  $\pm 5\%$   
K =  $\pm 10\%$   
X7R:  
J =  $\pm 5\%$   
K =  $\pm 10\%$   
M =  $\pm 20\%$   
Z5U:  
M =  $\pm 20\%$   
Z =  $+80\%$  -20%

#### Failure Rate

A = Not Applicable

#### Leads

R = RoHS

#### Packaging


Blank: Bulk Packaging 1.0" minimum of lead length  
T: Trimmed leads .230"  $\pm$  .030"  
Bulk packaging  
TR1: Tape and Reel Packaging  
AP1: Ammopack packaging

See packaging specification pages 33-34




### MARKING

#### FRONT



#### BACK



### PACKAGING REQUIREMENTS

|                          | Quantity per Bag |
|--------------------------|------------------|
| SR15, 20, 21, 22, 27, 30 | 1000 Pieces      |
| SR40, 50                 | 500 Pieces       |

Note: SR15, SR20, SR21, SR30, and SR40 available on tape and reel per EIA specifications RS-468. See Pages 33 and 34.



# RADIAL LEADS

## COG (NP0) Dielectric

### SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

| AVX Style            | SR15                                 | SR20            | SR21            | SR22            | SR27            | SR30           | SR40            | SR50            |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
|----------------------|--------------------------------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------------|-----|----|------|-----|----|------|-----|----|------|----|-----|------|-----|----|
| AVX “Insertable”     | SR07                                 | SR29            | SR59            | N/A             | N/A             | SR65           | SR75            | N/A             |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| Width (W)            | 3.81<br>(.150)                       | 5.08<br>(.200)  | 5.08<br>(.200)  | 5.08<br>(.200)  | 6.604<br>(.260) | 7.62<br>(.300) | 10.16<br>(.400) | 12.70<br>(.500) |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| Height (H)           | 3.81<br>(.150)                       | 5.08<br>(.200)  | 5.08<br>(.200)  | 5.08<br>(.200)  | 6.35<br>(.250)  | 7.62<br>(.300) | 10.16<br>(.400) | 12.70<br>(.500) |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| Thickness (T)        | 2.54<br>(.100)                       | 3.175<br>(.125) | 3.175<br>(.125) | 3.175<br>(.125) | 4.06<br>(.160)  | 3.81<br>(.150) | 3.81<br>(.150)  | 5.08<br>(.200)  |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| Lead Spacing (L.S.)  | 2.54<br>(.100)                       | 2.54<br>(.100)  | 5.08<br>(.200)  | 6.35<br>(.250)  | 7.62<br>(.300)  | 5.08<br>(.200) | 5.08<br>(.200)  | 10.16<br>(.400) |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| Lead Diameter (L.D.) | .508<br>(.020)                       | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020) | .508<br>(.020)  | .635<br>(.025)  |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| Cap. in.*<br>pF      | Industry Preferred<br>Values in Blue | WVDC            |                 |                 | WVDC            |                |                 | WVDC            |     |    | WVDC |     |    | WVDC |     |    | WVDC |    |     | WVDC |     |    |
|                      |                                      | 200             | 100             | 50              | 200             | 100            | 50              | 200             | 100 | 50 | 200  | 100 | 50 | 200  | 100 | 50 | 100  | 50 | 100 | 50   | 100 | 50 |
| 1.0-9.9              | SR151A1R0DAR                         |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 10                   | SR151A100KAR                         |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 15                   | SR....A150KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 22                   | SR....A220KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 33                   | SR....A330KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 39                   | SR....A390KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 47                   | SR....A470KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 68                   | SR....A680KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 100                  | SR151A101KAR                         |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 150                  | SR....A151KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 220                  | SR....A221KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 330                  | SR....A331KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 390                  | SR....A391KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 470                  | SR....A471KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 680                  | SR....A681KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 1000                 | SR211A102KAR                         |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 1500                 | SR....A152KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 2200                 | SR....A222KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 3900                 | SR....A392KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 4700                 | SR....A472KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 6800                 | SR....A682KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 8200                 | SR....A822KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 10,000               | SR....A103KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 15,000               | SR....A153KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 22,000               | SR....A223KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 33,000               | SR....A333KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 39,000               | SR....A393KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 47,000               | SR....A473KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 68,000               | SR....A683KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |
| 100,000              | SR....A104KAR                        |                 |                 |                 |                 |                |                 |                 |     |    |      |     |    |      |     |    |      |    |     |      |     |    |

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

\*Other capacitance values available upon special request.

 = Industry preferred values  
 = SR20 only

Capacitance ranges available for SR12 and SR07 same as SR15  
 SR62 and SR59 same as SR21  
 SR64 and SR65 same as SR30  
 SR75 same as SR40  
 SR13 same as SR21

**NOTE:** For others voltages, tolerances, electrical specifications and NPO typical characteristics, see the AVX Multilayer Ceramic Leaded Capacitors Catalog.

RADIAL LEADS

X7R Dielectric



SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

|                 | AVX Style                            | SR15           | SR20            | SR21            | SR22            | SR27            | SR30           | SR40            | SR50            |
|-----------------|--------------------------------------|----------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------------|
|                 | AVX "Insertable"                     | SR07           | SR29            | SR59            | N/A             | N/A             | SR65           | SR75            | N/A             |
|                 | Width (W)                            | 3.81<br>(.150) | 5.08<br>(.200)  | 5.08<br>(.200)  | 5.08<br>(.200)  | 6.604<br>(.260) | 7.62<br>(.300) | 10.16<br>(.400) | 12.70<br>(.500) |
|                 | Height (H)                           | 3.81<br>(.150) | 5.08<br>(.200)  | 5.08<br>(.200)  | 5.08<br>(.200)  | 6.35<br>(.250)  | 7.62<br>(.300) | 10.16<br>(.400) | 12.70<br>(.500) |
|                 | Thickness (T)                        | 2.54<br>(.100) | 3.175<br>(.125) | 3.175<br>(.125) | 3.175<br>(.125) | 4.06<br>(.160)  | 3.81<br>(.150) | 3.81<br>(.150)  | 5.08<br>(.200)  |
|                 | Lead Spacing (L.S.)                  | 2.54<br>(.100) | 2.54<br>(.100)  | 5.08<br>(.200)  | 6.35<br>(.250)  | 7.62<br>(.300)  | 5.08<br>(.200) | 5.08<br>(.200)  | 10.16<br>(.400) |
|                 | Lead Diameter (L.D.)                 | .508<br>(.020) | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020) | .508<br>(.020)  | .635<br>(.025)  |
| Cap. in.*<br>pF | Industry Preferred<br>Values in Blue | WVDC           | WVDC            | WVDC            | WVDC            | WVDC            | WVDC           | WVDC            | WVDC            |
|                 |                                      | 200 100 50     | 200 100 50      | 200 100 50      | 200 100 50      | 200 100 50      | 200 100 50     | 200 100 50      | 200 100 50      |
| 470             | SR____C471KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 1000            | SR155C102KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 1500            | SR____C152KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 2200            | SR____C222KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 3300            | SR____C332KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 4700            | SR____C472KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 6800            | SR____C682KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 10,000          | SR215C103KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 15,000          | SR____C153KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 22,000          | SR____C223KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 33,000          | SR____C333KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 47,000          | SR____C473KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 68,000          | SR____C683KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 100,000         | SR215C104KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 150,000         | SR____C154KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 220,000         | SR215C224KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 330,000         | SR____C334KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 390,000         | SR____C394KAR                        |                |                 |                 |                 |                 |                |                 |                 |
| 470,000         | SR305C474KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 1.0 uF          | SR305C105KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 2.2 uF          | SR405C225KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 2.7 uF          | SR505C275KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 4.7 uF          | SR505C475KAR                         |                |                 |                 |                 |                 |                |                 |                 |
| 10.0 uF         | SR655C106KAR                         |                |                 |                 |                 |                 |                |                 |                 |

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

- = Industry preferred values
- = Extended range
- = Extended range with 0.150" thickness maximum

# RADIAL LEADS

## Z5U Dielectric

### SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

| AVX Style               | SR15                                 | SR20            | SR21            | SR22            | SR27            | SR30           | SR40            | SR50            |    |      |    |      |    |      |    |      |    |
|-------------------------|--------------------------------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------------|----|------|----|------|----|------|----|------|----|
| AVX “Insertable”        | SR07                                 | SR29            | SR59            | N/A             | N/A             | SR65           | SR75            | N/A             |    |      |    |      |    |      |    |      |    |
| Width<br>(W)            | 3.81<br>(.150)                       | 5.08<br>(.200)  | 5.08<br>(.200)  | 5.08<br>(.200)  | 6.604<br>(.260) | 7.62<br>(.300) | 10.16<br>(.400) | 12.70<br>(.500) |    |      |    |      |    |      |    |      |    |
| Height<br>(H)           | 3.81<br>(.150)                       | 5.08<br>(.200)  | 5.08<br>(.200)  | 5.08<br>(.200)  | 6.35<br>(.250)  | 7.62<br>(.300) | 10.16<br>(.400) | 12.70<br>(.500) |    |      |    |      |    |      |    |      |    |
| Thickness<br>(T)        | 2.54<br>(.100)                       | 3.175<br>(.125) | 3.175<br>(.125) | 3.175<br>(.125) | 4.06<br>(.160)  | 3.81<br>(.150) | 3.81<br>(.150)  | 5.08<br>(.200)  |    |      |    |      |    |      |    |      |    |
| Lead Spacing<br>(L.S.)  | 2.54<br>(.100)                       | 2.54<br>(.100)  | 5.08<br>(.200)  | 6.35<br>(.250)  | 7.62<br>(.300)  | 5.08<br>(.200) | 5.08<br>(.200)  | 10.16<br>(.400) |    |      |    |      |    |      |    |      |    |
| Lead Diameter<br>(L.D.) | .508<br>(.020)                       | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020)  | .508<br>(.020) | .508<br>(.020)  | .635<br>(.025)  |    |      |    |      |    |      |    |      |    |
| Cap. in.*<br>pF         | Industry Preferred<br>Values in Blue | WVDC            |                 | WVDC            |                 | WVDC           |                 | WVDC            |    | WVDC |    | WVDC |    | WVDC |    | WVDC |    |
|                         |                                      | 100             | 50              | 100             | 50              | 100            | 50              | 100             | 50 | 100  | 50 | 100  | 50 | 100  | 50 | 100  | 50 |
| 10,000                  | SR155E103ZAR                         |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 47,000                  | SR.....E473ZAR                       |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 100,000                 | SR215E104ZAR                         |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 150,000                 | SR.....E154ZAR                       |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 220,000                 | SR215E224ZAR                         |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 330,000                 | SR215E334ZAR                         |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 470,000                 | SR215E474ZAR                         |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 680,000                 | SR.....E684ZAR                       |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 1.0 µF                  | SR.....105ZAR                        |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 1.5 µF                  | SR30E155ZAR                          |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 2.2 µF                  | SR30E225ZAR                          |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 3.3 µF                  | SR30E335ZAR                          |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |
| 4.7 µF                  | SR30E475ZAR                          |                 |                 |                 |                 |                |                 |                 |    |      |    |      |    |      |    |      |    |

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

\*Other capacitance values available upon special request.

 = Industry preferred values  
 = SR20 only

Capacitance ranges available for SR12 and SR07 same as SR15  
SR62 and SR59 same as SR21  
SR64 and SR65 same as SR30  
SR75 same as SR40  
SR13 same as SR21

**NOTE:** For others voltages, tolerances, electrical specifications and NPO typical characteristics, see the AVX Multilayer Ceramic Leaded Capacitors Catalog.

### AVX 500 VOLT SKYCAPS\*\*

| STYLE*               | MAXIMUM CAPACITANCE VALUE |         |
|----------------------|---------------------------|---------|
|                      | C0G (NPO)                 | X7R     |
| SR29                 | 900 pF                    | .015 µF |
| SR20                 | 1800 pF                   | .033 µF |
| SR28<br>SR59         | 900 pF                    | .015 µF |
| SR13<br>SR21         | 1800 pF                   | .033 µF |
| SR30<br>SR61<br>SR65 | 7200 pF                   | .12 µF  |
| SR40<br>SR75         | .015 µF                   | .27 µF  |
| SR22                 | 1800 pF                   | .033 µF |
| SR27                 | 1800 pF                   | .033 µF |
| SR76                 | .015 µF                   | .27 µF  |

\*Consult pages 27 and 28 for style sizes.

\*\*Voltage rating based on DWV of 150% of rated voltage.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9