




720 TFX-i Series Sealed and Rugged Keypads

These tough, water resistant keypads feature moving, tactile keys with a responsive 'over-centre' action and are designed for use in harsh industrial environments. High contrast white keytops are permanently laser engraved with black characters and have integral white LED illumination for use in dark or partially lit locations.



The keypad can be installed on the surface or under the panel.
(Underpanel Installation Instructions are in the Underpanel Fitting Kit)
Fit the supplied silicone seal into the seal groove on the keypad
Use the groove on top for underpanel, and on back for surface fix.
The wide part of the seal goes into the groove – see picture below of the seal fitted to the back of the keypad.



Connection Details

Connection Details for 4 Key Keypad

CONTACT CONNECTIONS
● ● ● ● ● ●
7 6 5 4 3 2 1
(As viewed from rear of keypad)

1
A ☐
B ☐
C ☐
D ☐

KEY LOCATION
(As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	Common
3	D
4	C
5	B
6	A
7	Anode

Connection Details for 12 Key Keypad

CONTACT CONNECTIONS
● ● ● ● ● ● ● ● ● ● ● ●
10 9 8 7 6 5 4 3 2 1
(As viewed from rear of keypad)

1 2 3
A ☐ ☐ ☐
B ☐ ☐ ☐
C ☐ ☐ ☐
D ☐ ☐ ☐

KEY LOCATION
(As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	–
8	D
9	C
10	Anode

Connection Details for 16 Key Keypad

CONTACT CONNECTIONS
● ● ● ● ● ● ● ● ● ● ● ● ● ●
10 9 8 7 6 5 4 3 2 1
(As viewed from rear of keypad)

1 2 3 4
A ☐ ☐ ☐ ☐
B ☐ ☐ ☐ ☐
C ☐ ☐ ☐ ☐
D ☐ ☐ ☐ ☐

KEY LOCATION
(As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	4
8	D
9	C
10	Anode

Electrical

Contact Bounce 5 ms (max)
Contact Resistance 100 ohms (max)
Insulation Resistance 50 Mohms (min)
Breakdown Voltage 500 V AC (max 60 secs.)
Switch Rating 24V DC 50mA (max)
Connection X-Y Matrix
Illumination (Pin 1 is 0 V) 5 V DC $\pm$ 10 %, 13mA per key

Mechanical

Operational Life 2 million cycles (min) per key
Keytop Travel 1.4mm nominal
Actuation Force 150 grams nominal
Connector 0.1"pitch, gold plated square pin

Mating Connector Molex 2695 Series or equivalent

Performance

Operational Temp -20°C to 60°C
Impact Rating 5 J
Vibration/Shock ETSI 300 019 5M3
Water / Dust sealed IP65 (when fixed to suitable panel)

Part Numbers

7203-04CW20
7203-12TW20
7203-16TW20
7200-FK020

720TFXi SERIES 4 KEY
720TFXi SERIES 12 KEY
720TFXi SERIES 16 KEY
UNDERPANEL FITTING KIT

Accessories

4200-00
4500-10
Replacement Seals -- go to www.storm-interface.com

RS232 Encoder Interface Module
450 USB Encoder Interface Module
with Buzzer and Illumination Control

Dimensions

Overall sizes
Panel Cutout DXF
Surface Model STEP


See following page.
Download .dxf and .stp files from
www.storm-interface.com




Install the keypad onto the surface of a panel as follows :-

- Fit the seal to the rear of the keypad
- Place the keypad onto the panel and fit the self locking nuts to the studs on the back
- Recommended tightening torque 50Ncm


Side View : 4, 12, 16

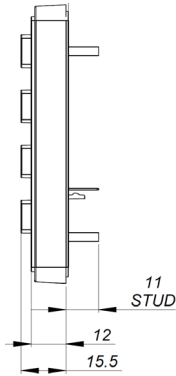


Front and Back View : 4 way

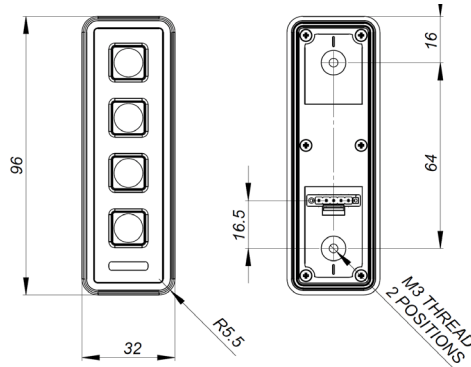


Panel Cutout : 4 way




Front and Back View, 12 way

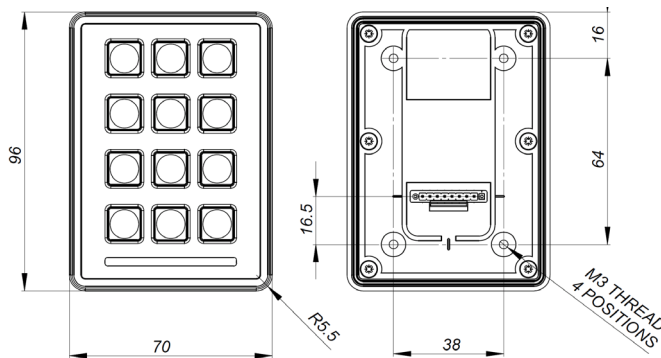


Panel Cutout : 12 way



Front and Back View, 16 way

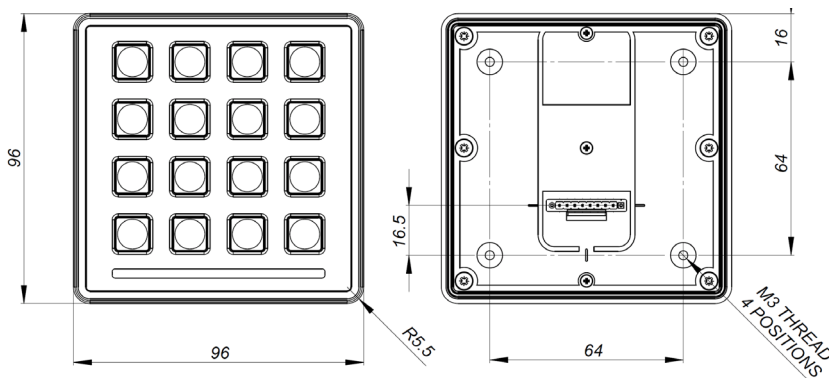

Panel Cutout : 16 way



All panel dims in mm.
Corner Rads all M3

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9