

9000 series

Momentary pushbutton switches

Distinctive features and specifications

UG1410A



- ☐ Two case lengths
- ☐ Three electrical functions
- ☐ Sealing options
- ☐ Model X1146 with Ø 16 (.630) bushing

B2

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
 - silver contact (A) : 1A 30VDC
 - gold plated contacts (CD) : 100mA 30VDC
- Initial contact resistance : 50 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength :
 - 1.000 Vrms 50 Hz min. between terminals
 - 1.500 Vrms 50 Hz min. between terminals and frame
- Electrical life : 250.000 cycles

MATERIALS

- Case : thermoplastique UL94-V0
- Actuator : polyamide, glass filled
- Bushing : brass, nickel plated
- Contacts :
 - A : silver
 - CD : brass, gold plated
- Terminal seal : epoxy

GENERAL SPECIFICATIONS

- Total travel :

9600-9400-9400Y		9600N-9400N
Functions 3 and 5	Function 2	Function 3
1,3 mm	2 mm	0,9 mm


- Torque : 1,25 Nm (.922 Ft.lb) max. applied to nut
- Operating temperature : -30°C to +65°C

The company reserves the right to change specifications without notice.

9000 series

Momentary pushbutton switches

Overview

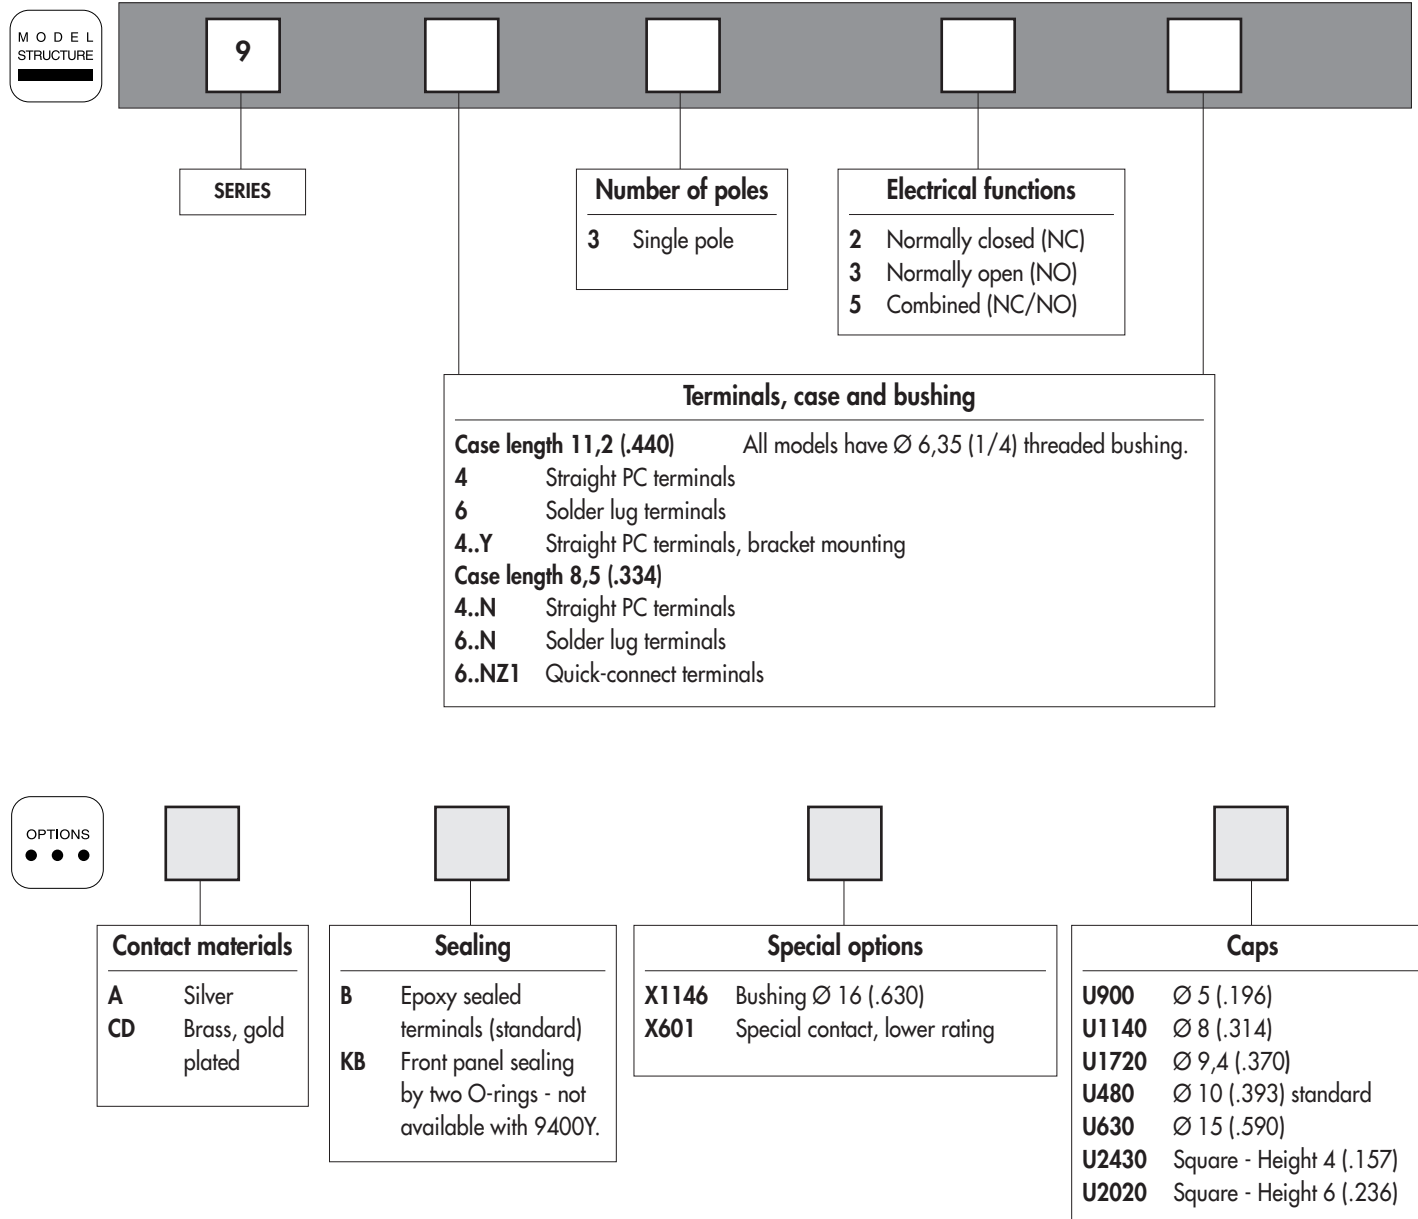

ABOUT THIS SERIES

On the following pages, you will find successively :

- model structure of switches
- their options in the same order as in above chart

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.



NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.



Sealing boots are available to protect the switches against dust and water. They are presented in section H.



Mounting accessories : standard hardware supplied with all switches : 2 hex nuts 8 mm (.314) across flats and 1 lockwasher. Standard and special hardware available are presented in section I.




Packaging unit : 50 pieces, except for 9400Y (25 pieces)

9000 series


Momentary pushbutton switches

9600 - 9400 - 9400Y


MODEL
STRUCTURE

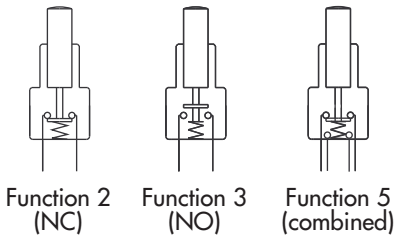

- Single pole
- Solder lug or straight PC terminals
- Epoxy sealed terminals

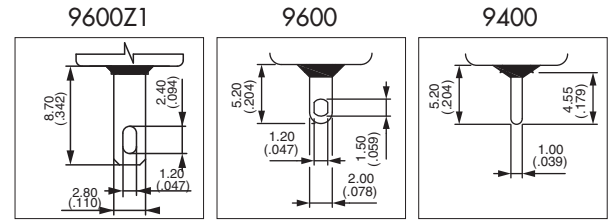

MODEL
STRUCTURE



Solder lug terminals - case length 11,2 (.440) : 9600



9632B




Normally Closed

9635B



Combined function

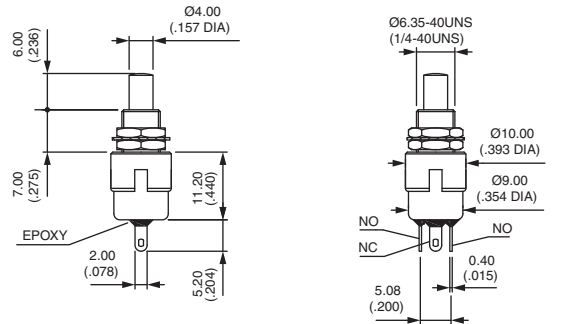

For Normally Open (function 3), see next page.

Straight PC terminals - case length 11,2 (.440) : 9400



9432B



Normally Closed

9433B




Normally Open

9435B



Combined function

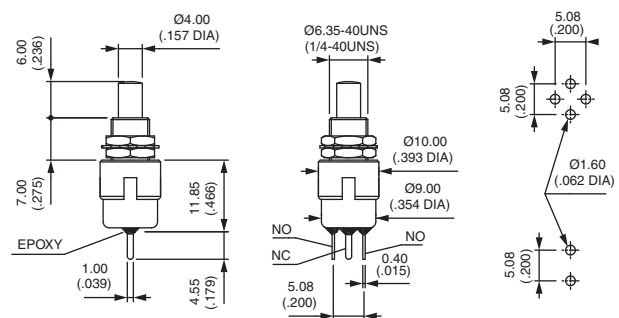

Bracket mounting - case length 11,2 (.440) : 9400Y



9432YB



Normally Closed

9433YB




Normally Open

9435YB



Combined function

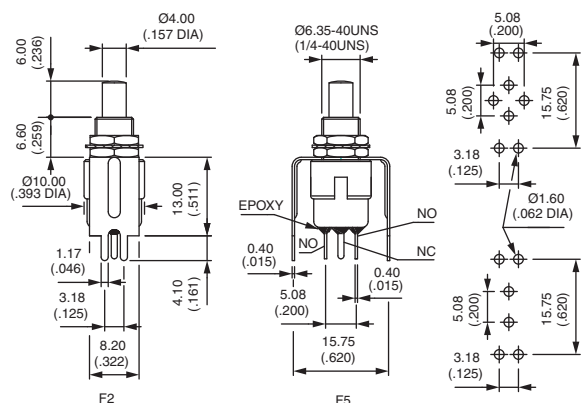

The bracket is not fastened to the switch.


Solder lug terminals - case length 8,5 (.334) : 9600N



9633NB



Normally Open

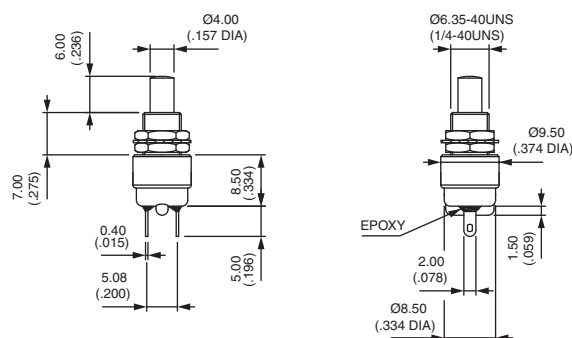

Also available with quick-connect terminals 2,8 x 0,5 mm : 9633NZ1


Straight PC terminals - case length 8,5 (.334) : 9400N




9433NB



Normally Open

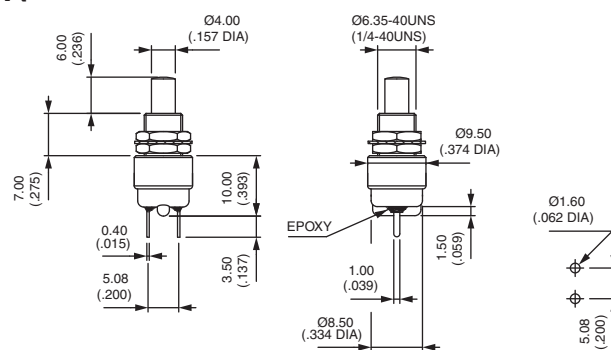

PANEL CUT-OUT



Bushing Ø 16 (.630) - metal button : 9633•X1146



Silver contacts
9633ABX1146




Normally open

Gold plated silver contacts
9633ADB1146



Normally open

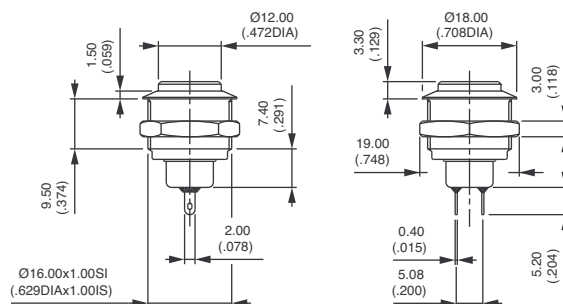

Hex nut 19 (.748) across flats

Panel cut-out : Ø 16,2 (.637)

Max. current/voltage rating. : 1A 30VDC

Epoxy sealed terminals. Options of the following pages not applicable.

9000 series

Momentary pushbutton switches

OPTIONS



CONTACT MATERIALS



A Silver
CD Brass, gold plated

Special contact, lower rating : see X601 under "Special options".

SEALING





B Epoxy sealed terminals (standard)

KB Combined sealings
Epoxy sealed terminals + front panel sealing by two O-rings.
Protects the switch against water and dust.
Panel seal withstands 0,1 bar pressure.



Option KB not available on 9400Y model.

Sealing boots : see section H.



SPECIAL OPTIONS



X601 Silver plated brass contacts
Current/voltage rating for an electrical life of 20.000 cycles : 0,5A 30VDC.
Minimum quantity : 5.000 pieces per model and shipment.


X1146 Model with dia. 16 (.630) bushing and metal plunger
See previous page.




9000 series

Momentary pushbutton switches


CAPS




U900



U1140




U1720




U480

Standard




U630



U2430

Square



U2020

Square


Cap colours

Replace last "0" by number

1	blue
1/4	dark blue
2	black
3	green
4	grey
5	yellow
6	red
7	ivory
7/1	white
9	orange


DRESS NUTS

Chrome plated. Order separately.




U1636

For cap U1140



U840

For cap U480



U825

For cap U630

9000 series

Alternate action or momentary pushbutton switches

Distinctive features and specifications



❑ Bushing Ø 6,35 (1/4) and 11,9 (15/32)

❑ Two electrical functions

B2

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load and electrical life :
 - silver contacts (A) : 1A 28VDC - 250.000 cycles
 - 3A 28VDC - 10.000 cycles
- gold plated contacts (CD) : 0,4VA 20V max. AC or DC
- Initial contact resistance : 10 mΩ max. at 0,1A 3VDC
- Insulation resistance : 10.000 MΩ min.
- Dielectric strength :
1.000 Vrms 50 Hz min.

MATERIALS

- Case : diallyphthalate
- Actuator : nylon
black for series 9630M
white for series 9631
- Bushing : brass, nickel plated
- Contacts :
 - A** : silver
 - CD** : brass, gold plated
- Terminal seal : epoxy


GENERAL SPECIFICATIONS

- Operating temperature : -30°C to +85°C
- Travels : see table below.


MODELS	9631	9633M
Total travel	3,48 (.137)	2,79 (.110)
Pre-travel	0,66 (.026)	-
Over travel	2,69 (.106)	0,51 (.020)

9000 series

Alternate action or momentary pushbutton switches

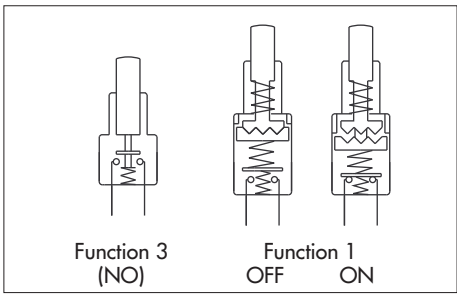

- Single pole
- Solder lug terminals
- Epoxy sealed terminals



B2

Bushing Ø 6,35 (1/4) - Alternate action - tactile feedback




Gold plated contacts
9631CDB

ON - OFF

Silver contacts
9631AB

ON - OFF

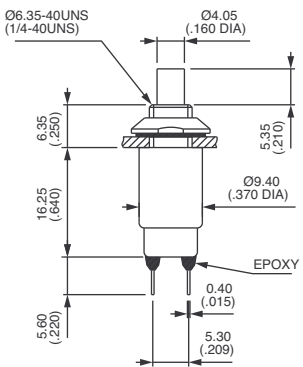

Standard hardware : 1 conic nut and 1 lockwasher


Bushing Ø 11,9 (15/32) - front or rear mounting - NO



9633MCDB



Normally open



MODEL	A
9633M	6.35 (.250)

Standard hardware : 2 hex nuts 14 mm (.551) across flats and 1 lockwasher

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9