

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850560000](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612/IEC 603-2 Mixed Layout Connector, Female Style M Inverse, 24 Circuits, Lead free

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [85056](#)
Application Backplane
Component Type PCB Receptacle
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style M

Physical

Circuits (Loaded) 24
Circuits (maximum) 32
Circuits Detail Standard Contacts at A:a13-a20; B:b13-b20; C:c13-c20
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Material - Plating Mating Gold
Material - Plating Termination Tin
Number of Columns 8
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Right Angle
PC Tail Length (in) 0.110 In
PC Tail Length (mm) 2.80 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In, 0.126 In
PCB Thickness Recommended (mm) 1.60 mm, 3.20 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Plating min: Mating (µin) 24
Plating min: Mating (µm) 0.60
Polarized to PCB Yes
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C
Termination Interface: Style Through Hole

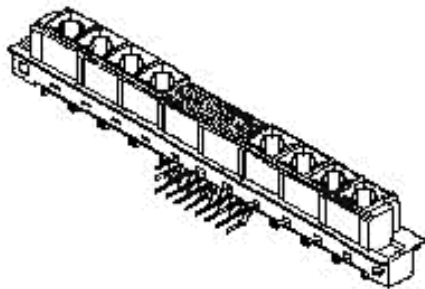

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[85056Series](#)

Mates With

DIN 41612/EIC 603-2 Mixed Layout
Connectors [85009](#) , [85017](#)

Use With

[85022](#) DIN 41612 High Current Contact

Electrical

Current - Maximum per Contact	2.5A
Data Rate	622.0 Mbps
Real Signals (per 25mm)	30
Voltage - Maximum	250V AC (RMS)


Material Info

Reference - Drawing Numbers

Sales Drawing	SD-85056-0000, SD-85056-0004
---------------	------------------------------

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

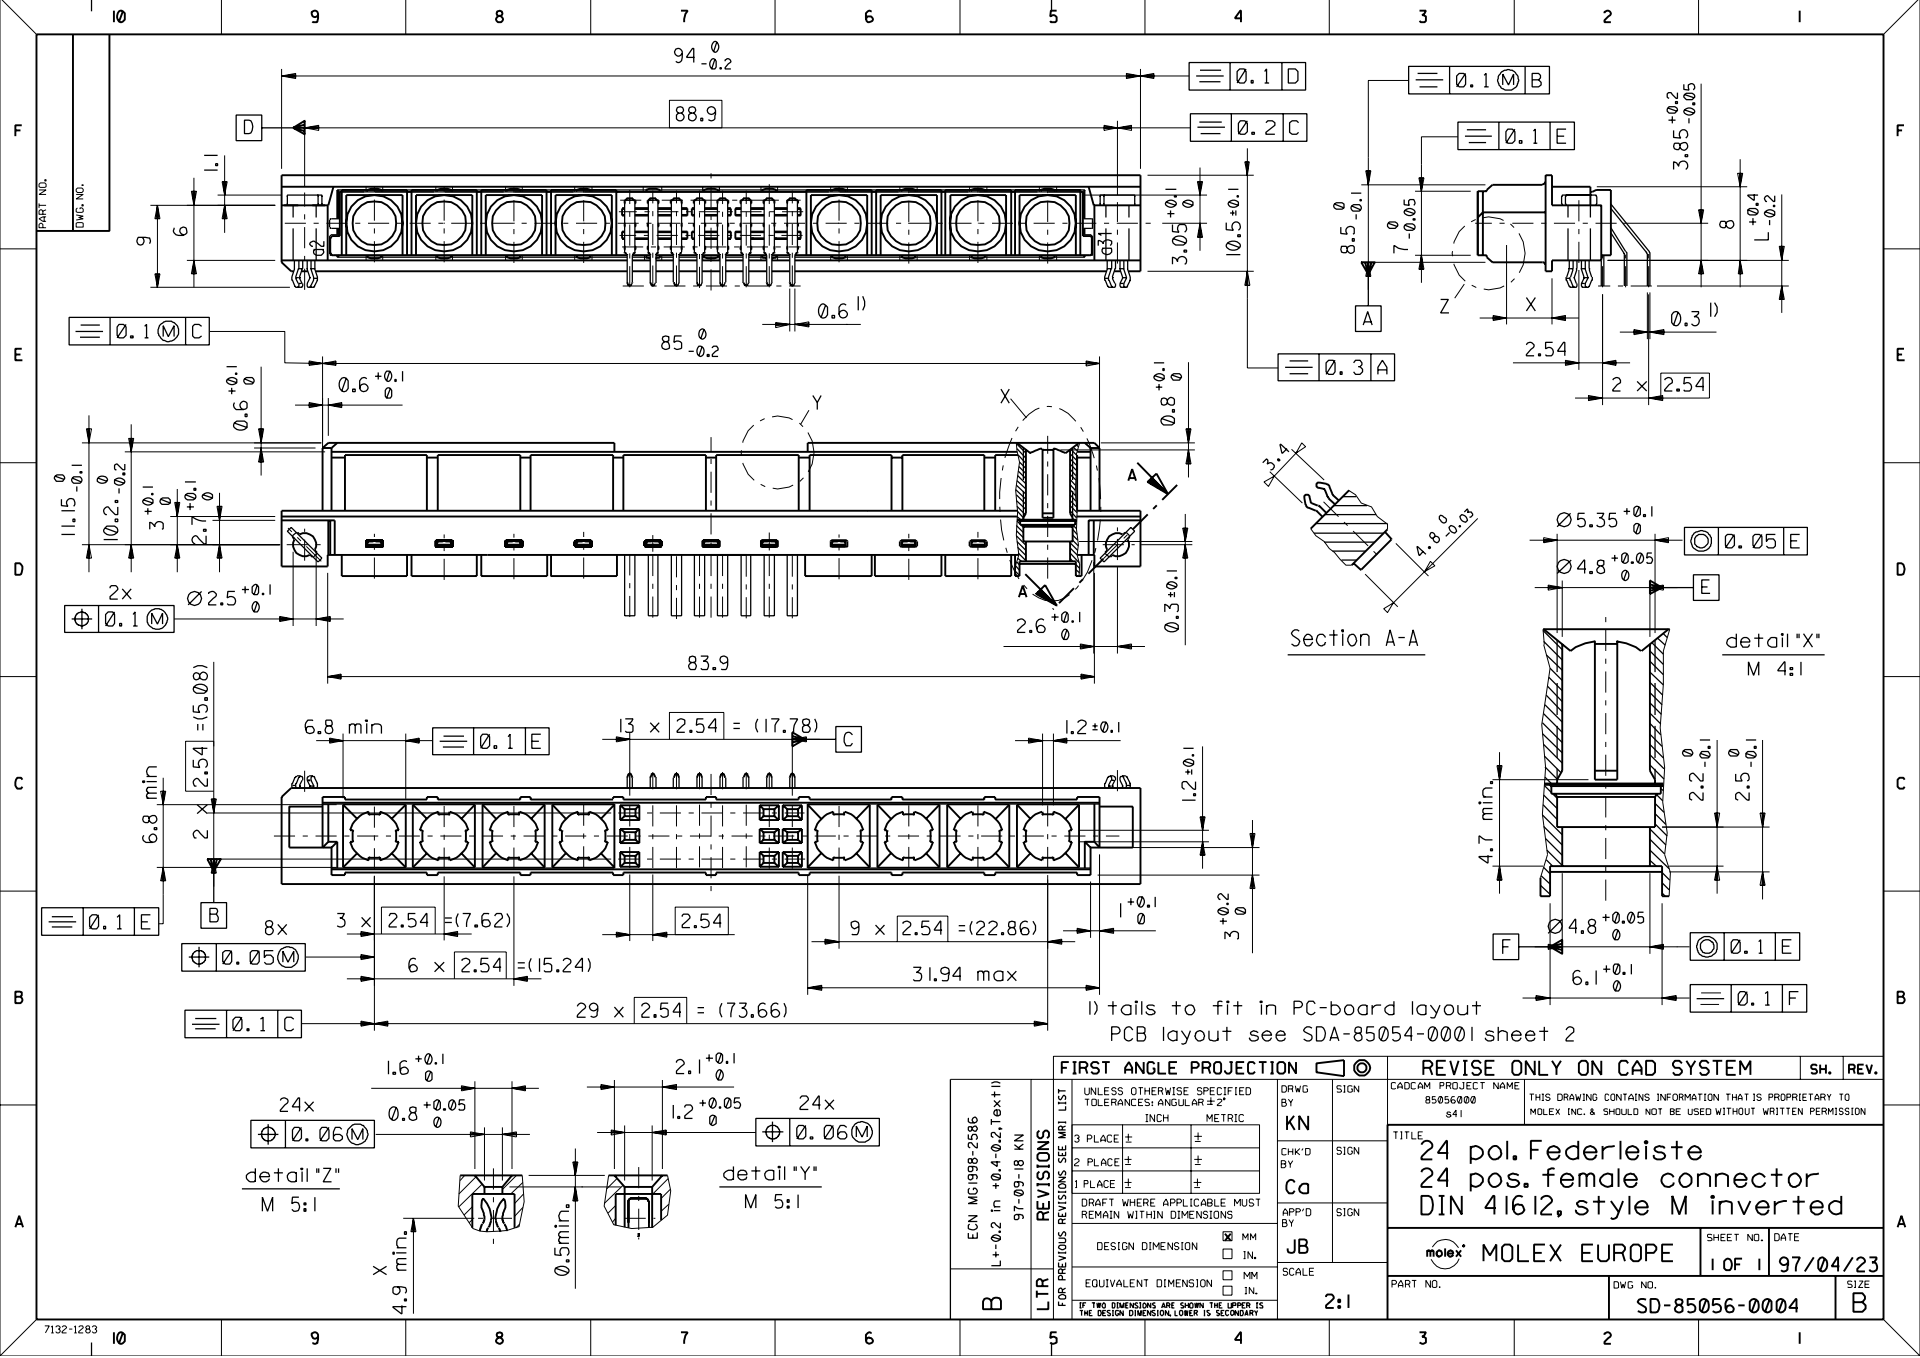

PART NO.
DWG. NO.

0.1 C

0.1 M

0.1 E

0.1 C

0.06 M

0.06 M

0.06 M

94⁰_{-0.2}

88.9

85⁰_{-0.2}

83.9

29 x 2.54 = (73.66)

13 x 2.54 = (17.78)

6 x 2.54 = (15.24)

3 x 2.54 = (7.62)

9 x 2.54 = (22.86)

31.94 max

0.6 l)

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

0.6 ± 0.1

Section A-A

detail "X"
M 4:1

detail "Z"
M 5:1

detail "Y"
M 5:1

l) tails to fit in PC-board layout
PCB layout see SDA-85054-0001 sheet 2

FIRST ANGLE PROJECTION		REVISE ONLY ON CAD SYSTEM		SH.	REV.
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 2°		CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
INCH METRIC		85056000		841	
3 PLACE ±		TITLE		24 pol. Federleiste	
2 PLACE ±		24 pos. female connector		DIN 41612, style M inverted	
1 PLACE ±		MOLEX EUROPE		SHEET NO. DATE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		1 OF 1		97/04/23	
DESIGN DIMENSION		PART NO.		DWG NO.	
EQUIVALENT DIMENSION		SD-85056-0004		SIZE	
IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY		2:1		B	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9