


Technical drawing of a 5-pin connector assembly. The drawing shows a cross-section of the connector housing with five pins labeled 'a' through 'e' from bottom to top. The pins are connected to internal components, including a diagonal spring and a small lever. The drawing includes the following labels and dimensions:

- 5,2 REF.**: Dimension indicating the reference length for the pins.
- CONTACT LEVEL**: Indicated by a downward arrow pointing to the top of the pins.
- CONTACT AREA**: Indicated by a horizontal double-headed arrow at the bottom of the pins.
- REFERENCE LINE**: Indicated by a horizontal line at the bottom of the drawing.
- 3,8**: Dimension indicating the height of the connector housing.
- ACTION PIN AREA**: Indicated by a horizontal double-headed arrow at the bottom of the pins.
- 1**: Circled number indicating the number of pins for each contact level.

CONTACT LAYOUT

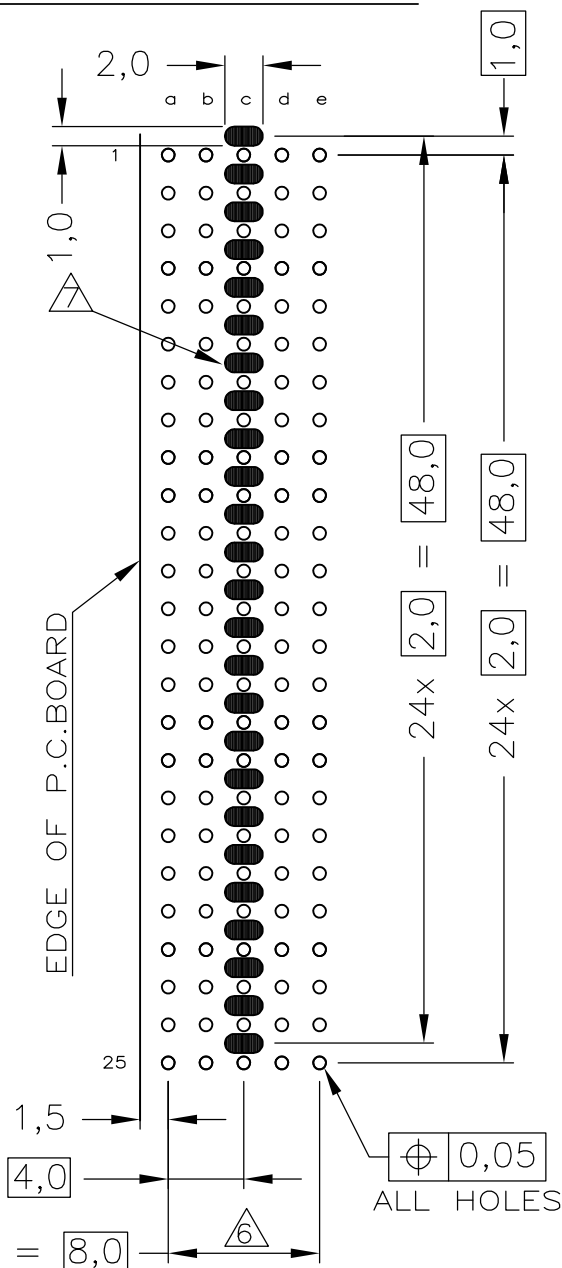

	a	b	c	d	e
1	1	1	1	1	1
2	1	1	1	1	1
3	1	1	1	1	1
4	1	1	1	1	1
5	1	1	1	1	1
6	1	1	1	1	1
7	1	1	1	1	1
8	1	1	1	1	1
9	1	1	1	1	1
10	1	1	1	1	1
11	1	1	1	1	1
12	1	1	1	1	1
13	1	1	1	1	1
14	1	1	1	1	1
15	1	1	1	1	1
16	1	1	1	1	1
17	1	1	1	1	1
18	1	1	1	1	1
19	1	1	1	1	1
20	1	1	1	1	1
21	1	1	1	1	1
22	1	1	1	1	1
23	1	1	1	1	1
24	1	1	1	1	1
25	1	1	1	1	1

Technical drawing of a 25-pin D-sub connector. The drawing includes a front view (top) and a side view (bottom). The front view shows the connector's pins and dimensions: 26,8 mm total width, 15,4^{+0,0}_{-0,1} mm pin pitch, and a 4 mm pin diameter. The side view shows the connector's profile with dimensions: 48,0 mm height, 49,9^{+0,0}_{-0,1} mm total height, 2,0 mm pin spacing, 0,95 MAX. mm pin height, and 17,2 mm total width. The side view also shows the connector's internal structure and a dashed line indicating the printing area (THIS SIDE).

1	MATERIAL HOUSING	: GRAY GLASS FILLED POLYESTER UL-RATING V0
	CONTACT	: PHOSPHORBRONZE
	REDUCED CROSS-TALK SHIELD:	PHOSPHORBRONZE
2	GENERAL CONTACT PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER. REDUCED CROSS-TALK SHIELD PLATING: GOLD FLASH OVER 1,27μm NICKEL MIN.	
3	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.	
4	CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.	
5	CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE	
6	PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.	
7	PLATED SPOT ONLY ON COMPONENT SIDE, FORMING ONE CONTACT WITH PLATED THROUGH HOLES OF ROW C	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN	23AUG2004	 Tyco Electronics Corporation s-HertogenBosch, Netherlands,		
		CHK B.MOOIJ	23DEC2004			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC + - 1 PLC + - 2 PLC + - ±0.2 3 PLC + - 4 PLC + - ANGLES ± -	APVD B.MOOIJ	23DEC2004	NAME Z-PACK 2mm HM TYPE B 125 POS. RIGHT ANGLE MALE CONNECTOR WITH REDUCED CROSS-TALK SHIELDS		
		PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029				
MATERIAL -	FINISH -	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-5352272	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 of 1	REV D	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9