

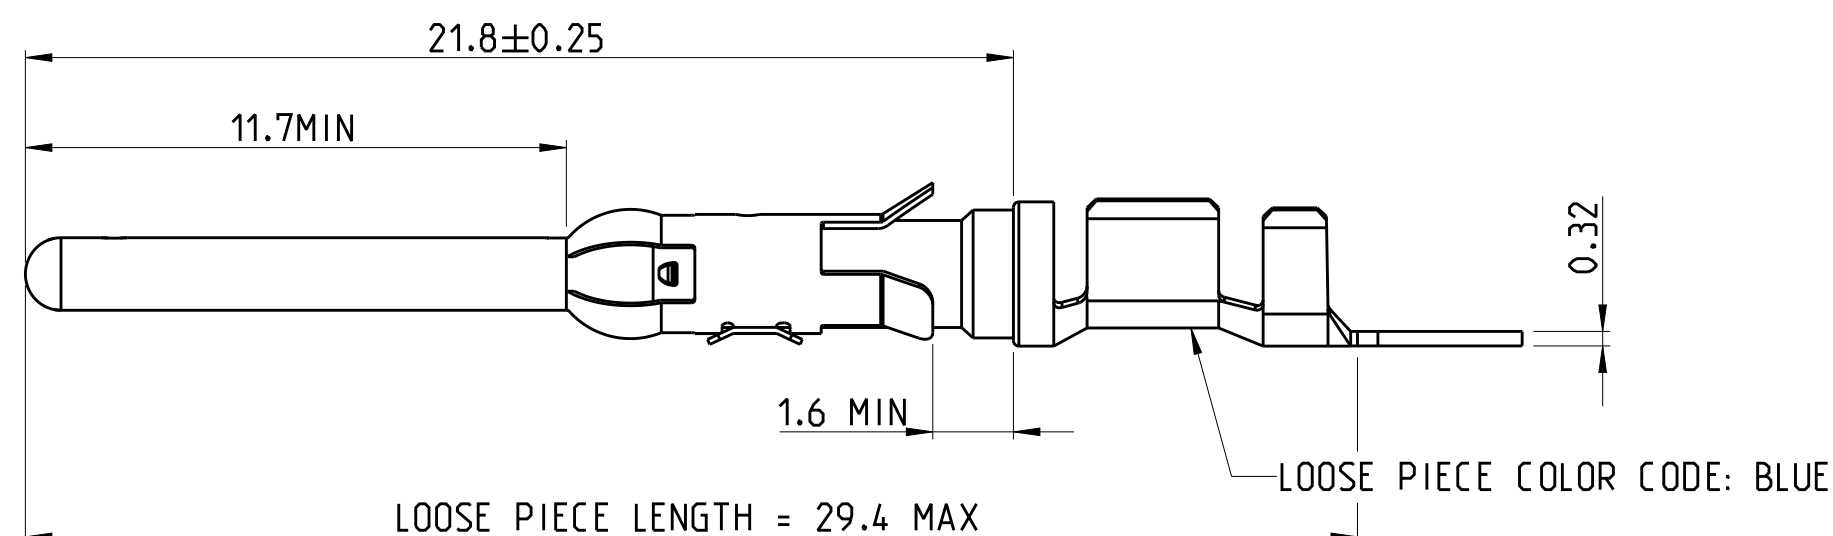


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
B	E		M1	COLOR CODE DETAILS ADDED	09JAN2014	TJ	JK	
			M2	ADDITION OF NOTE 12. TEXT "REF" DIM 3 & 3.7 IN ZONE C1 & C2. "29.4 MAX" IN ZONE B3	21JULY2015	TJ	PS	
			M3	PN 164161-5 OBSOLETE	03OCT2017	TJ	NG	

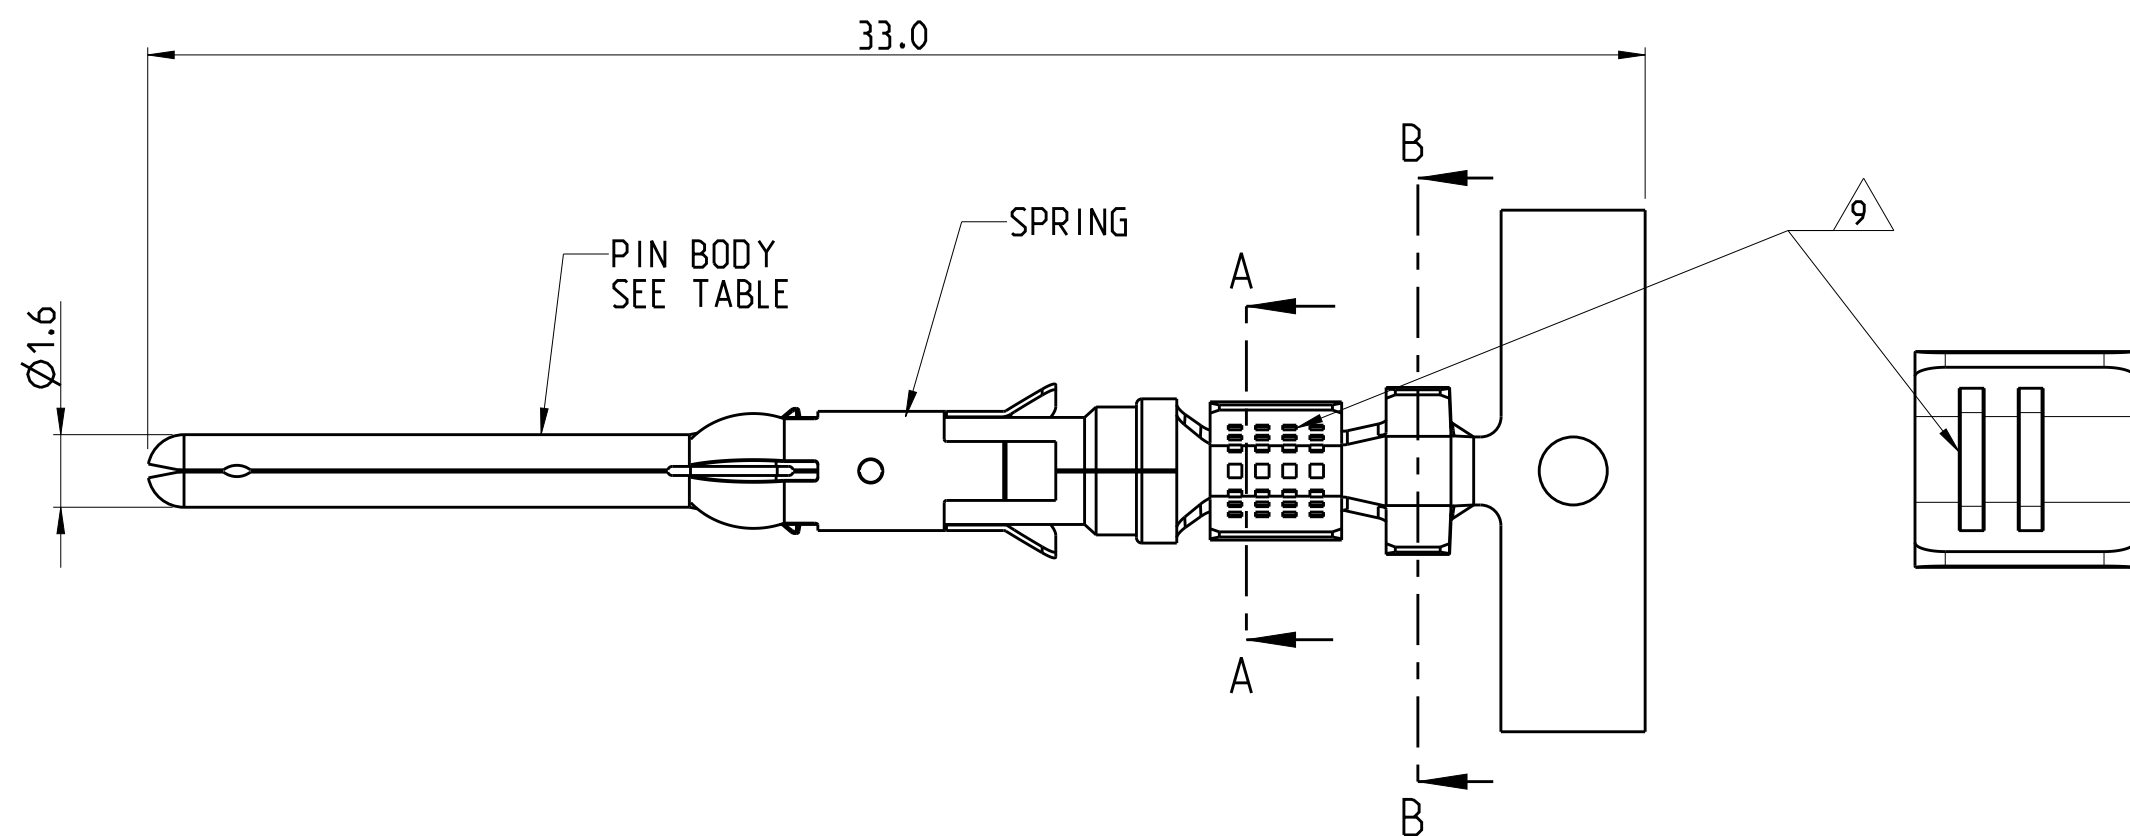


NOTES


1. 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN PRECIOUS METAL PLATE OVER ZONE 1.
1 MICRON MIN TIN PLATE OVER ZONE 2.
CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042
BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS)
2. 1.27 MICRONS MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN PRECIOUS METAL ELECTROPLATE OVER ZONE 1.
0.076 MICRON MIN GOLD FLASH PLATE OVER THE REMAINDER OF ZONE 3.
CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042
BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS)
3. 1.54 - 2.54 MICRON SILVER PLATE OVER ZONE 3.
4. 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN GOLD PLATE OVER ZONE 1.
0.076 MICRON MIN GOLDFLASH PLATE OVER THE REMAINDER OF ZONE 3.
5. 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN GOLD PLATE OVER ZONE 1.
1 MICRON MIN TIN PLATE OVER ZONE 2.
6. HOT-DIPPED PRETIN
7. 1.27 MICRONS MIN NICKEL PLATE OVER ZONE 3.
1 - 3 MICRON ELECTRO-TIN PLATE OVER ZONE 3
8. 0.76 MICRON MIN NICKEL PLATE OVER ZONE 3 PER QQ-N-290
1.5 - 2.54 MICRON SILVER PLATE OVER ZONE 3.
9. SERRATIONS CAN BE MULTI LOCK OR TWO SLOTS.
10. WIRE RANGE: 0.75 - 1.50 mm² (18-16 AWG)
11. INSULATION RANGE: 2.0 - 2.5 mm (.080-.100) DIA
12. OMISSION OF 6 CONTACTS MAX PER REEL OF 5000PCS

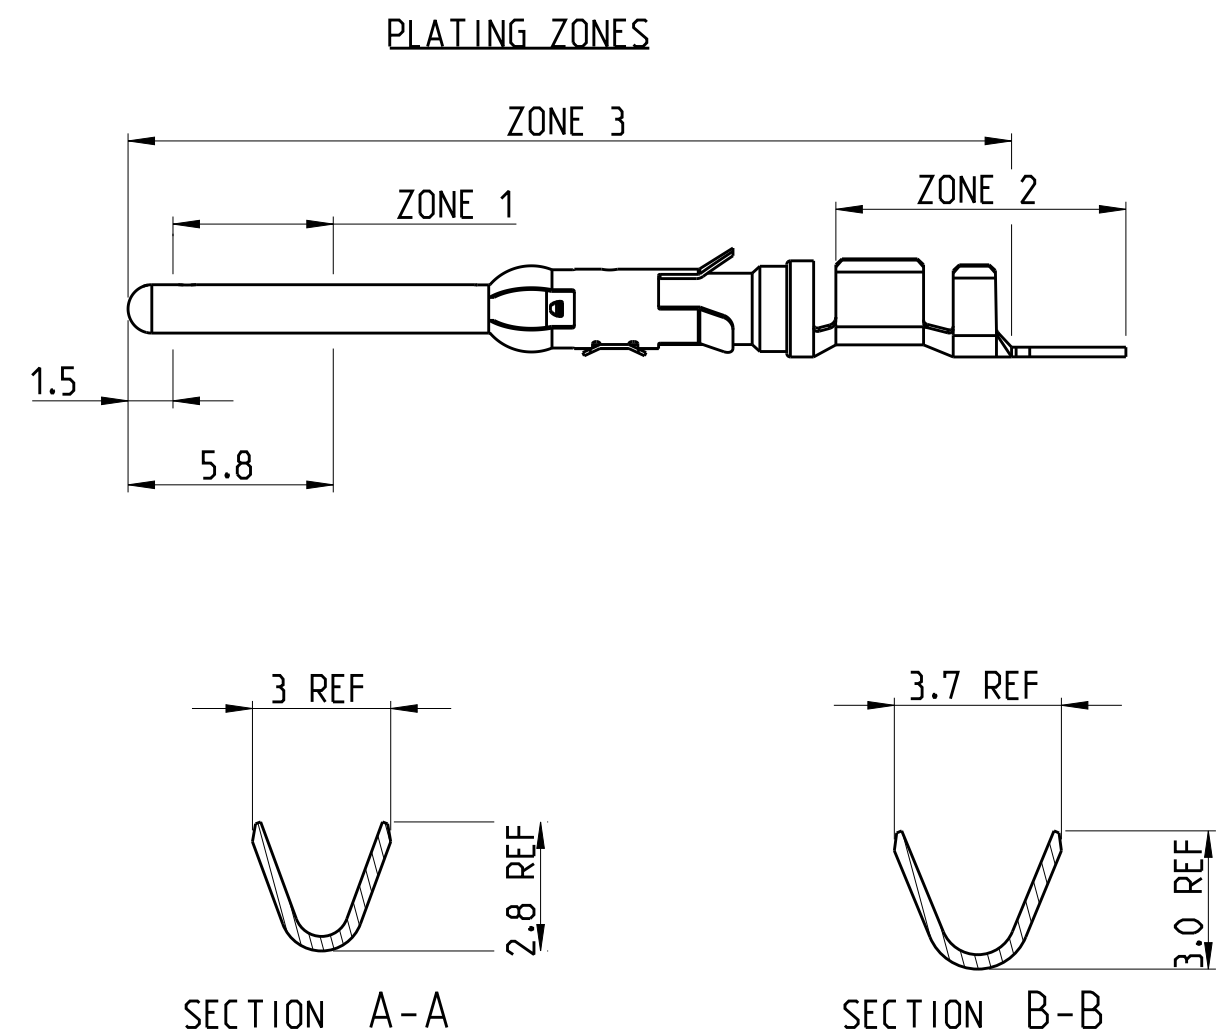

A		STAINLESS STEEL	PHBR	164 164 -8	1- 164 161-5
A		STAINLESS STEEL	PHBR	164 164 -7	1- 164 161-3
B		STAINLESS STEEL	PHBR		1- 164 161-2
A		STAINLESS STEEL	BRESS	164 164 -6	1- 164 161-1
A		STAINLESS STEEL	BRESS	164 164 -5	164 161-9
A		STAINLESS STEEL	BRESS	164 164 -4	164 161-7
B		STAINLESS STEEL	BRESS		164 161-6
A		STAINLESS STEEL	BRESS	164 164 -2	164 161-4
A		STAINLESS STEEL	BRESS	164 164 -1	164 161-3
B		STAINLESS STEEL	BRESS		164 161-2
REELING	FINISH	SPRING MATERIAL	PIN BODY	LOOSE PIECE	PART NUMBER

DWN	01JUN2012			TE Connectivity							
J. BRIGHT	01JUN2012										
CHR	01JUN2012	NAME TYPE III+, SIZE 16, PIN ASS'Y LONG SERIES, 18-16 AWG, 2.0-2.5mm DIA INSULATION									
J. AMBROSE	01JUN2012										
APVD	01JUN2012	PRODUCT SPEC 108-10042									
M. GREENER											
APPLICATION SPEC 114-19000		SIZE A2		CAGE CODE 00779		DRAWING NO C=164161		RESTRICTED TO -			
WEIGHT -											
CUSTOMER DRAWING				SCALE	NTS	SHEET	1	OF	1	REV	M3

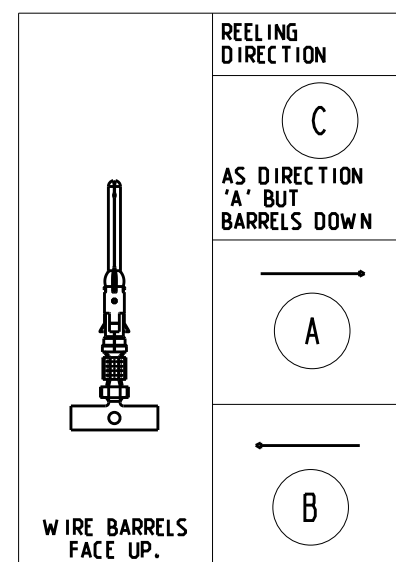

THIS DRAWING IS A CONTROLLED DOCUMENT.													
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: <table border="1"> <tr> <td>0 PLC</td> <td>±0.5</td> </tr> <tr> <td>1 PLC</td> <td>±0.25</td> </tr> <tr> <td>2 PLC</td> <td>±0.15</td> </tr> <tr> <td>3 PLC</td> <td>±0.15</td> </tr> <tr> <td>4 PLC</td> <td>±</td> </tr> <tr> <td>ANGLES</td> <td>±2°</td> </tr> </table>	0 PLC	±0.5	1 PLC	±0.25	2 PLC	±0.15	3 PLC	±0.15	4 PLC	±	ANGLES	±2°
0 PLC	±0.5												
1 PLC	±0.25												
2 PLC	±0.15												
3 PLC	±0.15												
4 PLC	±												
ANGLES	±2°												
MATERIAL SEE TABLE	FINISH SEE TABLE												

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9