
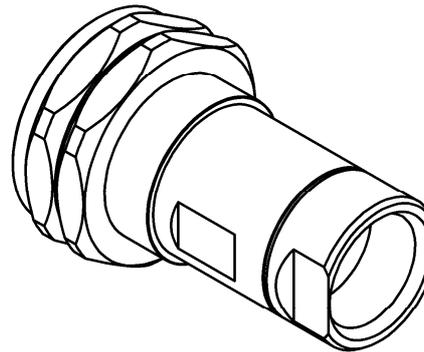


STRAIGHT PLUG EZ FIT TYPE


R185A.031.020

1/2" CORRUGATED CABLE

Series : ECO 7/16

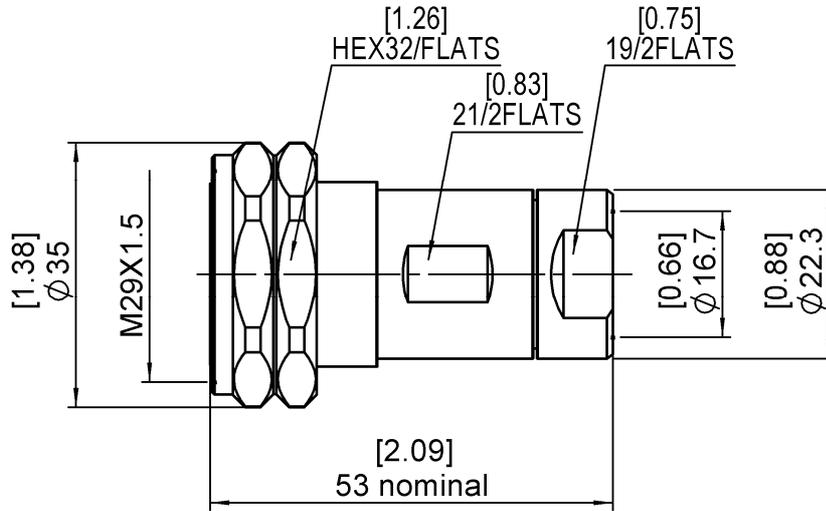

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	BBR
CENTER CONTACT	BRONZE	SILVER
OUTER CONTACT		
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR
-	-	-
-	-	-

Issue : 0943 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STRAIGHT PLUG EZ FIT TYPE

R185A.031.020

1/2" CORRUGATED CABLE

Series : ECO 7/16

PACKAGING

Standard	Unit	Other
1	-	Contact us

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-3	GHz
VSWR	1.1 + 0.0000	x F(GHz) Maxi
Insertion loss	0.05	\sqrt{F} (GHz) dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	1400	Veff Maxi
Dielectric withstanding voltage	2500	Veff mini
Insulation resistance	10000	M Ω mini

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	5.50	20.0	0.00	0.00	0.00	0.00

Assembly instruction :

Recommended cable(s)

LCF 1/2" Cu2y
LDF4-50A - 1/2"
M 1473 Z
M 2831 Z

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off **400** N mini
- torque **NA** N.cm

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	200	N mini
Axial force – Opposite end	100	N mini
Torque	NA	N.cm mini

TOOLING

Recommended torque		
Mating	3500	N.cm
Panel nut	NA	N.cm
Clamp nut	800	N.cm
A/F clamp nut	19.0000	mm

Part Number	Description	Hexagon
.	.	.
R282.011.050	STRIPPING TOOL	

Mating life	100	Cycles mini
Weight	108.2000	g

OTHER CHARACTERISTICS

Watertightness:IP67

ENVIRONMENTAL

Operating temperature	-40/+85	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	


Issue : 0943 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STRAIGHT PLUG EZ FIT TYPE**1/2" CORRUGATED CABLE****R185A.031.020**

Series : ECO 7/16

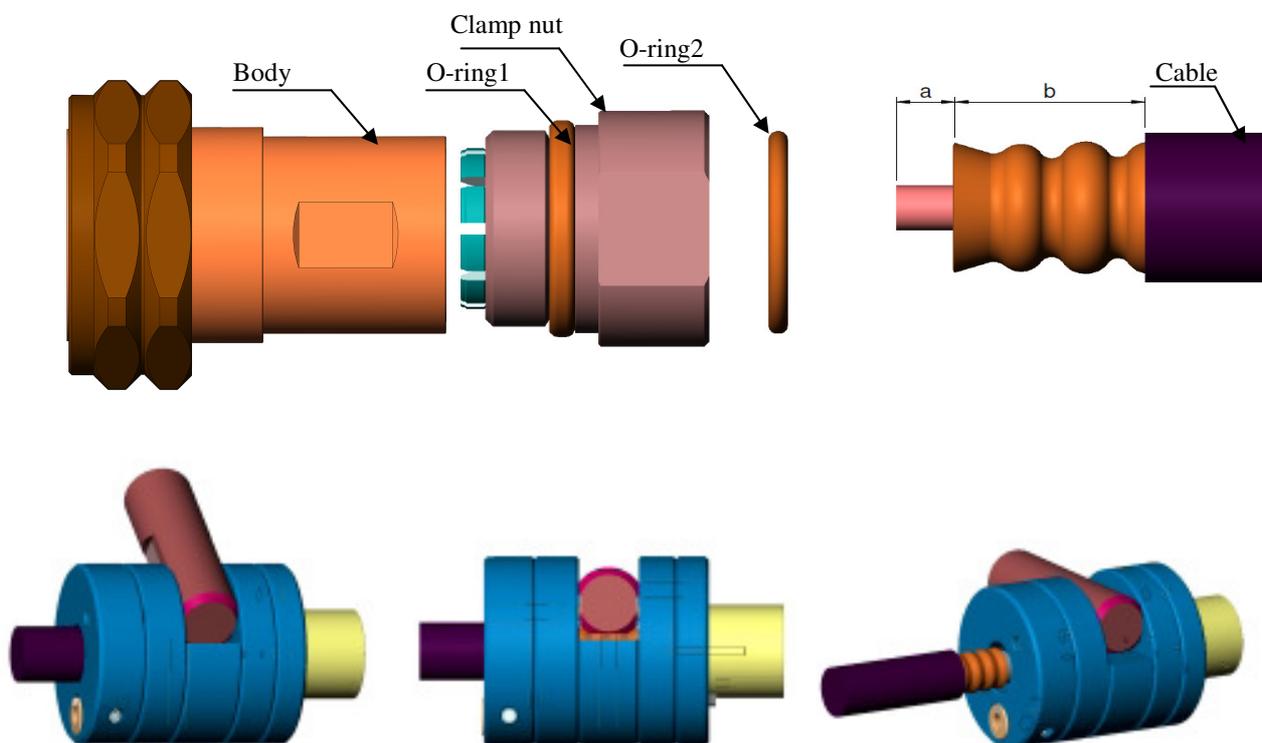**1) STRIPPING OF THE SHEATH AND THE OUTER CONDUCTOR**

- Cut the cable end in a hollow with a hacksaw .
- Raise the handle and introduce the cable until it stops in the stripping tool.
- Push down the handle by exerting a light pressure on it , keep turning the tool until it turns freely.
- Hold the handle down , and turn the tool (of approximately $\frac{1}{4}$ of tour) in the opposite direction , while pulling gently on the cable in order to release pieces of the cable cut.
- Raise the handle, slide the cable out and remove loose pieces of cable.
- In case of cut parts jammed in the tool : raise the handle , introduce again the stripped cable in the tool, screw slightly the cable into the copper previously cut and remove cable + loose parts.
- Push down again the handle.

Issue : 0943 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

STRAIGHT PLUG EZ FIT TYPE


R185A.031.020

1/2" CORRUGATED CABLE

Series : ECO 7/16



2) POINTING OF THE CABLE

- Introduce the cable in the tool as shown.
- Turn the tool to point the inner conductor of the cable.

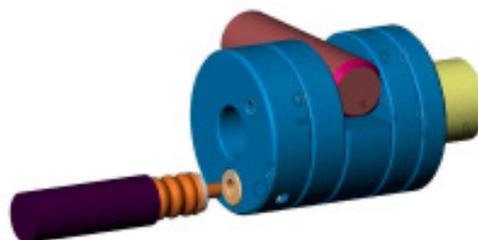


3) CABLE MOUNTING

- Put the O-ring2 in the trough of the cable.
- Mount the clamp nut on the cable, until the clipsage of the elastic contact on the first annule.
- To push the cable assembly forward to stop on the elastic contact.

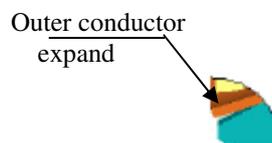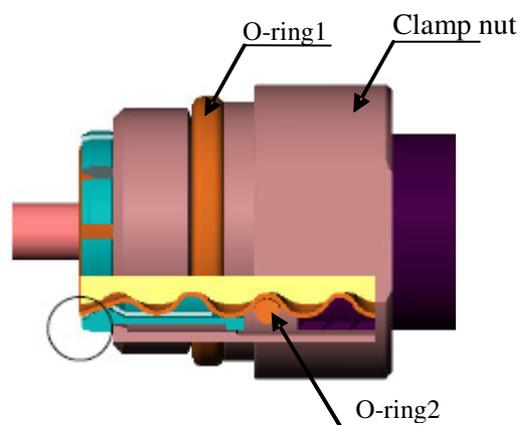

4) MOUNTING CABLE

- Mount the clamp nut with the cable in the body of the connector.
- Couple of tightening recommended: 800N.cm

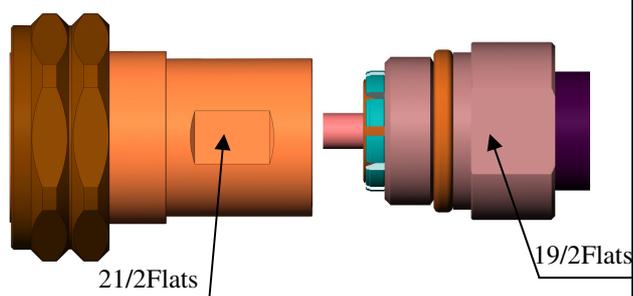

Issue : 0943 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9