

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild <a href="general-regarding-numbers-n

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officer



October 2015

FFB2222A / FMB2222A / MMPQ2222A NPN Multi-Chip General-Purpose Amplifier

Description

This device is for use as a medium power amplifier and switch requiring collector currents up to 500 mA. Sourced from process 19.

Block Diagram




Figure 1. FFB2222A Device Package




Figure 3. FMB2222A Device Package




Figure 5. MMPQ2222A Device Package




Figure 2. FFB2222A Internal Connection




Figure 4. FMB2222A Internal Connection




Figure 6. MMPQ2222A Internal Connection

Ordering Information

Part Number	Top Mark	Package	Packing Method
FFB2222A	.1P	SC70 6L	Tape and Reel
FMB2222A	.1P	SSOT 6L	Tape and Reel
MMPQ2222A	MMPQ2222A	SOIC 16L	Tape and Reel

Absolute Maximum Ratings(1)

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at $T_A = 25^{\circ}\text{C}$ unless otherwise noted.

Symbol	Parameter	Value	Unit
V _{CEO}	Collector-Emitter Voltage	45	V
V _{CBO}	Collector-Base Voltage	75	V
V _{EBO}	Emitter-Base Voltage	5.0	V
I _C	Collector Current - Continuous	500	mA
T _J , T _{STG}	Operating and Storage Junction Temperature Range	-55 to +150	°C

Note:

1. These ratings are based on a maximum junction temperature of 150°C. These are steady-state limits. Fairchild Semiconductor should be consulted on applications involving pulsed or low-duty cycle operations.

Thermal Characteristics(2)

Values are at $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Max.			Unit	
Symbol		FFB2222A	FMB2222A	MMPQ2222A	Oille	
P _D	Total Device Dissipation	300	700	1,000	mW	
	Derate Above 25°C	2.4	5.6	8.0	mW/°C	
R _{θJA}	Thermal Resistance, Junction-to-Ambient	415	180			
	Thermal Resistance, Junction-to-Ambient, Effective 4 Dies			125	°C/W	
	Thermal Resistance, Junction-to-Ambient, Each Die			240		

Note:

2. PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.

Electrical Characteristics

Values are at $T_A = 25^{\circ}C$ unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage ⁽³⁾	I _C = 10 mA, I _B = 0	40			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	$I_C = 10 \mu A, I_E = 0$	75			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	$I_E = 10 \mu A, I_C = 0$	5.0			V
I _{CBO}	Collector Cut-Off Current	V _{CB} = 60 V, I _E = 0			10	nA
I _{EBO}	Emitter Cut-Off Current	$V_{EB} = 3.0 \text{ V}, I_{C} = 0$			10	nA
h _{FE}	DC Current Gain	I _C = 0.1 mA, V _{CE} = 10 V	35			
		I _C = 1.0 mA, V _{CE} = 10 V	50			
		I _C = 10 mA, V _{CE} = 10 V	75			
		I _C = 150 mA, V _{CE} = 10 V ⁽³⁾	100		300	
		I_C = 150 mA, V_{CE} = 1.0 $V^{(3)}$	50			
		I _C = 500 mA, V _{CE} = 10 V ⁽³⁾	40			
\/ (a.at)	Collector Emitter Seturation Voltage(3)	I _C = 150 mA, I _B = 15 mA			0.3	V
V _{CE} (sat)	Collector-Emitter Saturation Voltage ⁽³⁾	I _C = 500 mA, I _B = 50 mA	V.		1.0	
V _{BE} (sat)	Base-Emitter Saturation Voltage ⁽³⁾	I _C = 150 mA, I _B = 15 mA			1.2	V
		I _C = 500 mA, I _B = 50 mA			2.0	
f_T	Current Gain - Bandwidth Product	I _C = 20 mA, V _{CE} = 20 V, f = 100 MHz		300		MHz
C _{obo}	Output Capacitance	V _{CB} = 10 V, I _E = 0, f = 100 kHz		4.0		pF
C _{ibo}	Input Capacitance	V _{EB} = 0.5 V, I _C = 0, f = 100 kHz		20		pF
NF	Noise Figure	I_C = 100 μA, V_{CE} = 10 V, R_S = 1.0 kΩ, f = 1.0 kHz		2.0		dB
t _d	Delay Time	$V_{CC} = 30 \text{ V}, V_{BE(OFF)} = 0.5 \text{ V},$		8		ns
t _r	Rise Time	I _C = 150 mA, I _{B1} = 15 mA	1	20		ns
t _s	Storage Time	$V_{CC} = 30 \text{ V}, I_{C} = 150 \text{ mA},$		180		ns
t _f	Fall Time	I _{B1} = I _{B2} = 15 mA		40		ns

Note:

3. Pulse test: pulse width \leq 300 μ s, duty cycle \leq 2.0%.

Typical Performance Characteristics




Figure 7. Typical Pulsed Current Gain vs. Collector Current




Figure 9. Base-Emitter Saturation Voltage vs. Collector Current




Figure 11. Collector Cut-Off Current vs.
Ambient Temperature




Figure 8. Collector-Emitter Saturation Voltage vs. Collector Current




Figure 10. Base-Emitter On Voltage vs. Collector Current




Figure 12. Emitter Transition and Output Capacitance vs. Reverse Bias Voltage

Typical Performance Characteristics (Continued)




Figure 13. Turn-On and Turn-Off Times vs. Collector Current




Figure 14. Switching Time vs. Collector Current




Figure 15. Power Dissipation vs. Ambient Temperature




Figure 16. Common Emitter Characteristics




Figure 17. Common Emitter Characteristics




Figure 18. Common Emitter Characteristics

Test Circuits




Figure 19. Saturated Turn-On Switching Time





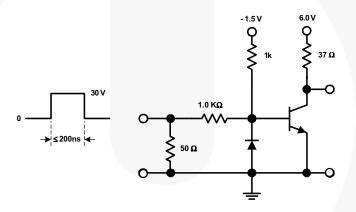



Figure 20. Saturated Turn-Off Switching Time

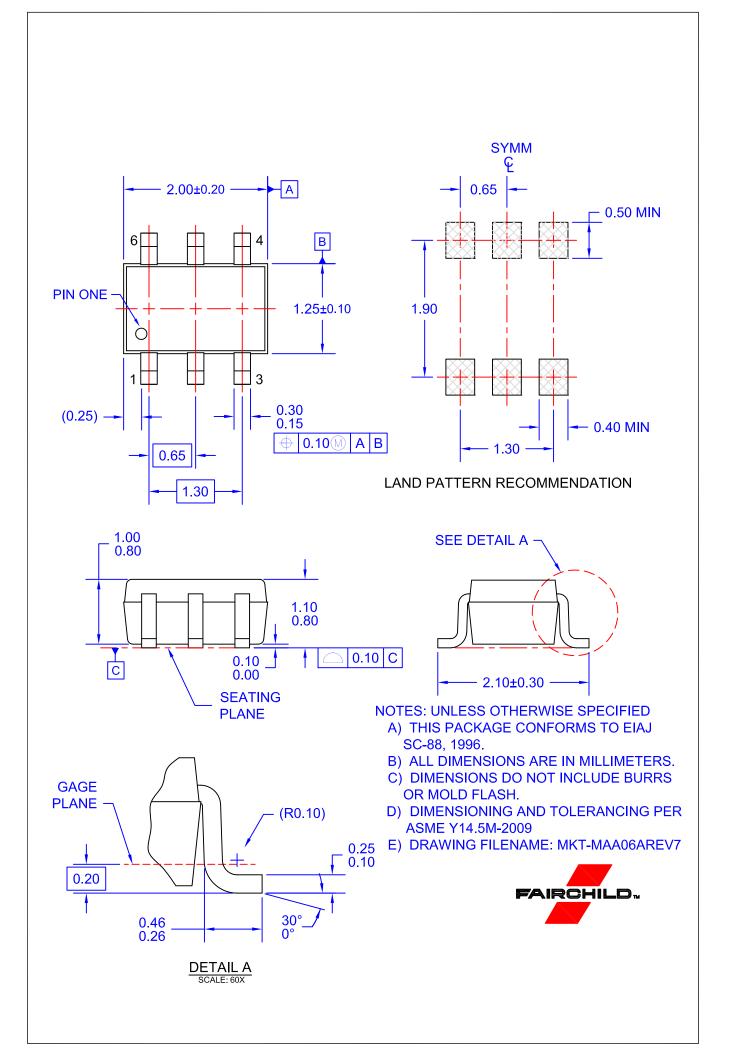


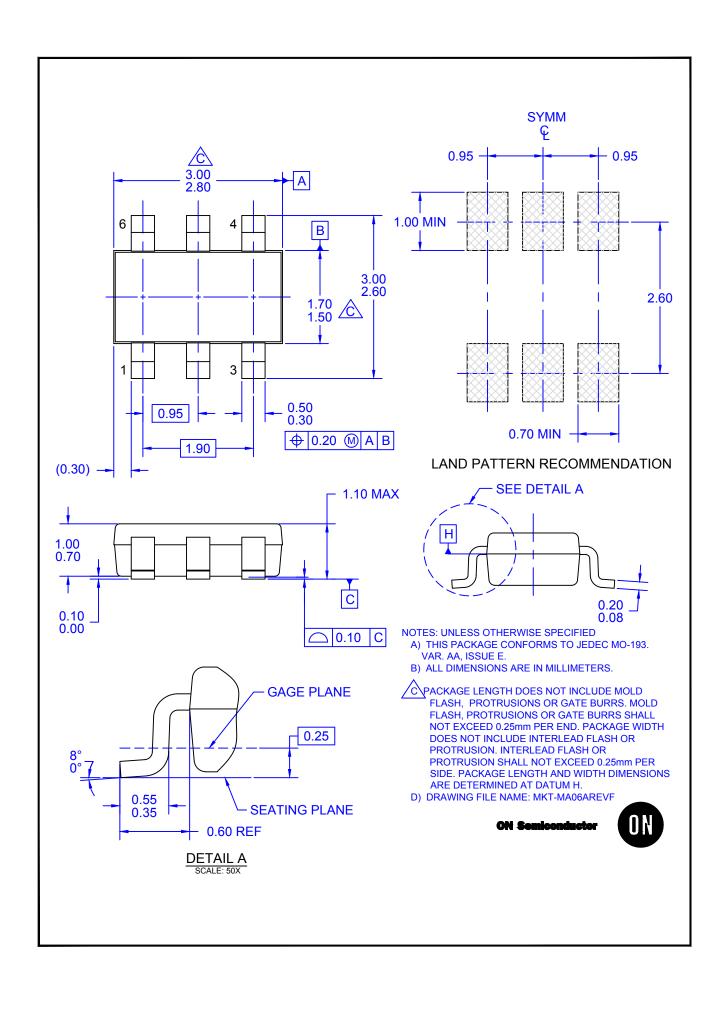


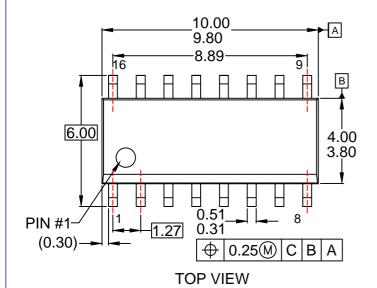



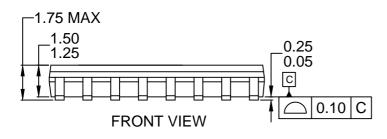





NOTES:

- A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AC, ISSUE C.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS
- D) CONFORMS TO ASME Y14.5M-2009
- E) LANDPATTERN STANDARD: SOIC127P600X175-16AM
- F) DRAWING FILE NAME: M16AREV13.



ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdt/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and exp

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ON Semiconductor: FMB2222A FMB2222A_Q

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9