



The LTC-7PN series was design specifically to be printed circuit board (PCB) compatible. With a low profile, prismatic shape, this battery is unique in the industry and a perfect match for space saving requirements. Available in 3 PCB and 1 surface mounting configurations, these cells provide high quality, high energy density, non-position sensitive solutions to your high density electronics power needs.

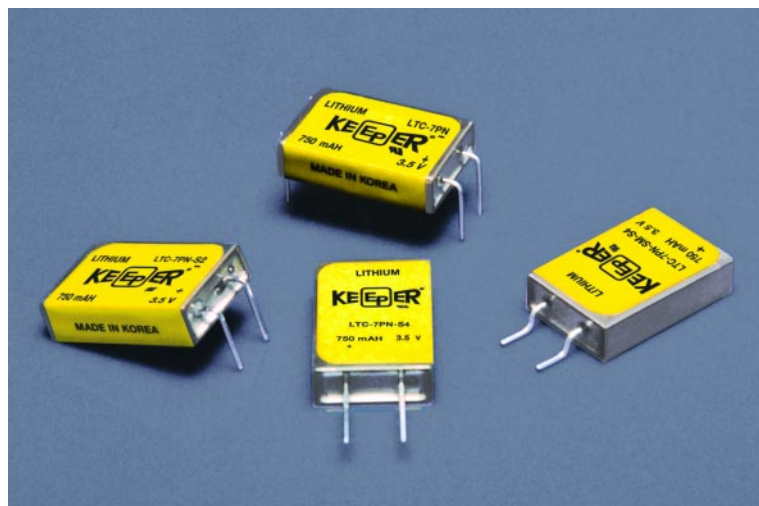

## LTC-7PN PRODUCT FEATURES

- Compliant with lead-free RoHS and WEEE EC directives.
- Low profile, prismatic design.
- Stainless steel construction provides corrosion resistance, hermetic seal and structural integrity.
- Years of low rate continuous use.
- Stand-by use with 80% capacity retention after 15 years at room temperature.
- Highly efficient utilization of valuable board space.
- Wave solderable (limit solder bath exposure to a maximum of 5 seconds).
- High energy density compared to other chemistries.
- No charging circuits required.
- Higher cell voltage allows for fewer cells and high reliability.
- Flat discharge characteristics provide optimum voltage regulation.
- Non-pressurized system allow for high temperature usage.
- Ship unrestricted. IATA No. UN3090.
- Underwriters Laboratories recognized component.

TYPICAL LTC-7PN DISCHARGE CHARACTERISTICS AT VARIED TEMPERATURES

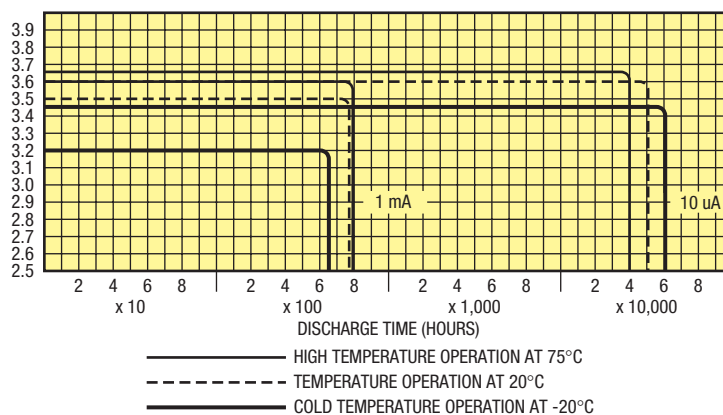

## DO YOU HAVE QUESTIONS

### CONCERNING:


- What size battery you need?
- What is passivation and its effects?
- What is the maximum rate of this cell?
- Any other technical question?

If so, call our Engineers at  
**1-800-201-0215 or 1-417-625-1116**  
 for detailed technical information.

Part Number	Voltage	Capacity (mAh)	Length (in.)	Width (in.)	Thickness (in.)	Weight (g)
LTC-7PN	3.5	750	1.00	0.65	0.26	6.8
LTC-7PN-S2	3.5	750	1.00	0.65	0.26	6.8
LTC-7PN-S4	3.5	750	0.65	0.26	1.00	6.8
LTC-7PN-SM-S4	3.5	750	1.00	0.70	0.26	6.8


### SPECIFICATIONS LTC-7PN

Nominal Open Circuit Voltage, 25°C ..... 3.67 volts  
 Nominal Working Voltage, 25°C ..... 3.5 volts  
 Nominal Capacity (350 hr. rate), 25°C ..... 750 mAh  
 Volume ..... .1625 cu. in.  
 Weight ..... 6.8 GMS  
 Operating Temperature .....  
 .....-40°C to +95°C  
 Case Material:  
 304 Stainless Steel,  
 Hermetically Sealed  
 (case negative polarity)  
 Terminal and Support Pins are  
 .030" dia. (solder tinned)

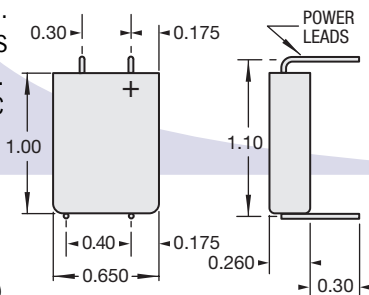


### SPECIFICATIONS LTC-7PN-S4

Nominal Open Circuit Voltage, 25°C ..... 3.67 volts  
 Nominal Working Voltage, 25°C ..... 3.5 volts  
 Nominal Capacity (350 hr. rate), 25°C ..... 750 mAh  
 Volume ..... .1625 cu. in.  
 Weight ..... 6.8 GMS  
 Operating Temperature .....  
 .....-40°C to +95°C  
 Case Material:  
 304 Stainless Steel,  
 Hermetically Sealed  
 (case negative polarity)  
 Terminal and Support Pins are  
 .030" dia. (solder tinned)

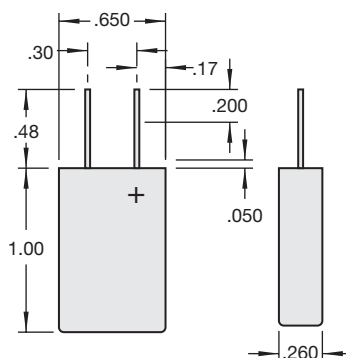

### SPECIFICATIONS LTC-7PN-S2

Nominal Open Circuit Voltage, 25°C ..... 3.67 volts  
 Nominal Working Voltage, 25°C ..... 3.5 volts  
 Nominal Capacity (350 hr. rate), 25°C ..... 750 mAh  
 Volume ..... .1625 cu. in.  
 Weight ..... 6.8 GMS  
 Operating Temperature .....  
 .....-40°C to +95°C  
 Case Material: 304 Stainless Steel, Hermetically Sealed  
 (case positive polarity)  
 Terminal and Support Pins are .030" dia. (solder tinned)

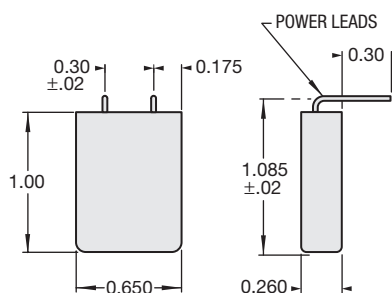

The specifications on this sheet may be changed by EaglePicher without notice.  
 EaglePicher™ is a trademark of and Keeper® is a registered trademark of EaglePicher Corporation.

### WE CAN DESIGN TO FIT ANY APPLICATION.

Our team of engineers can design any pin configuration required to fit your specialized application. If you don't see a battery configuration you need here, call us and we will begin working on a EPT part number just for you.

DISTRIBUTED LOCALLY BY:

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eagle-Picher:](#)

[LTC-7PNS4](#) [LTC-7PNS6](#) [LTC-7PN-S42](#) [LTC-7PN](#) [LTC7PN-SM-S4](#) [LTC7PN-S2](#)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9