SIGN	DATE	DESCRIPTION	APPROVER
1	05/02`12	Operating temperature is changed from −45°C to +130°C to −45°C to +65°C	Guoxue
2	05/02`12	The description of material are changed	Guoxue
3	05/02`12	The dimension is change from 3.6 to 3.5	Guoxue
4	05/02`12	The dimension is change from 10.8 to 10.9	Guoxue
5	09/22`14	Add the safety certification icon & changedThe description of material	Evan
6	09/22`14	Operating temperature & reflow soldering temperature is changed	Evan
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

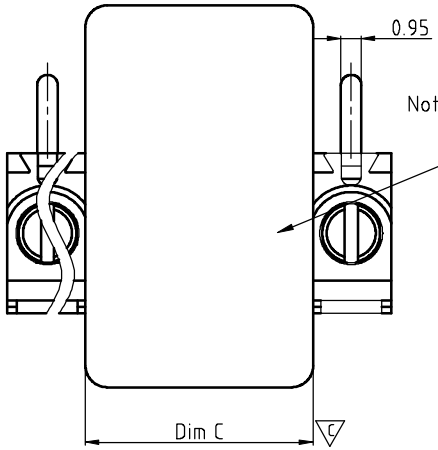

Cover

Poles	Dim C
2P	7.00
3P	10.50

DIMENSION

Dim A	NX3.50+0.20
Dim B	(N-1)X3.50

N=NUMBER OF POLES

Poles	Tolerance
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.30

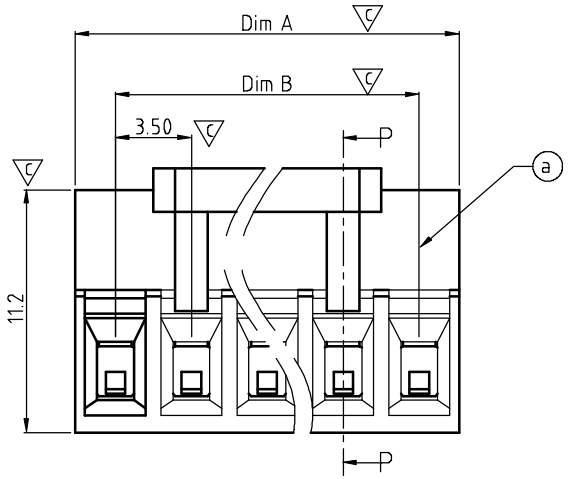

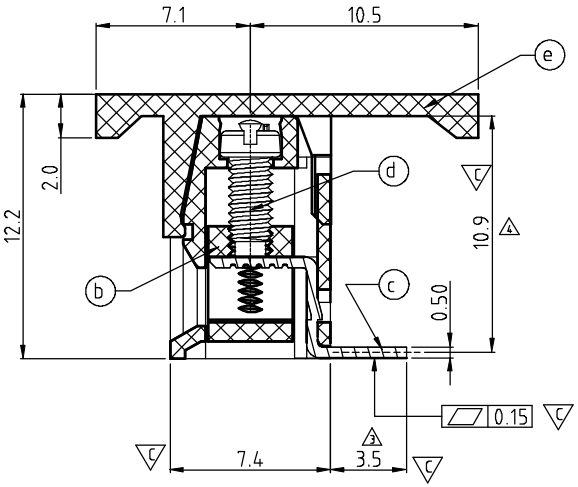

SECTION P-P

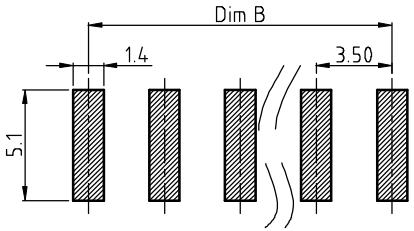

P.C.B. LAYOUT

Material:

- Item ⓐ Terminal housing: LCP (UL94V−0)
- Item ⓑ Clamp: Brass ,Ni plated
- Item ⓒ Wire guard solder pin: Brass ,Tin plated
- Item ⓓ Terminal screw: Steel Zinc plating "-" slot type
- Item ⓔ Terminal Cover: LCP (UL94V−0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-30
- Stranded wire(AWG): 16-30
- Torque: 1.7 Lb-In
- Screw: M2.0
- Wire strip length: 4-5mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Reflow soldering temperature: 260°C/10 Sec max
- Safety Approval: cULus
- Critical dimension: C

TZ xx 21 x 3 xxxx G

No. of poles
02 2 POLES
03 3 POLES
... ...
16 16 POLES

0 Black (RAL9005)

RoHS compliant (lead<4%) In copper Alloy

B000:"@"Logo (Standard)
B00A:"ANYTEK"Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TZ-3.5mm Series 2P-16P Without pillar (With cover & tape reel)				
PART NO.	TZxx21x3xxxxG			DWG NO.	8TZ0203
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Evan 2014.09.22	Evan 2014.09.22	UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D	X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9