

|            |                     |
|------------|---------------------|
| APK3020EC  | HIGH EFFICIENCY RED |
| APK3020SGC | SUPER BRIGHT GREEN  |
| APK3020YC  | YELLOW              |

### Features

- 3.0mmX2.0mm SMTLED, 1.3mm THICKNESS.
- LOW POWER CONSUMPTION.
- WIDE VIEWING ANGLE.
- IDEAL FOR BACKLIGHT AND INDICATOR.
- VARIOUS COLORS AND LENS TYPES AVAILABLE.
- PACKAGE:2000PCS/REEL


### Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

### Package Dimensions

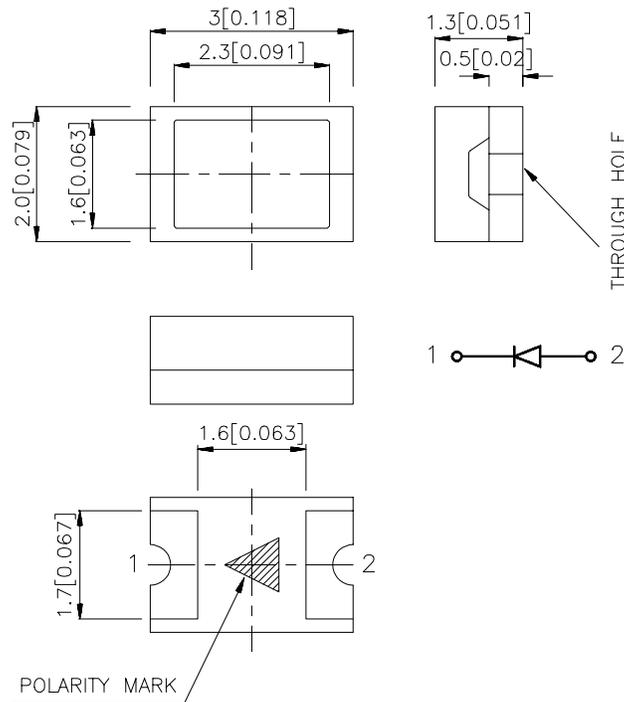

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.2$  (0.0079") unless otherwise noted.
3. Lead spacing is measured where the lead emerge package.
4. Specifications are subject to change without notice.

## Selection Guide

| Part No.   | Dice                           | Lens Type   | Iv (mcd)<br>@ 20 mA |      | Viewing<br>Angle |
|------------|--------------------------------|-------------|---------------------|------|------------------|
|            |                                |             | Min.                | Typ. | 2θ1/2            |
| APK3020EC  | HIGH EFFICIENCY RED(GaAsP/GaP) | WATER CLEAR | 8                   | 30   | 120°             |
| APK3020SGC | SUPER BRIGHT GREEN (GaP)       | WATER CLEAR | 8                   | 30   | 120°             |
| APK3020YC  | YELLOW (GaAsP/GaP)             | WATER CLEAR | 4                   | 15   | 120°             |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

## Electrical / Optical Characteristics at T<sub>A</sub>=25°C


| Symbol            | Parameter               | Device  | Typ.              | Max.              | Units | Test Conditions |
|-------------------|-------------------------|---|-------------------|-------------------|-------|-----------------|
| λ <sub>peak</sub> | Peak Wavelength         | High Efficiency Red<br>Super Bright Green<br>Yellow | 627<br>565<br>590 |                   | nm    | IF=20mA         |
| λ <sub>D</sub>    | Dominate Wavelength     | High Efficiency Red<br>Super Bright Green<br>Yellow | 625<br>568<br>588 |                   | nm    | IF=20mA         |
| Δλ <sub>1/2</sub> | Spectral Line Halfwidth | High Efficiency Red<br>Super Bright Green<br>Yellow | 45<br>30<br>35    |                   | nm    | IF=20mA         |
| C                 | Capacitance             | High Efficiency Red<br>Super Bright Green<br>Yellow | 15<br>15<br>20    |                   | pF    | VF=0V;f=1MHz    |
| V <sub>F</sub>    | Forward Voltage         | High Efficiency Red<br>Super Bright Green<br>Yellow | 2.0<br>2.2<br>2.1 | 2.5<br>2.5<br>2.5 | V     | IF=20mA         |
| I <sub>R</sub>    | Reverse Current         | High Efficiency Red<br>Super Bright Green<br>Yellow |                   | 10                | μA    | VR = 5V         |

## Absolute Maximum Ratings at T<sub>A</sub>=25°C





| Parameter                | High Efficiency red | Super Bright Green | Yellow | Units |
|--------------------------|---------------------|--------------------|--------|-------|
| Power dissipation        | 105                 | 105                | 105    | mW    |
| DC Forward Current       | 30                  | 25                 | 30     | mA    |
| Peak Forward Current [1] | 160                 | 140                | 140    | mA    |
| Reverse Voltage          | 5                   | 5                  | 5      | V     |
| Operating Temperature    | -40°C To +85°C      |                    |        |       |
| Storage Temperature      | -40°C To +85°C      |                    |        |       |

Note:





1. 1/10 Duty Cycle, 0.1ms Pulse Width.

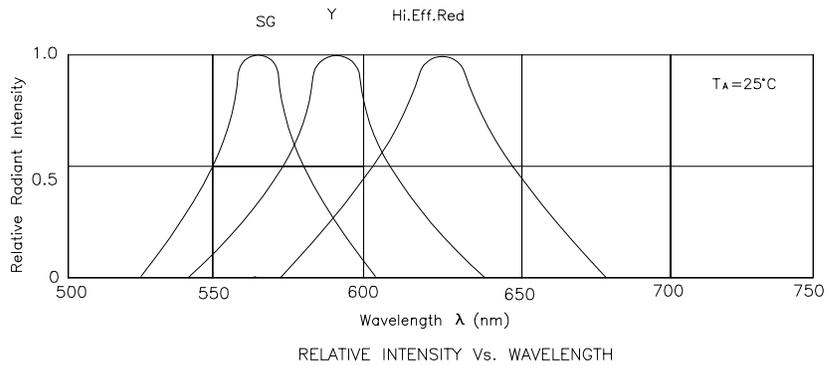





## High Efficiency Red APK3020EC

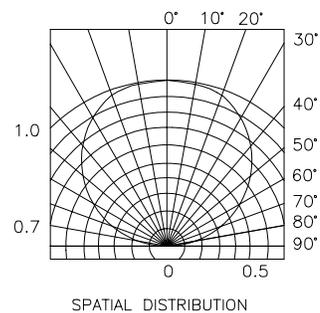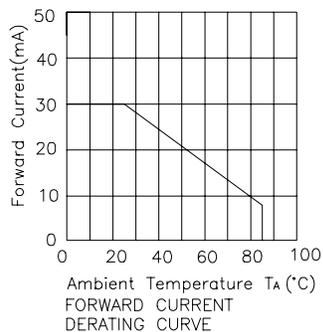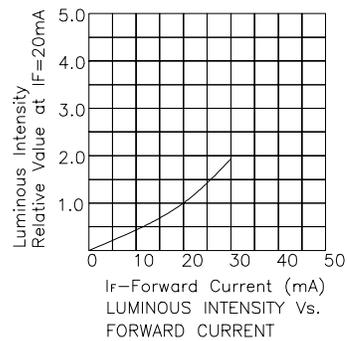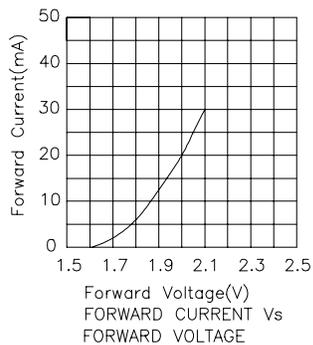

## Super Bright Green APK3020SGC

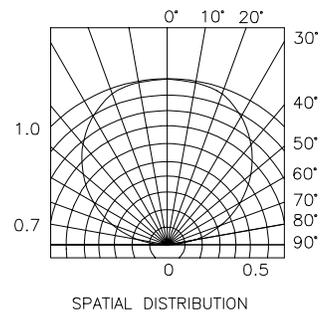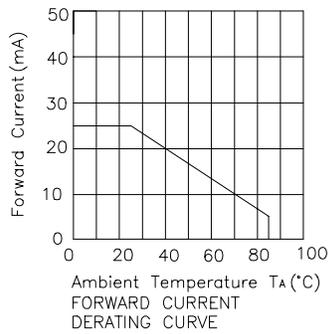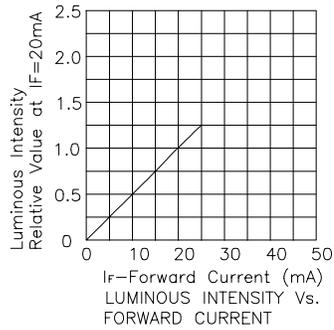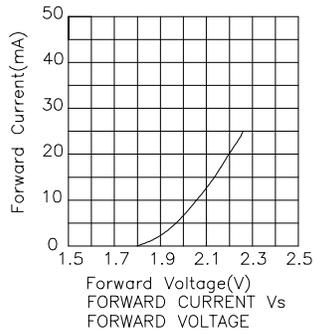


## Yellow APK3020YC

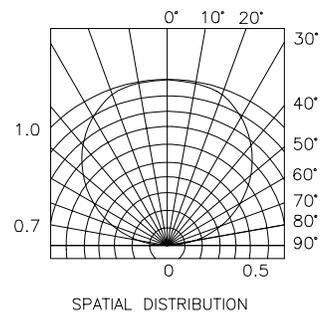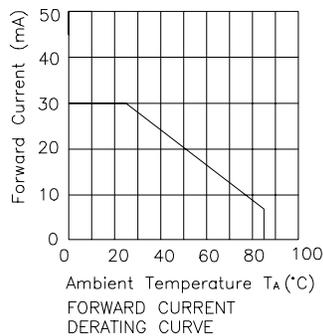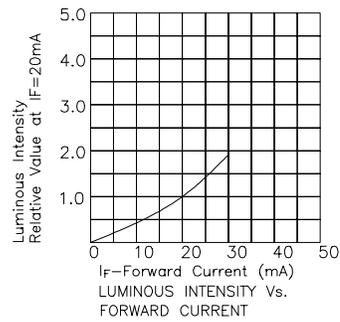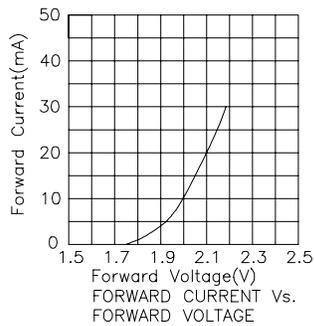


## APK3020 SMT Reflow Soldering Instructions


Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and second soldering process.

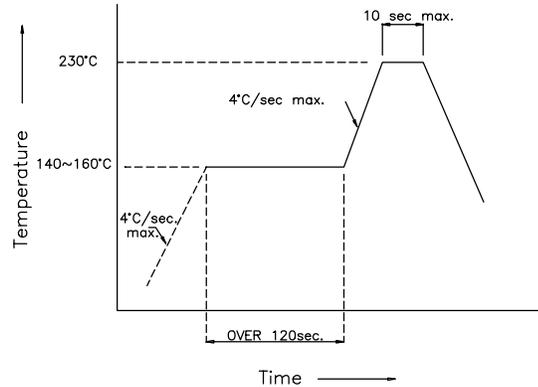

## Recommended Soldering Pattern (Units : mm)

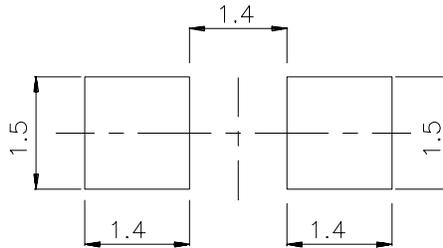

## Tape Specifications (Units : mm)

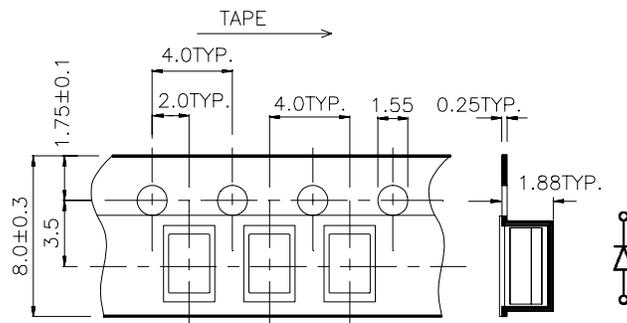

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9