





Standard Recovery Rectifier, High Voltage Surface Mount

eSMP® Series



SMF (DO-219AB)



23020

FEATURES

- For surface mounted applications
- Low profile package
- Ideal for automated placement
- Glass passivated
- High temperature soldering: 260 °C / 10 s at terminals
- Wave and reflow solderable
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

MECHANICAL DATA

Case: SMF (DO-219AB)

Polarity: band denotes cathode end

Weight: approx. 15 mg

Packaging codes / options:

18/10K per 13" reel (8 mm tape), 50K/box

08/3K per 7" reel (8 mm tape), 30K/box

Circuit configuration: single

DESIGN SUPPORT TOOLS

[click logo to get started](#)


PARTS TABLE

PART	ORDERING CODE	MARKING	REMARKS
S1FLB-M	S1FLB-M-18 or S1FLB-M-08	HB	Tape and reel
S1FLD-M	S1FLD-M-18 or S1FLD-M-08	HD	Tape and reel
S1FLG-M	S1FLG-M-18 or S1FLG-M-08	HG	Tape and reel
S1FLJ-M	S1FLJ-M-18 or S1FLJ-M-08	HJ	Tape and reel
S1FLK-M	S1FLK-M-18 or S1FLK-M-08	HK	Tape and reel
S1FLM-M	S1FLM-M-18 or S1FLM-M-08	HM	Tape and reel

ABSOLUTE MAXIMUM RATINGS (T_{amb} = 25 °C, unless otherwise specified)

PARAMETER	TEST CONDITION	PART	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage		S1FLB-M	V _{RRM}	100	V
		S1FLD-M	V _{RRM}	200	V
		S1FLG-M	V _{RRM}	400	V
		S1FLJ-M	V _{RRM}	600	V
		S1FLK-M	V _{RRM}	800	V
		S1FLM-M	V _{RRM}	1000	V
Maximum RMS voltage		S1FLB-M	V _{RMS}	70	V
		S1FLD-M	V _{RMS}	140	V
		S1FLG-M	V _{RMS}	280	V
		S1FLJ-M	V _{RMS}	420	V
		S1FLK-M	V _{RMS}	560	V
		S1FLM-M	V _{RMS}	700	V
Maximum DC blocking voltage		S1FLB-M	V _{DC}	100	V
		S1FLD-M	V _{DC}	200	V
		S1FLG-M	V _{DC}	400	V
		S1FLJ-M	V _{DC}	600	V
		S1FLK-M	V _{DC}	800	V
		S1FLM-M	V _{DC}	1000	V
Maximum average forward rectified current	T _L = 75 °C ⁽¹⁾		I _{F(AV)}	1.5	A
	T _A = 25 °C ⁽¹⁾ at R _{thJA} < 110 K/W		I _{F(AV)}	1	A
	T _A = 65 °C ⁽¹⁾		I _{F(AV)}	0.7	A
Peak forward surge current 8.3 ms half sine-wave	T _L = 25 °C		I _{FSM}	22	A

Note

⁽¹⁾ Averaged over any 20 ms period



THERMAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Thermal resistance junction to ambient air ⁽¹⁾		R_{thJA}	180	K/W
Operating junction and storage temperature range		T_j, T_{stg}	-55 to +150	$^{\circ}\text{C}$

Note

⁽¹⁾ Mounted on epoxy substrate with 3 mm x 3 mm Cu pads ($\geq 40\text{ }\mu\text{m}$ thick)

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)							
PARAMETER	TEST CONDITION	PART	SYMBOL	MIN.	TYP.	MAX.	UNIT
Instantaneous forward voltage	1 A ⁽¹⁾	S1FLB-M	V_F			1.1	V
		S1FLD-M	V_F			1.1	V
		S1FLG-M	V_F			1.1	V
		S1FLJ-M	V_F			1.1	V
		S1FLK-M	V_F			1.1	V
		S1FLM-M	V_F			1.1	V
Maximum DC reverse current at rated DC blocking voltage	$T_A = 25\text{ }^{\circ}\text{C}$	S1FLB-M	I_R			10	μA
		S1FLD-M	I_R			10	μA
		S1FLG-M	I_R			10	μA
		S1FLJ-M	I_R			10	μA
		S1FLK-M	I_R			10	μA
		S1FLM-M	I_R			10	μA
	$T_A = 125\text{ }^{\circ}\text{C}$	S1FLB-M	I_R			50	μA
		S1FLD-M	I_R			50	μA
		S1FLG-M	I_R			50	μA
		S1FLJ-M	I_R			50	μA
		S1FLK-M	I_R			50	μA
		S1FLM-M	I_R			50	μA
Reverse recovery time	$I_F = 0.5\text{ A}, I_R = 1\text{ A}, I_{rr} = 0.25\text{ A}$	S1FLB-M	t_{rr}			1800	ns
		S1FLD-M	t_{rr}			1800	ns
		S1FLG-M	t_{rr}			1800	ns
		S1FLJ-M	t_{rr}			1800	ns
		S1FLK-M	t_{rr}			1800	ns
		S1FLM-M	t_{rr}			1800	ns
Typical capacitance	4 V, 1 MHz	S1FLB-M	C_j		4		pF
		S1FLD-M	C_j		4		pF
		S1FLG-M	C_j		4		pF
		S1FLJ-M	C_j		4		pF
		S1FLK-M	C_j		4		pF
		S1FLM-M	C_j		4		pF

Note

⁽¹⁾ Pulse test: 300 μs pulse width, 1 % duty cycle



TYPICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

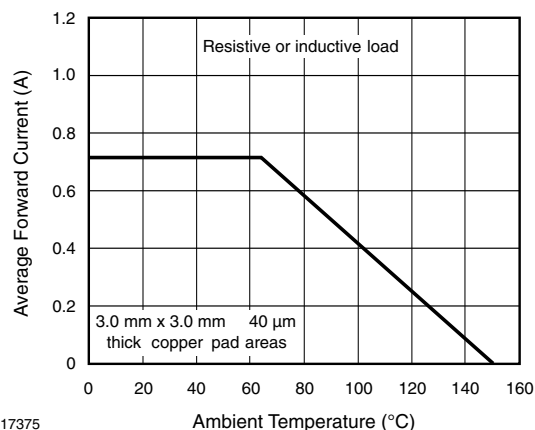


Fig. 1 - Forward Current Derating Curve

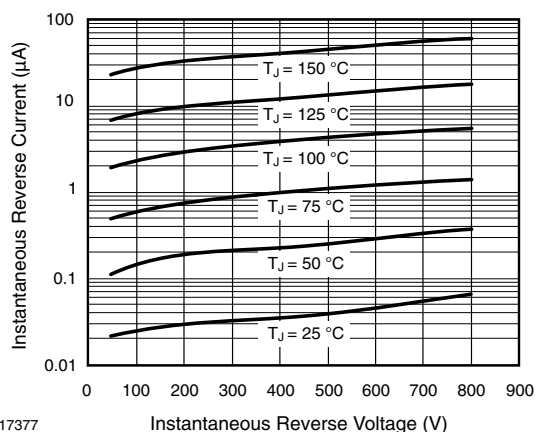


Fig. 3 - Typical Instantaneous Reverse Characteristics

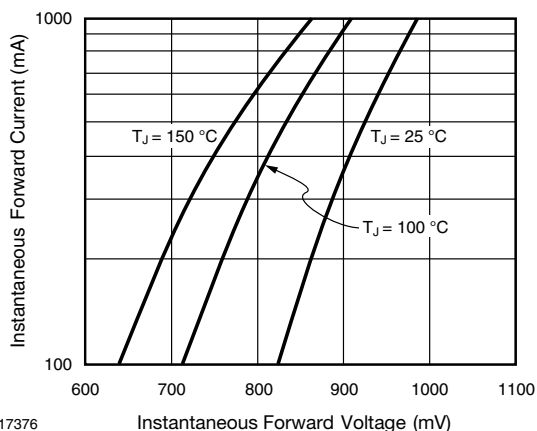


Fig. 2 - Typical Instantaneous Forward Characteristics


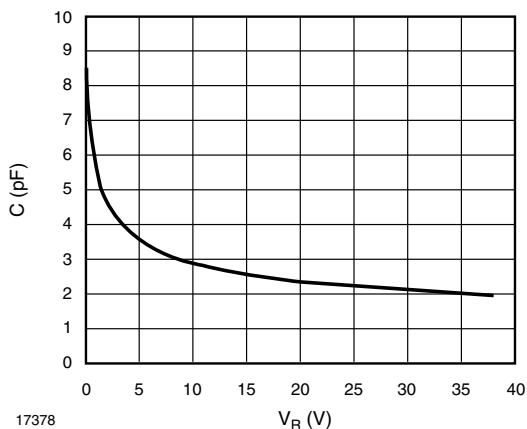



Fig. 4 - Capacitance vs. Reverse Voltage



PACKAGE DIMENSIONS in millimeters (inches): SMF (DO-219AB)

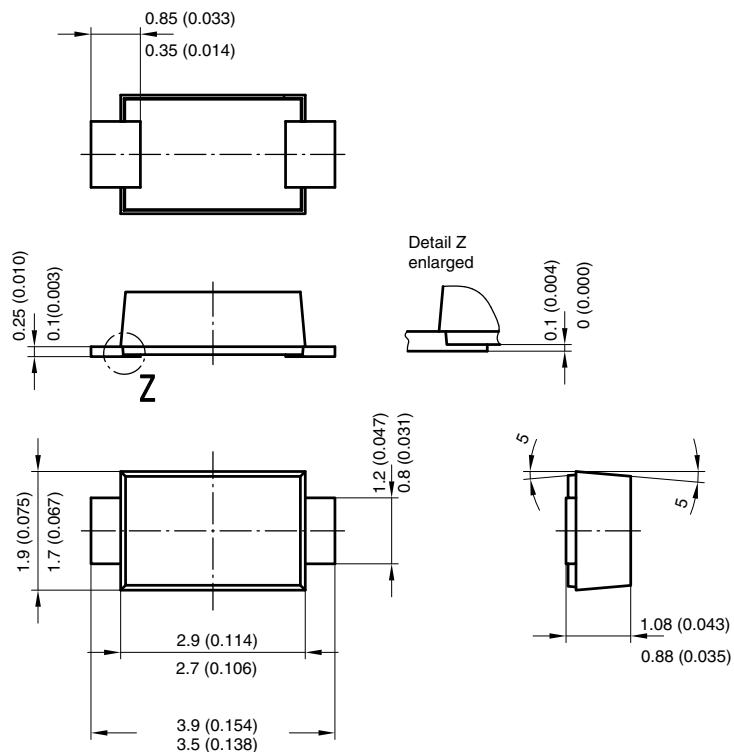


Foot print recommendation:

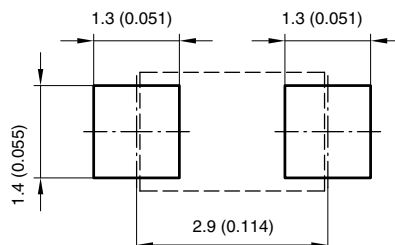

Created - Date: 15. February 2005
Rev. 3 - Date: 13. March 2007
Document no.: S8-V-3915.01-001 (4)
17247



BLISTERTAPE DIMENSIONS in millimeters: **SMF (DO-219AB)**

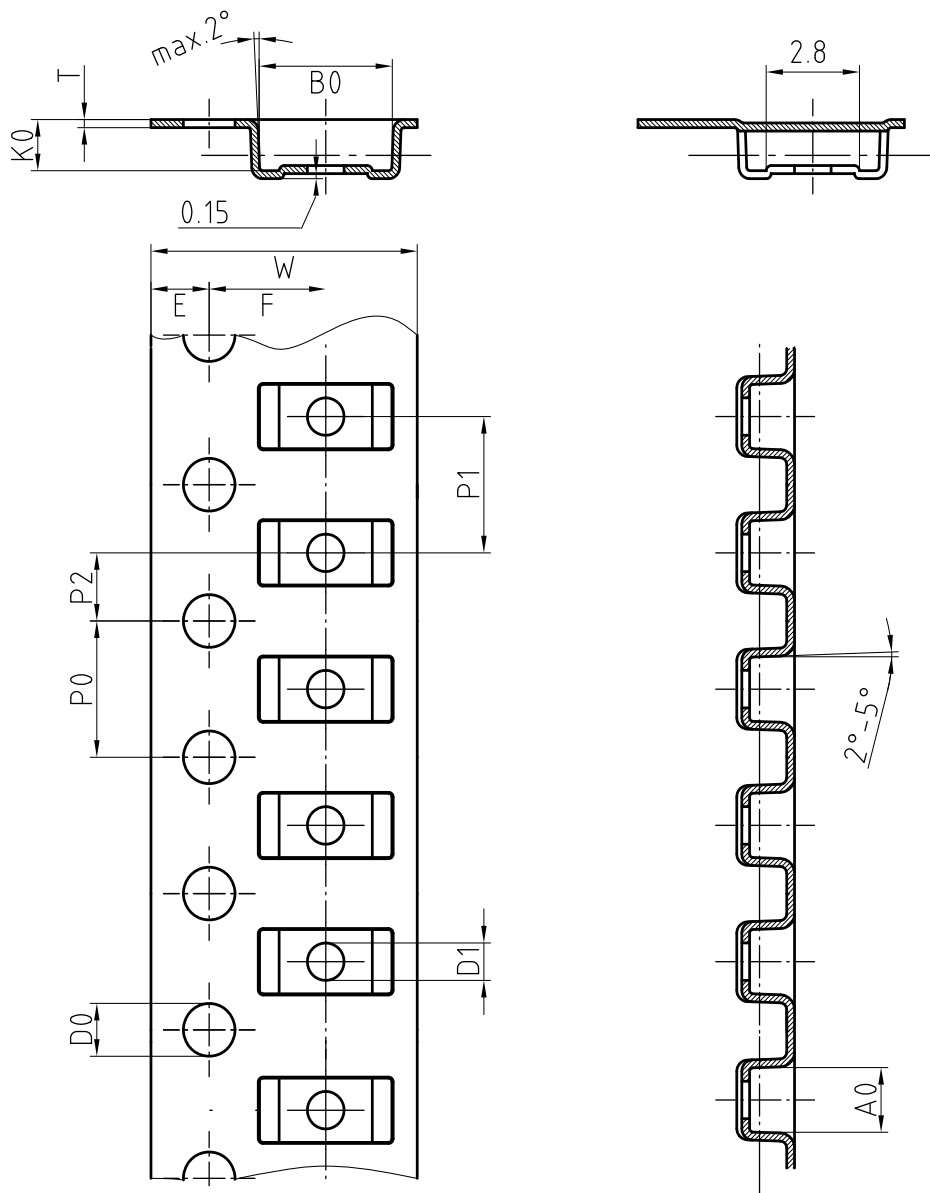


Mat:	A0	B0	K0	W	T	P0	P2	P1	D0	D1	E	F
PS	1.9	4.0	1.5	8.0	0.235	4.0	2.0	4.0	1.5	1	1.75	3.5

Document-No.: S8-V-3717.02-001 (3)

18513



ORIENTATION IN CARRIER TAPE - SMF

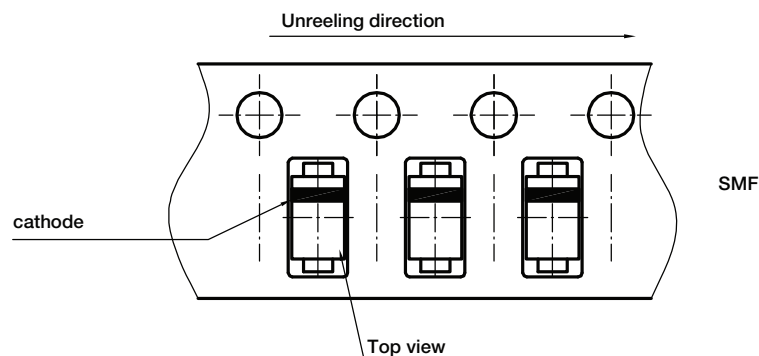

Document no.: S8-V-3717.02-003 (4)
Created - Date: 09. Feb. 2010
22670



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9