

# NPN Silicon Planar High Voltage Transistor

## TO-92



## Pin Definition:

1. Emitter
2. Collector
3. Base

## SOT-223



## Pin Definition:

1. Base
2. Collector
3. Emitter

## PRODUCT SUMMARY

|                            |                                                        |
|----------------------------|--------------------------------------------------------|
| <b>BV<sub>CBO</sub></b>    | 600V                                                   |
| <b>BV<sub>CEO</sub></b>    | 400V                                                   |
| <b>I<sub>C</sub></b>       | 1A                                                     |
| <b>V<sub>CE(SAT)</sub></b> | 0.5V @ I <sub>C</sub> / I <sub>B</sub> = 500mA / 100mA |

## Features

- High BV<sub>ceo</sub>, BV<sub>cbo</sub>
- High current gain

## Structure

- Epitaxial Planar Type

## Ordering Information

| Part No.     | Package | Packing             |
|--------------|---------|---------------------|
| TSC873CT B0G | TO-92   | 1,000pcs / Bulk     |
| TSC873CT A3G | TO-92   | 2,000pcs / Ammo     |
| TSC873CW R0G | SOT-223 | 2,500pcs / 13" Reel |

Note: "G" denote for Halogen Free Product

## Absolute Maximum Rating (Ta = 25°C unless otherwise noted)


| Parameter                                        | Symbol           | Limit        | Unit |
|--------------------------------------------------|------------------|--------------|------|
| Collector-Base Voltage                           | V <sub>CBO</sub> | 600          | V    |
| Collector-Emitter Voltage                        | V <sub>CEO</sub> | 400          | V    |
| Emitter-Base Voltage                             | V <sub>EB</sub>  | 9            | V    |
| Collector Current                                | DC               | 1            | A    |
|                                                  | Pulse            | 2            |      |
| Total Power Dissipation @ T <sub>A</sub> =25°C   | TO-92            | 1            | W    |
|                                                  | SOT-223          | 1.2          |      |
| Operating Junction Temperature                   | T <sub>J</sub>   | +150         | °C   |
| Operating Junction and Storage Temperature Range | T <sub>STG</sub> | - 55 to +150 | °C   |

## Electrical Specifications (Ta = 25°C unless otherwise noted)


| Parameter                            | Conditions                                                                            | Symbol                 | Min | Typ | Max | Unit |
|--------------------------------------|---------------------------------------------------------------------------------------|------------------------|-----|-----|-----|------|
| Collector-Base Breakdown Voltage     | I <sub>E</sub> = 100uA                                                                | BV <sub>CBO</sub>      | 600 | --  | --  | V    |
| Collector-Emitter Breakdown Voltage  | I <sub>C</sub> = 1mA                                                                  | BV <sub>CEO</sub>      | 400 | --  | --  | V    |
| Emitter-Base Breakdown Voltage       | I <sub>E</sub> = 100uA                                                                | BV <sub>EBO</sub>      | 9   | --  | --  | V    |
| Collector-Base Cutoff Current        | V <sub>CB</sub> =600V                                                                 | I <sub>CBO</sub>       | --  | --  | 100 | uA   |
| Collector-Emitter Cutoff Current     | V <sub>CE</sub> = 400V                                                                | I <sub>CEO</sub>       | --  | --  | 1   | mA   |
| Emitter-Base Cutoff Current          | V <sub>EB</sub> =8V                                                                   | I <sub>EBO</sub>       | --  | --  | 100 | uA   |
| Collector-Emitter Saturation Voltage | I <sub>C</sub> = 500mA, I <sub>B</sub> = 100mA                                        | V <sub>CE(SAT)</sub> 1 | --  | --  | 0.5 | V    |
| Collector-Emitter Saturation Voltage | I <sub>C</sub> = 1A, I <sub>B</sub> = 250mA                                           | V <sub>CE(SAT)</sub> 2 | --  | --  | 1   | V    |
| Base-Emitter Saturation Voltage      | I <sub>C</sub> = 500mA, I <sub>B</sub> = 100mA                                        | V <sub>BE(SAT)</sub> 1 | --  | --  | 1   | V    |
| Base-Emitter Saturation Voltage      | I <sub>C</sub> = 1A, I <sub>B</sub> = 250mA                                           | V <sub>BE(SAT)</sub> 2 | --  | --  | 1.2 | V    |
| DC Current Transfer Ratio            | V <sub>CE</sub> = 10V, I <sub>C</sub> = 250mA                                         | h <sub>FE</sub>        | 80  | --  | --  |      |
| Trun-on Time                         | V <sub>CC</sub> =125V, I <sub>C</sub> =1A,<br>I <sub>B1</sub> =I <sub>B2</sub> =200mA | T <sub>ON</sub>        | --  | 1   | --  | uS   |
| Storage Time                         |                                                                                       | T <sub>STG</sub>       | --  | 4   | --  | uS   |
| Fall Time                            |                                                                                       | T <sub>OFF</sub>       | --  | 0.7 | --  | uS   |

**Electrical Characteristics Curve** ( $T_a = 25^\circ\text{C}$ , unless otherwise noted)


**Figure 1. Static Characteristics**

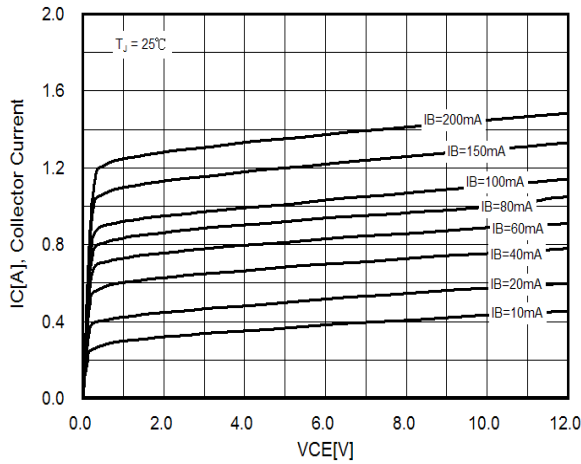


**Figure 2. DC Current Gain**

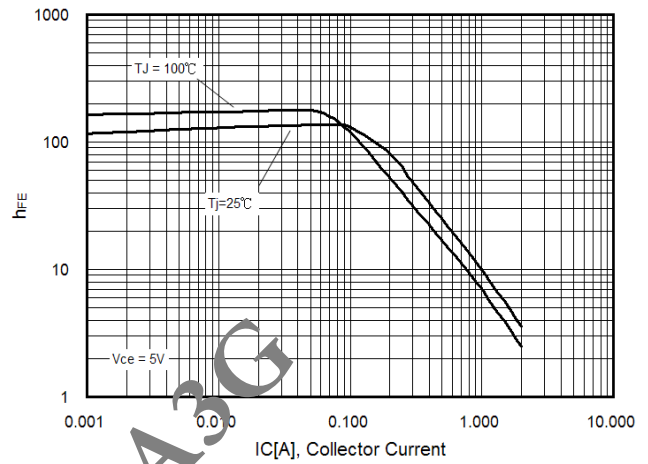


**Figure 3. VCE(sat) v.s. IC**

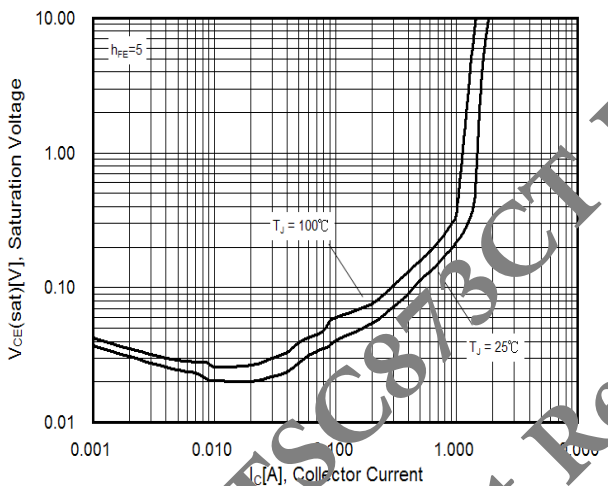


**Figure 4. VBE(sat) vs IC**

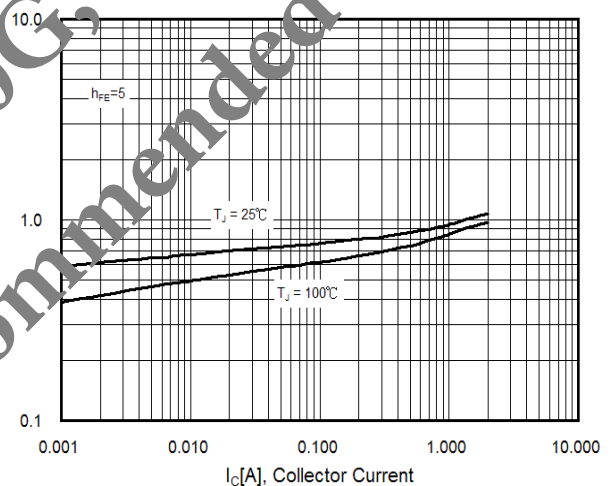


**Figure 5. VBE(on) vs IC**

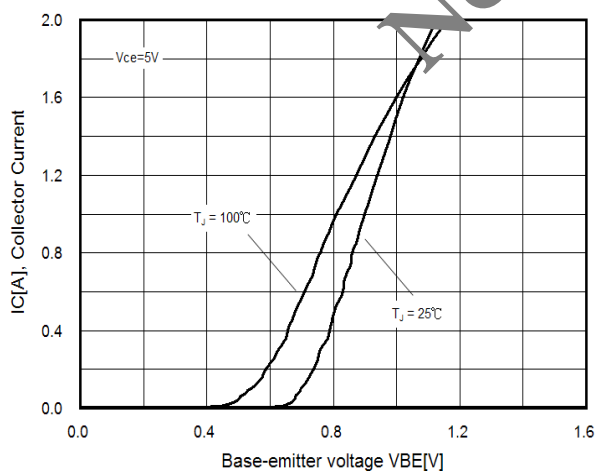

**Figure 6. Safety Operation Area**

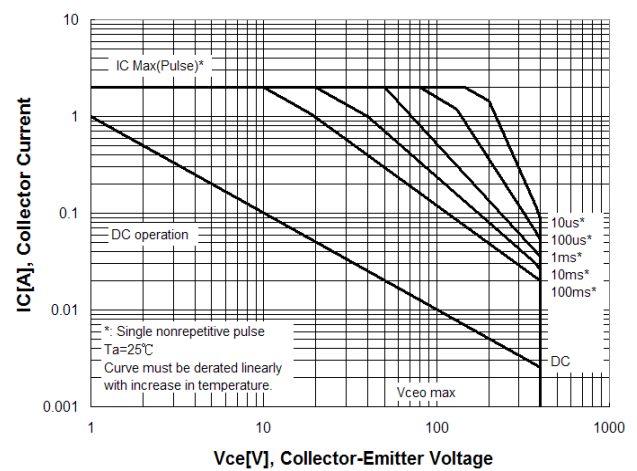


## TO-92 Mechanical Drawing

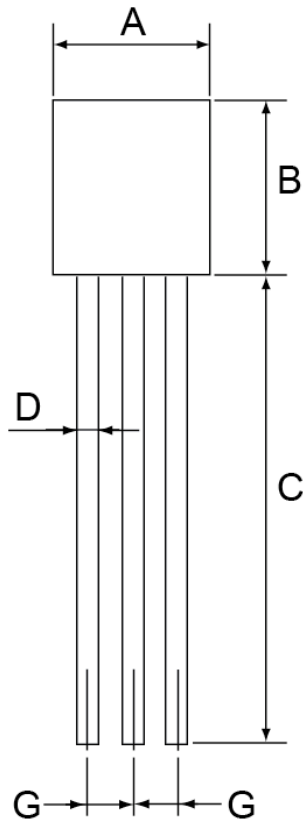

| TO-92 DIMENSION |             |      |            |       |
|-----------------|-------------|------|------------|-------|
| DIM             | MILLIMETERS |      | INCHES     |       |
|                 | MIN         | MAX  | MIN        | MAX   |
| A               | 4.30        | 4.70 | 0.169      | 0.185 |
| B               | 4.30        | 4.70 | 0.169      | 0.185 |
| C               | 14.30(typ)  |      | 0.563(typ) |       |
| D               | 0.43        | 0.49 | 0.017      | 0.019 |
| E               | 1.18        | 1.28 | 0.046      | 0.050 |
| F               | 3.30        | 3.70 | 0.130      | 0.146 |
| G               | 1.27        | 1.31 | 0.05       | 0.051 |
| H               | 0.37        | 0.43 | 0.015      | 0.017 |

## Marking Diagram



**Y** = Year Code

**M** = Month Code for Halogen Free Product

**O** =Jan **P** =Feb **Q** =Mar **R** =Apr


**S** =May **T** =Jun **U** =Jul **V** =Aug

**W** =Sep **X** =Oct **Y** =Nov **Z** =Dec

**L** = Lot Code


#1

## SOT-223 Mechanical Drawing

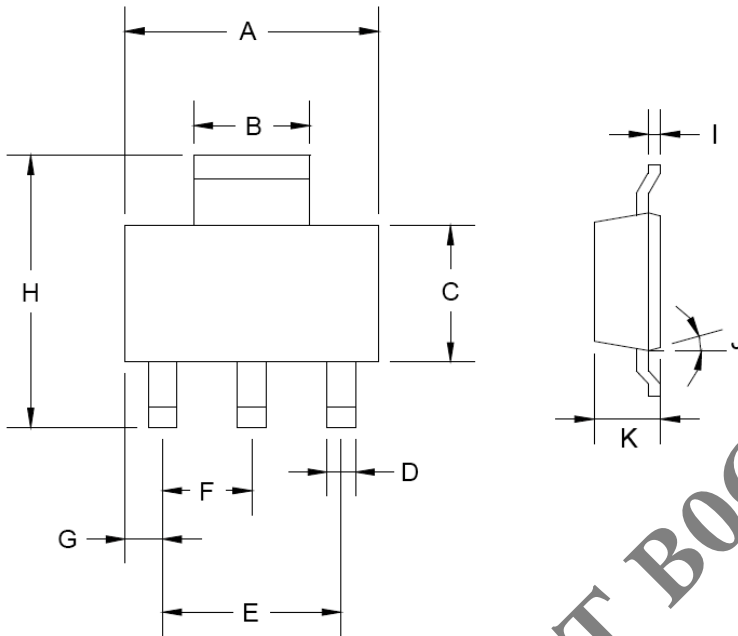

| SOT-223 DIMENSION |             |       |        |       |
|-------------------|-------------|-------|--------|-------|
| DIM               | MILLIMETERS |       | INCHES |       |
|                   | MIN         | MAX   | MIN    | MAX   |
| A                 | 6.350       | 6.850 | 0.250  | 0.270 |
| B                 | 2.900       | 3.100 | 0.114  | 0.122 |
| C                 | 3.450       | 3.750 | 0.136  | 0.148 |
| D                 | 0.595       | 0.635 | 0.023  | 0.025 |
| E                 | 4.550       | 4.650 | 0.179  | 0.183 |
| F                 | 2.250       | 2.350 | 0.088  | 0.093 |
| G                 | 0.635       | 1.035 | 0.032  | 0.041 |
| H                 | 6.700       | 7.300 | 0.263  | 0.287 |
| I                 | 0.250       | 0.355 | 0.010  | 0.014 |
| J                 | 10°         | 16°   | 10°    | 16°   |
| K                 | 1.550       | 1.800 | 0.061  | 0.071 |

## Marking Diagram



**Y** = Year Code  
**M** = Month Code for Halogen Free Product  
**O** = Jan **P** = Feb **Q** = Mar **R** = Apr  
**S** = May **T** = Jun **U** = Jul **V** = Aug  
**W** = Sep **X** = Oct **Y** = Nov **Z** = Dec  
**L** = Lot Code

TSC873CT B0G, A3G  
Not Recommended

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9