96-PIN DIN VME EUROCARD 6U



E160-6U-1 9.19"H x 6.3"L x .062" TH
E220-6U-1 9.19"H x 8.66"L x .062"TH
(233mm x 220mm & 160mm)
0.100" grid in 6U Eurocard size. Pad-Per-Hole pattern both sides with plated-thru holes. Voltage and ground busses on board perimeter both sides. Row and column legends. 0.042" diameter holes.
16 pin DIP Capacity: 100, 140 Socket Pin: R32
WW Terminals: T44, T46, T49, T68
Male Right Angle WW Connector: RE96MWR
Extender: VMEE-M Material: FR-4
Card Cage: CCK160-6U, CCK220-6U



E160-6U-2 9.19"H x 6.3"L x .062" TH
E220-6U-2 9.19"H x 8.66"L x .062"TH
(233mm x 220mm or 160mm)
0.100" grid in 6U Eurocard size. Voltage and ground busses on board perimeter both sides. Row and column legends. Bare inner prototype area with no pads both sides. 0.042" diameter holes.
16 pin DIP Capacity: 100, 140 Socket Pin: R32
WW Terminals: T44, T46, T49, T68
Male Right Angle WW Connector: RE96MWR.
Extender: VMEE-M. Material: FR-4.
Card Cage: CCK160-6U, CCK220-6U

96-PIN DIN EUROCARD 6U



E160-6U-3 9.19"H x 6.3"L x .062" TH
E220-6U-3 9.19"H x 8.66"L x .062"TH
(233mm x 220mm or 160mm)
0.100" grid in 6U Eurocard size. Overall voltage ground plane with no pads or busses on either side provide excellent shielding and power distribution. Row and column legends. To simulate plated-thru holes committed to voltage or ground planes, use Vector T123 eyelets. To commit Wire Wrap pins to voltage or ground planes, use Vector T124 solder washers 0.055" diameter holes.
16 pin DIP Capacity:105, 168 Socket Pin: R32, R53 Male Right Angle WW Connector: RE96MWR. Extender: VMEE-M. Material: FR-4
Card Cage: CCK160-6U, CCK220-6U



4615 9.19"H x 6.3"L x .062" TH
(233.4mmx160mm)
0.100" grid in 6U Eurocard size (9.19" x 6.3"),
3-Hole Solder Pad (0.28" x 0.080")
.042" holes plated thru on 2 sides
16-Pin DIP= 50
Material: FR4 Epoxy Glass
WW Terminals: T44, T46, T49, T68
WW Socket Pin: R32
Rec.Card Cage:CCK160-6U
96-Pin Din Connector: RE96MWR

160-PIN VME64X EUROCARD

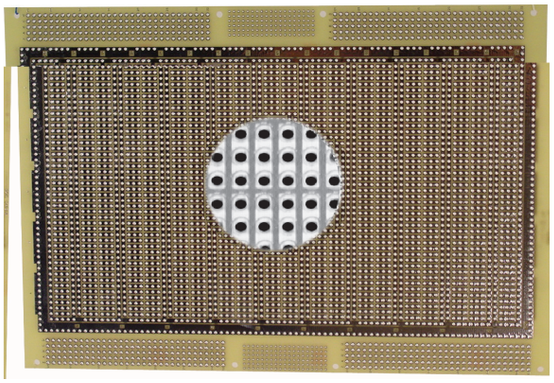

4616 9.19"H x 6.3"L x .062"TH
(233mm x160mm)
4616P3 With P1, P2, P0 connectors
(installed on back of card)
0.100" grid in 6U Eurocard size. Three-hole solder pad (0.28" x 0.080") pattern both sides with plated-thru holes. Interleaved busses on both sides, back to back. .042" diameter holes and column legends. Green soldermask board has mounting for 5-row P1 and P2 VME64X connectors and 6-row HM P0 connectors. Both can mount on front OR back of card

16-Pin DIP= 50 Material:
WW Terminals: T44, T46, T49, T68
WW Socket Pin: R32
Male Right Angle WW Connector: RE96MWR
Card Cage:CCK28-84-00

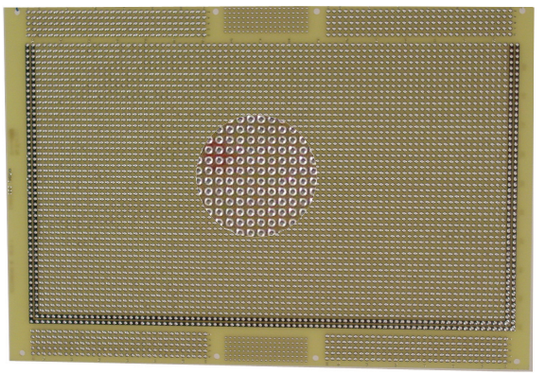

4616-1 9.19"H x 6.3"L x .062"TH
(233mm x160mm)
4616-1P3 With P1, P2, P0 connectors
(installed on back of card)
0.100" grid in 6U Eurocard size. Pad-Per-Hole pattern both sides with plated-thru holes. Voltage and ground busses on board perimeter both sides. Column legends.

0.042" diameter holes.
16-Pin DIP= 100 Material:
WW Terminals: T44, T46, T49, T68
WW Socket Pin: R32
Male Right Angle WW Connector:
RE96MWR
Card Cage:CCK28-84-00

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9