



Test Procedure for the LV8498CTGEVK Evaluation Kit

For AF-VCM control

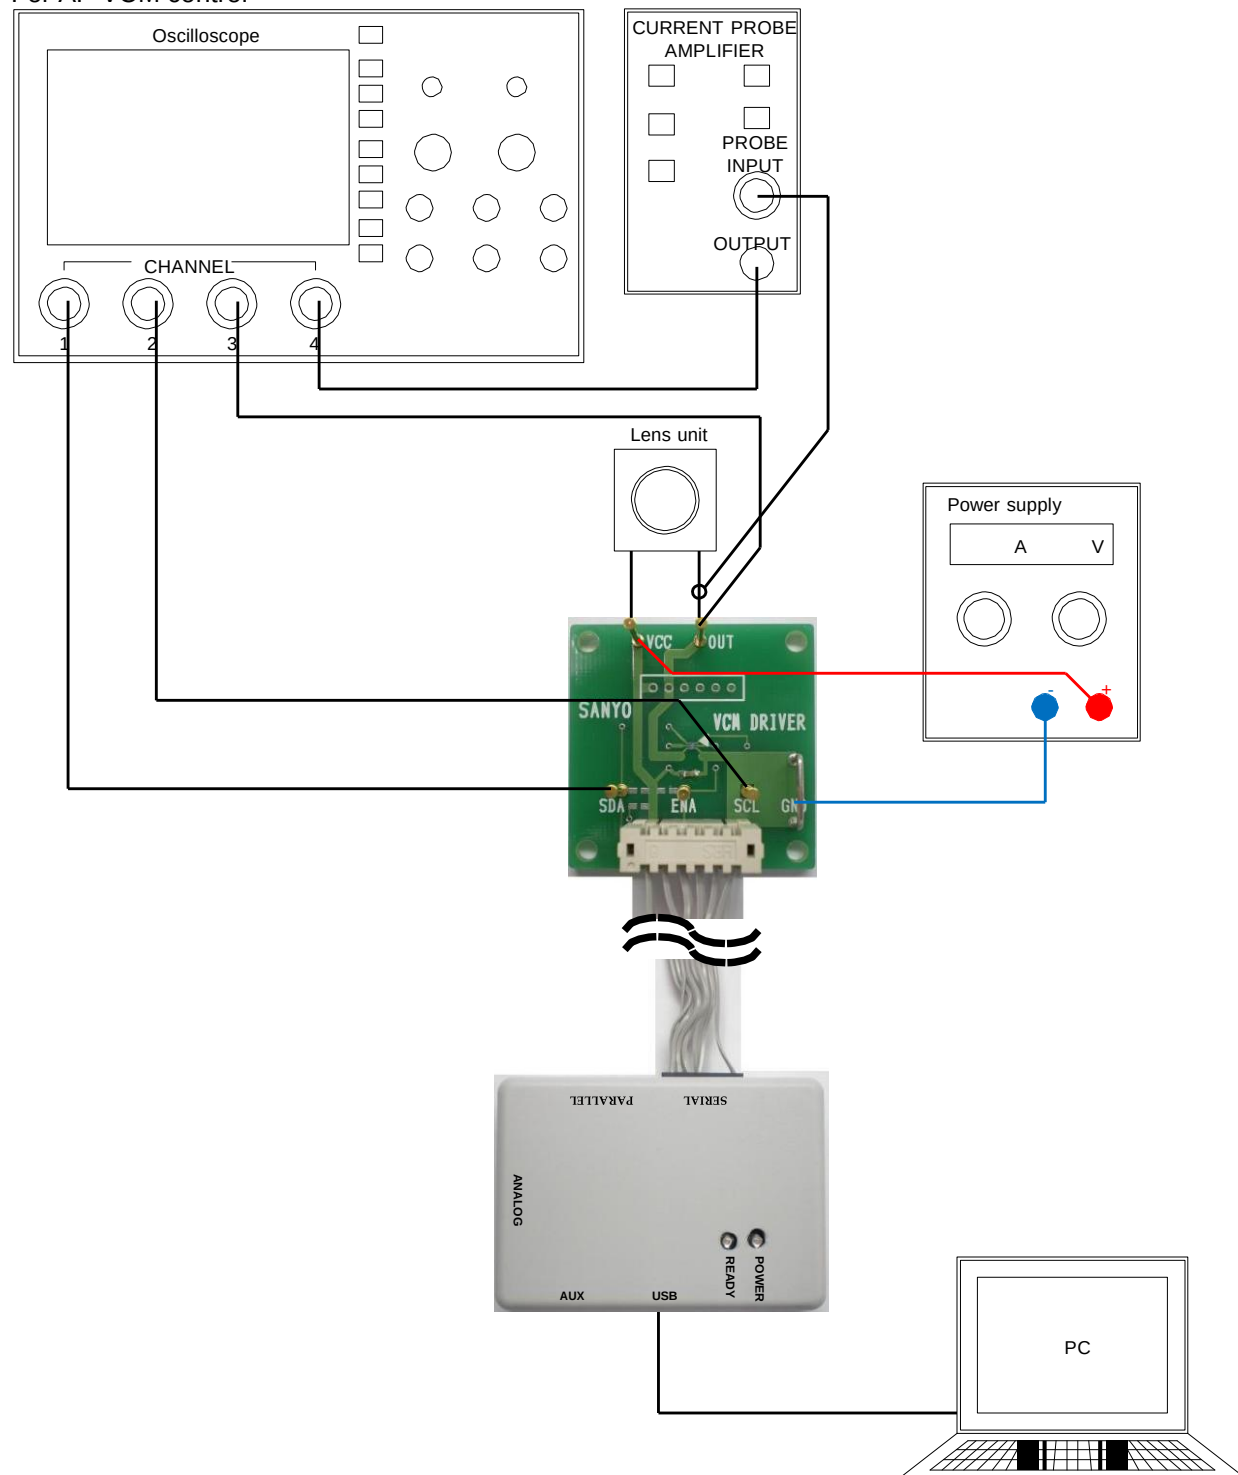


Figure 1. Setup for AF-VCM control

**Table1: Required Equipment**

Equipment	Efficiency
Power supply	5V-0.5A
Oscilloscope	4 channel
Current probe	
LV8099CT Evaluation Board	LV8498CTGEVB
USB adapter	USBADAPTORGK
Cable for USB adapter	LV8483CSCBLGEVK
USB cable	Type mini-B
Lens unit	5V-200mA

Allowable Operating Ratings

Power supply voltage (V_{CC}): 2.2 to 5.0V

Coil resistance of VCM:

$$R_{AF} + RTTL < V_{CC} / I_{OUT}$$

(R_{AF} : Coil resistance of VCM, $RTTL$: combination of Output ON resistor and sense resistor,
 I_{OUT} : Output current)

In case of $V_{CC}=2.8V$

$$R_{AF} < V_{CC} / I_{AF} - RTTL$$


$$< 2.8V / 120mA - 3 \Omega$$

$$< 20.3 \Omega$$

Test Procedure


- Connect AF-VCM with OUT and V_{CC} .
- Connect a power supply with V_{CC} pin.
Connect GND line with GND pin.
- If you use the master device we provided, connect USB adapter with the evaluation board.
If you have the original master device, connect I²C lines with SDA and SCL pin.
Check if pull-up resistors have been connected to the lines. If not, mount R1 and R2 on the evaluation board.
- The USB adapter we provided has built-in resistors. Therefore, you do not need to mount any resistor.
- Check the ENA pin is not OPEN. And supply power.
After powered, if the ENA pin is pull-down, input High signal to the pin.
If the pin is pull-up, transfer zero-code to all data.
- If you use the master device we provided, refer to manual below.
If you have the original master device, refer to "Description of Operation" from P. and make I²C program.
- Check the drive signals and output current waveforms in the scope if they are similar to the charts.

(1) Window setup details

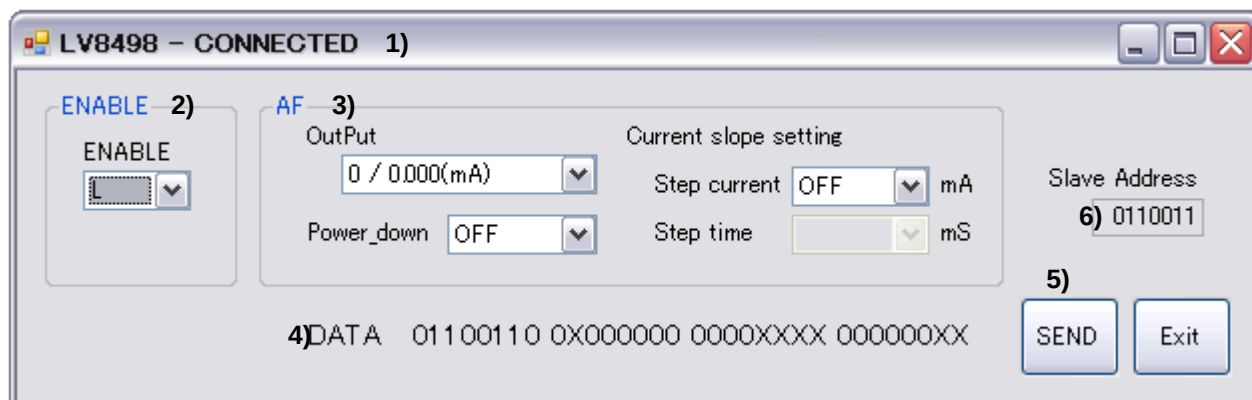


- 1) Connection status of I²C transmission board
 "CONNECTED" = I²C transmission board is connected with PC properly via USB cable.
 "DISCONNECTED" = I²C transmission board is not connected with PC.
- 2) Chip enable setup
 Select L (standby) or H (active).
- 3) Output setup
 Select a setting value from the pulldown menu.
- 4) I²C data display
 Displays I²C data based on the setting value of 3).
- 5) Data transfer button
 After all the parameter setups are completed, click this button.
- 6) Slave address display
 The slave address transferred from this software is fixed to "0110011" from LV8498CT that cannot be modified.


(2) Function setup

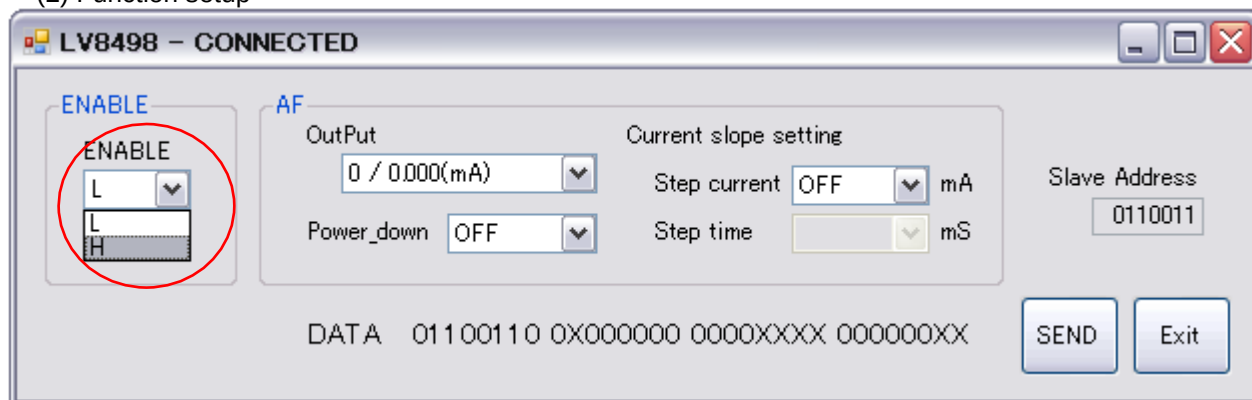


To startup the IC, select H in the "ENABLE".
 As soon as H is selected, ENABLE signal is output.
 To set to standby, select L.

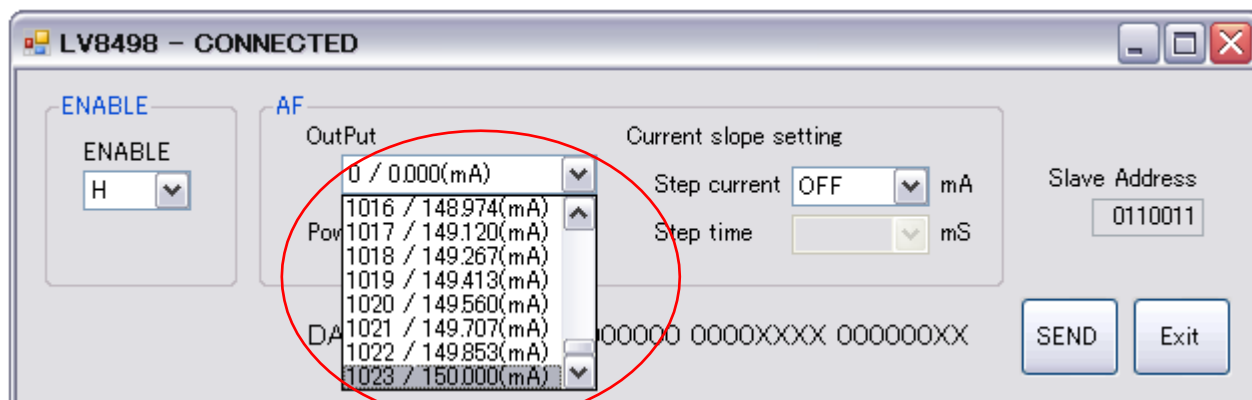


From "Output" pulldown menu, select an output current value between 0mA and 150mA.
When 0mA is selected, the drive circuit is set to standby mode.

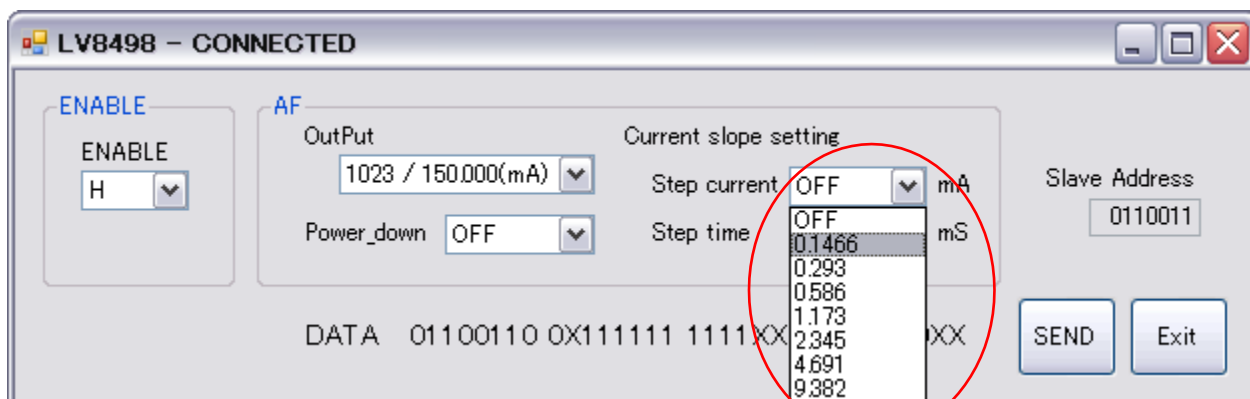

Select "Step current" from 8 values.
When OFF is selected, current slope function does not operate.
As a result, current value changes rapidly to the selected output current.

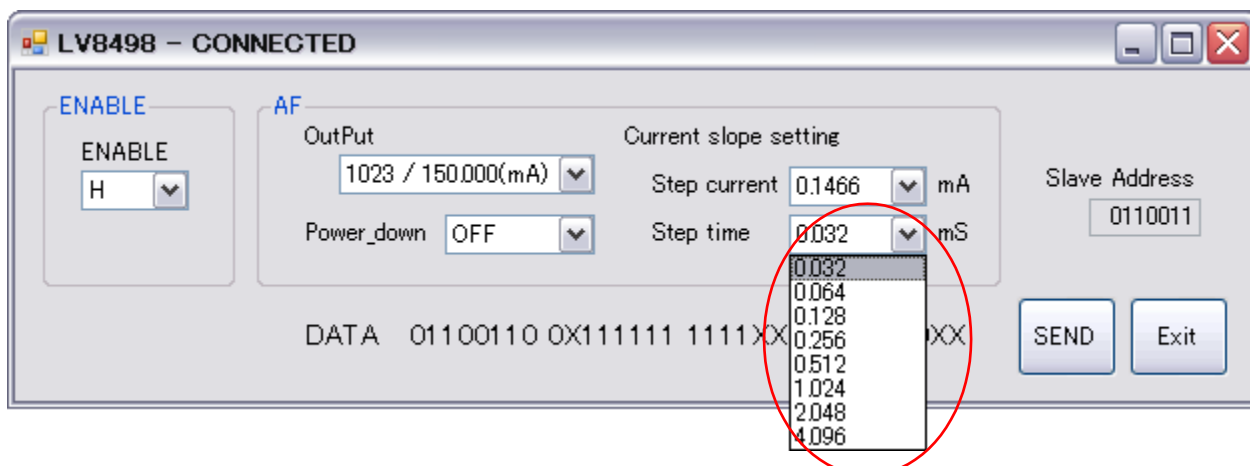

If you select other than OFF for "Step current", select "Step time" from the pulldown menu.

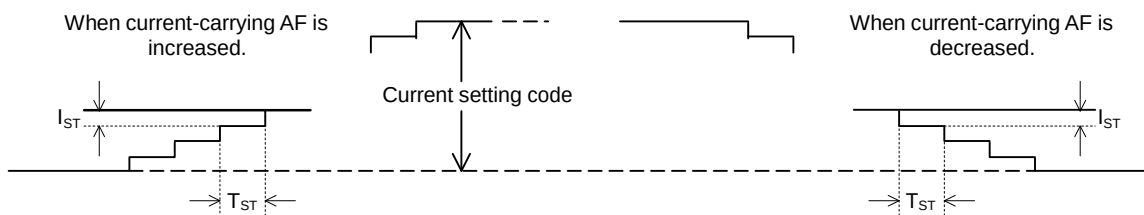

“Step current” : I_{ST} shown in the above chart


“Step time” : T_{ST} shown in the above chart

To drive VCM, set “OFF”(=0) for “Power_down”.

Also by setting “Power_down”=“ON”(=1), standby mode is set forcibly regardless of the setting value of “Output”.

In this case, current decreases according to the setting value of “Current slope setting”.

To change or transfer setting values besides ENABLE, click SEND button to output I²C signal.

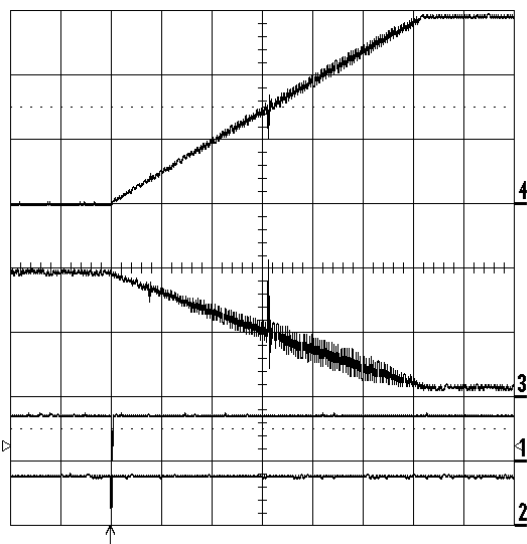


Waveform when it drives from 0 code to Full code

4ch: IOUT
(50mA/DIV)


3ch: VOOUT
(2V/DIV)

1ch: VSDA
(5V/DIV)

2ch: VSCL
(5V/DIV)

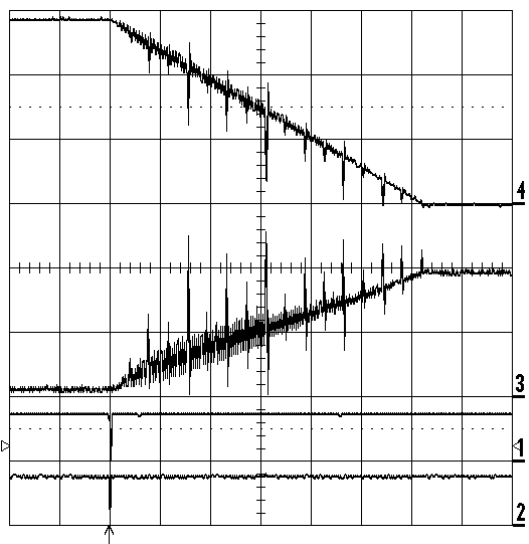

Waveform when it drives from Full code to 0 code

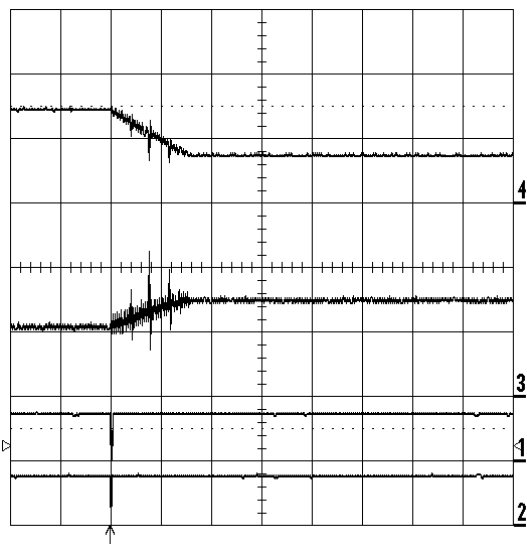


Waveform when it drives from code 256 to code 511

4ch: IOUT
(50mA/DIV)

3ch: VOOUT
(2V/DIV)

1ch: VSDA
(5V/DIV)

2ch: VSCL
(5V/DIV)

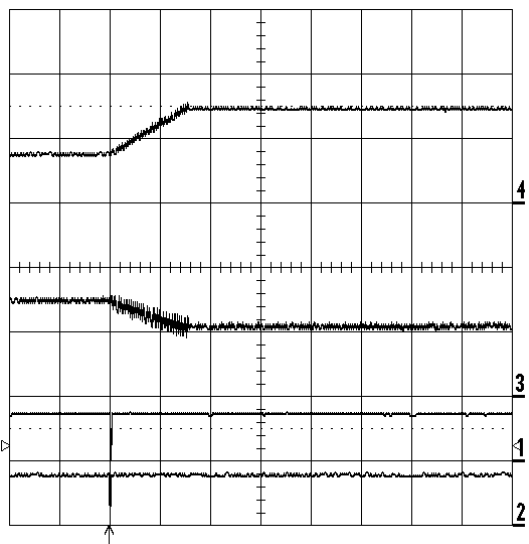

Waveform when it drives from code 511 to code 256

*) Time range of all waveforms are 5 mSec/DIV.

*) Current slope setting of all waveforms are

Step time: 0.032 mSec

Step current: 0.0978 mA

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9