



## Surface Mount 1500 Watt Transient Voltage Suppressor

### DESCRIPTION

The MSMCG(J)5.0A through MXLSMCG(J)170A series of 1500 watt high-reliability Transient Voltage Suppressors (TVSs) protects a variety of voltage-sensitive components. The SMCJ gull-wing design in the DO-215AB package allows for visible solder connections. The SMCJ J-bend design in the DO-214AB package allows for greater PC board mounting density. Selections include unidirectional and bidirectional as well as RoHS compliant versions. These are available with a variety of upscreening options for enhanced reliability. They can protect against the secondary effects of lightning per IEC61000-4-5 and against voltage pulses from inductive switching environments and induced by RF radiation. Since their response time is virtually instantaneous, they can also be used in protection from ESD and EFT per IEC61000-4-2 and IEC61000-4-4.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.


### FEATURES

- High reliability devices with fabrication and assembly lot traceability.
- All devices are 100% surge tested.
- 3 $\sigma$  lot norm screening performed on standby current ( $I_D$ ).
- Available in both unidirectional and bidirectional versions.
- Moisture classification is "Level 1" with no dry pack required per IPC/JEDEC J-STD-020B.
- Enhanced reliability screening options are available in reference to MIL-PRF-19500. Refer to [High Reliability Up-Screened Plastic Products Portfolio](#) for more details on the screening options. (See [part nomenclature](#) for all available options).
- RoHS compliant versions available.
- Axial-lead equivalent packages for thru-hole mounting are available as 1.5KE6.8A to 1.5KE200CA or 1N6267 thru 1N6303A and 1N5908 (contact Microsemi for other surface mount options).

### APPLICATIONS / BENEFITS

- High-reliability devices.
- Selections for 5.0 to 170 volts standoff voltages ( $V_{WM}$ ).
- Protection from switching transients and induced RF.
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4.
- Secondary lightning protection per IEC61000-4-5 with 42 ohms source impedance:
  - Class 1: MSMC 5.0A to MXLSMC 170A or CA
  - Class 2: MSMC 5.0A to MXLSMC 150A or CA
  - Class 3: MSMC 5.0A to MXLSMC 75A or CA
  - Class 4: MSMC 5.0A to MXLSMC 36A or CA
- Secondary lightning protection per IEC61000-4-5 with 12 ohms source impedance:
  - Class 1: MSMC 5.0A to MXLSMC 90A or CA
  - Class 2: MSMC 5.0A to MXLSMC 45A or CA
  - Class 3: MSMC 5.0A to MXLSMC 24A or CA
  - Class 4: MSMC 5.0A to MXLSMC 11A or CA
- Secondary lightning protection per IEC61000-4-5 with 2 ohms source impedance:
  - Class 2: MSMC 5.0A to MXLSMC 22A or CA
  - Class 3: MSMC 5.0A to MXLSMC 10A or CA

Screening in  
reference to  
MIL-PRF-19500  
available



**DO-215AB  
(SMCG) Package**



**DO-214AB  
(SMCJ) Package**

NOTE: All SMC series are  
equivalent to prior SMM package  
identifications.

Also available:

**Commercial grade**  
 [SMCG\(J\)5.0A –](#)  
[SMCG\(J\)170CAe3](#)

#### MSC – Lawrence

6 Lake Street,  
Lawrence, MA 01841  
Tel: 1-800-446-1158 or  
(978) 620-2600  
Fax: (978) 689-0803

#### MSC – Ireland

Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298

**Website:**

[www.microsemi.com](http://www.microsemi.com)

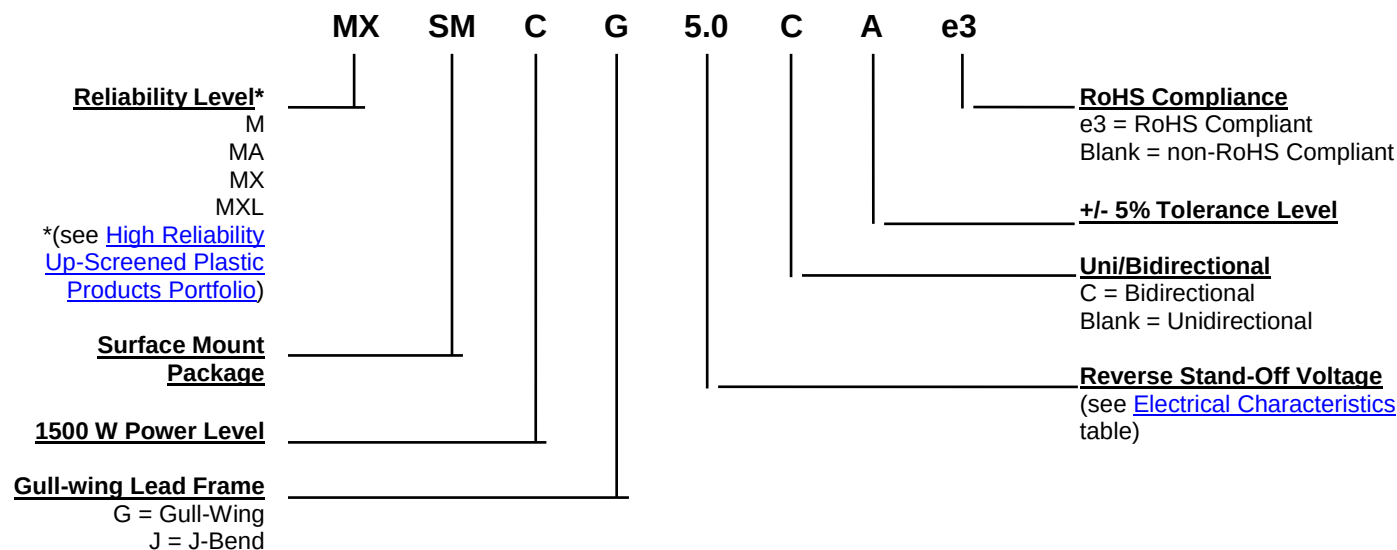
**MAXIMUM RATINGS**

| Parameters/Test Conditions                                                                          | Symbol              | Value               | Unit   |
|-----------------------------------------------------------------------------------------------------|---------------------|---------------------|--------|
| Junction and Storage Temperature                                                                    | $T_J$ and $T_{STG}$ | -65 to +150         | °C     |
| Thermal Resistance Junction-to-Lead                                                                 | $R_{\theta JL}$     | 20                  | °C/W   |
| Thermal Resistance Junction-to-Ambient <sup>(1)</sup>                                               | $R_{\theta JA}$     | 80                  | °C/W   |
| Peak Pulse Power Dissipation @ 25 °C (at 10/1000 $\mu$ s, see <a href="#">Figures 1, 2, and 3</a> ) | $P_{PP}$            | 1500                | W      |
| Impulse Repetition Rate (duty factor)                                                               | df                  | 0.01                | %      |
| $t_{clamping}$ (0 volts to $V_{(BR)}$ min.)                                                         | $t_{clamping}$      | <100                | ps     |
| Unidirectional                                                                                      |                     | <5                  | ns     |
| Bidirectional                                                                                       |                     |                     |        |
| Rated Average Power Dissipation                                                                     | $P_{M(AV)}$         | 6                   | W      |
| $T_L = +30$ °C                                                                                      |                     | 1.56 <sup>(1)</sup> |        |
| $T_A = +25$ °C                                                                                      |                     |                     |        |
| Maximum Forward Surge Current <sup>(2)</sup>                                                        | $I_{FSM}$           | 200                 | A (pk) |
| Solder Temperature @ 10 s                                                                           | $T_{SP}$            | 260                 | °C     |

**Notes:** 1. When mounted on FR4 PC board (1oz Cu) with recommended footprint (see [last page](#)).  
2. Peak impulse of 8.3 ms half-sine wave at 25 °C (unidirectional only).

**MECHANICAL and PACKAGING**

- CASE: Void-free transfer molded thermosetting epoxy body meeting UL94V-0.
- TERMINALS: Tin-lead or RoHS compliant annealed matte-tin plating. Solderable to MIL-STD-750, method 2026.
- MARKING: Part number marked on package.
- POLARITY: Cathode indicated by band. No cathode band on bi-directional devices.
- TAPE & REEL option: Standard per EIA-481-2 with 16 mm tape (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: Approximately 0.25 grams.
- See [Package Dimensions](#) on last page.

**PART NOMENCLATURE**


| SYMBOLS & DEFINITIONS |                                                                                                                                                          |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Symbol                | Definition                                                                                                                                               |
| $I_{(BR)}$            | Breakdown Current: The current used for measuring breakdown voltage $V_{(BR)}$ .                                                                         |
| $I_D$                 | Standby Current: The current at the rated standoff voltage ( $V_{WM}$ ).                                                                                 |
| $I_F$                 | Forward Current: The forward current dc value, no alternating component.                                                                                 |
| $I_O$                 | Average Rectified Output Current: The output current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180-degree conduction angle. |
| $I_{PP}$              | Peak Impulse Current: The peak current during the impulse.                                                                                               |
| $P_{PP}$              | Peak Pulse Power: The peak power dissipation resulting from the peak impulse current $I_{PP}$ .                                                          |
| $V_C$                 | Clamping Voltage: Maximum clamping voltage at specified $I_{PP}$ (Peak Pulse Current) at the specified pulse conditions.                                 |
| $V_{(BR)}$            | Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current.                                                           |
| $V_{WM}$              | Working Peak Voltage: The maximum peak voltage that can be applied over the operating temperature range. This is also referred to as standoff voltage.   |

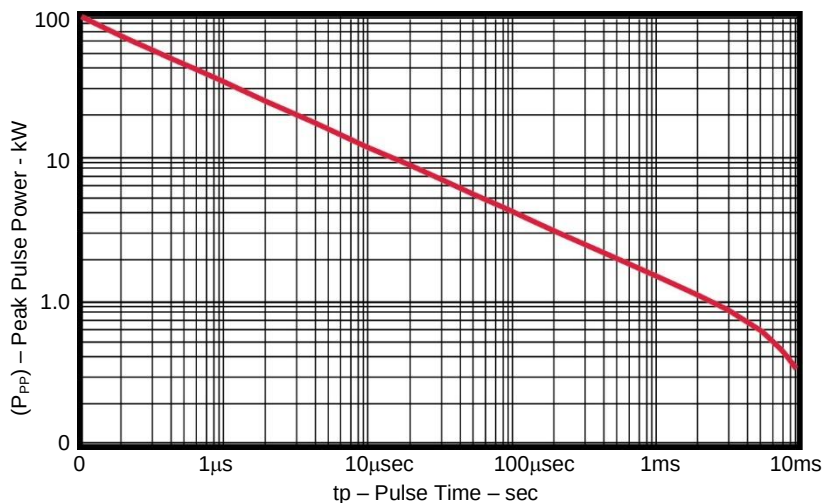
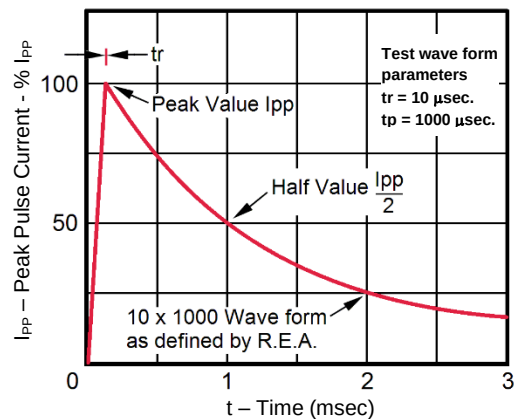
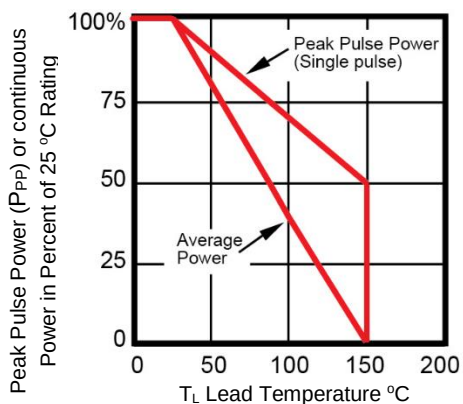
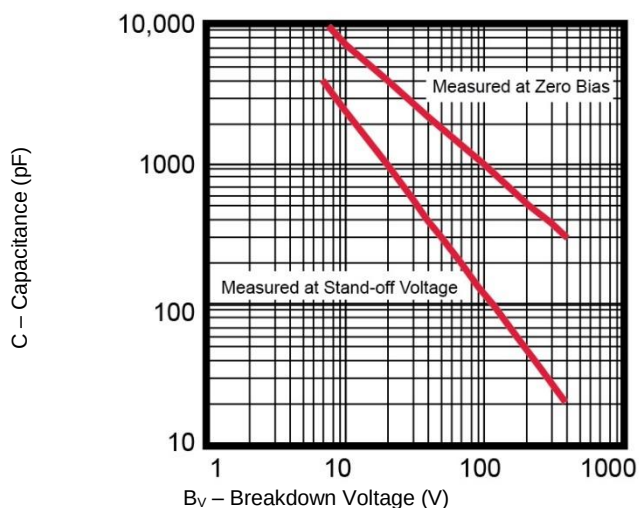
**ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise stated**

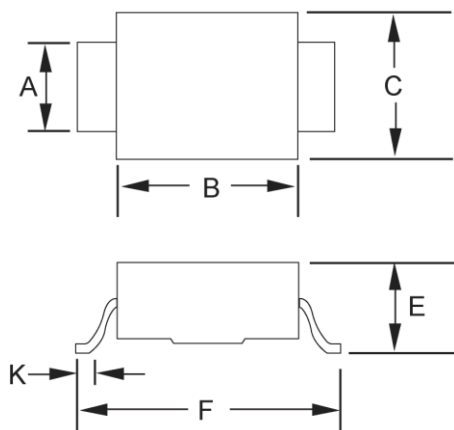
| MICROSEMI PART NUMBER |           | REVERSE<br>STAND-OFF<br>VOLTAGE<br>$V_{WM}$<br>Volts | BREAKDOWN<br>VOLTAGE<br>$V_{(BR)}$ @ $I_{(BR)}$<br>Volts |      | MAXIMUM<br>CLAMPING<br>VOLTAGE<br>@ $I_{PP}$<br>Volts | PEAK PULSE<br>CURRENT<br>(See Fig. 2)<br>$I_{PP}$<br>Amps | MAXIMUM<br>STANDBY<br>CURRENT<br>@ $V_{WM}$<br>$I_D$<br>$\mu A$ |
|-----------------------|-----------|------------------------------------------------------|----------------------------------------------------------|------|-------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------------|
| Gull-Wing             | J-Bend    |                                                      | MIN.                                                     | MAX. |                                                       |                                                           |                                                                 |
| MSMCG5.0A             | MSMCJ5.0A | 5.0                                                  | 6.40 – 7.00                                              | 10   | 9.2                                                   | 163.0                                                     | 1000                                                            |
| MSMCG6.0A             | MSMCJ6.0A | 6.0                                                  | 6.67 – 7.37                                              | 10   | 10.3                                                  | 145.6                                                     | 1000                                                            |
| MSMCG6.5A             | MSMCJ6.5A | 6.5                                                  | 7.22 – 7.98                                              | 10   | 11.2                                                  | 133.9                                                     | 500                                                             |
| MSMCG7.0A             | MSMCJ7.0A | 7.0                                                  | 7.78 – 8.60                                              | 10   | 12.0                                                  | 125.0                                                     | 200                                                             |
| MSMCG7.5A             | MSMCJ7.5A | 7.5                                                  | 8.33 – 9.21                                              | 1    | 12.9                                                  | 116.3                                                     | 100                                                             |
| MSMCG8.0A             | MSMCJ8.0A | 8.0                                                  | 8.89 – 9.83                                              | 1    | 13.6                                                  | 110.3                                                     | 50                                                              |
| MSMCG8.5A             | MSMCJ8.5A | 8.5                                                  | 9.44 – 10.4                                              | 1    | 14.4                                                  | 104.2                                                     | 20                                                              |
| MSMCG9.0A             | MSMCJ9.0A | 9.0                                                  | 10.0 – 11.1                                              | 1    | 15.4                                                  | 97.4                                                      | 10                                                              |
| MSMCG10A              | MSMCJ10A  | 10                                                   | 11.1 – 12.3                                              | 1    | 17.0                                                  | 88.2                                                      | 5                                                               |
| MSMCG11A              | MSMCJ11A  | 11                                                   | 12.2 – 13.5                                              | 1    | 18.2                                                  | 82.4                                                      | 5                                                               |
| MSMCG12A              | MSMCJ12A  | 12                                                   | 13.3 – 14.7                                              | 1    | 19.9                                                  | 75.3                                                      | 5                                                               |
| MSMCG13A              | MSMCJ13A  | 13                                                   | 14.4 – 15.9                                              | 1    | 21.5                                                  | 69.7                                                      | 1                                                               |
| MSMCG14A              | MSMCJ14A  | 14                                                   | 15.6 – 17.2                                              | 1    | 23.2                                                  | 64.7                                                      | 1                                                               |
| MSMCG15A              | MSMCJ15A  | 15                                                   | 16.7 – 18.5                                              | 1    | 24.4                                                  | 61.5                                                      | 1                                                               |
| MSMCG16A              | MSMCJ16A  | 16                                                   | 17.8 – 19.7                                              | 1    | 26.0                                                  | 57.7                                                      | 1                                                               |
| MSMCG17A              | MSMCJ17A  | 17                                                   | 18.9 – 20.9                                              | 1    | 27.6                                                  | 53.3                                                      | 1                                                               |
| MSMCG18A              | MSMCJ18A  | 18                                                   | 20.0 – 22.1                                              | 1    | 29.2                                                  | 51.4                                                      | 1                                                               |
| MSMCG20A              | MSMCJ20A  | 20                                                   | 22.2 – 24.5                                              | 1    | 32.4                                                  | 46.3                                                      | 1                                                               |
| MSMCG22A              | MSMCJ22A  | 22                                                   | 24.4 – 26.9                                              | 1    | 35.5                                                  | 42.2                                                      | 1                                                               |
| MSMCG24A              | MSMCJ24A  | 24                                                   | 26.7 – 29.5                                              | 1    | 38.9                                                  | 38.6                                                      | 1                                                               |
| MSMCG26A              | MSMCJ26A  | 26                                                   | 28.9 – 31.9                                              | 1    | 42.1                                                  | 35.6                                                      | 1                                                               |
| MSMCG28A              | MSMCJ28A  | 28                                                   | 31.1 – 34.4                                              | 1    | 45.4                                                  | 33.0                                                      | 1                                                               |
| MSMCG30A              | MSMCJ30A  | 30                                                   | 33.3 – 36.8                                              | 1    | 48.4                                                  | 31.0                                                      | 1                                                               |
| MSMCG33A              | MSMCJ33A  | 33                                                   | 36.7 – 40.6                                              | 1    | 53.3                                                  | 28.1                                                      | 1                                                               |
| MSMCG36A              | MSMCJ36A  | 36                                                   | 40.0 – 44.2                                              | 1    | 58.1                                                  | 25.8                                                      | 1                                                               |
| MSMCG40A              | MSMCJ40A  | 40                                                   | 44.4 – 49.1                                              | 1    | 64.5                                                  | 23.2                                                      | 1                                                               |
| MSMCG43A              | MSMCJ43A  | 43                                                   | 47.8 – 52.8                                              | 1    | 69.4                                                  | 21.6                                                      | 1                                                               |
| MSMCG45A              | MSMCJ45A  | 45                                                   | 50.0 – 55.3                                              | 1    | 72.7                                                  | 20.6                                                      | 1                                                               |
| MSMCG48A              | MSMCJ48A  | 48                                                   | 53.3 – 58.9                                              | 1    | 77.4                                                  | 19.4                                                      | 1                                                               |
| MSMCG51A              | MSMCJ51A  | 51                                                   | 56.7 – 62.7                                              | 1    | 82.4                                                  | 18.2                                                      | 1                                                               |
| MSMCG54A              | MSMCJ54A  | 54                                                   | 60.0 – 66.3                                              | 1    | 87.1                                                  | 17.2                                                      | 1                                                               |
| MSMCG58A              | MSMCJ58A  | 58                                                   | 64.4 – 71.2                                              | 1    | 93.6                                                  | 16.0                                                      | 1                                                               |
| MSMCG60A              | MSMCJ60A  | 60                                                   | 66.7 – 73.7                                              | 1    | 96.8                                                  | 15.5                                                      | 1                                                               |
| MSMCG64A              | MSMCJ64A  | 64                                                   | 71.1 – 78.6                                              | 1    | 103.0                                                 | 14.6                                                      | 1                                                               |
| MSMCG70A              | MSMCJ70A  | 70                                                   | 77.8 – 86.0                                              | 1    | 113                                                   | 13.3                                                      | 1                                                               |
| MSMCG75A              | MSMCJ75A  | 75                                                   | 83.3 – 92.1                                              | 1    | 121                                                   | 12.4                                                      | 1                                                               |

Continued.

**ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise stated (continued)**

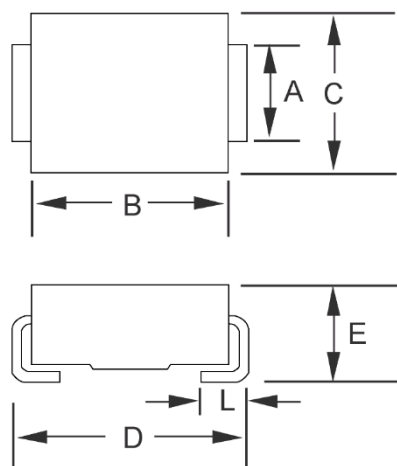
| MICROSEMI PART NUMBER |           | REVERSE<br>STAND-OFF<br>VOLTAGE<br>$V_{WM}$ | BREAKDOWN<br>VOLTAGE<br>$V_{(BR)}$ @ $I_{(BR)}$<br>Volts |      | MAXIMUM<br>CLAMPING<br>VOLTAGE<br>@ $I_{PP}$ | PEAK PULSE<br>CURRENT<br>(See <a href="#">Fig. 2</a> )<br>$I_{PP}$ | MAXIMUM<br>STANDBY<br>CURRENT<br>@ $V_{WM}$<br>$I_D$<br>$\mu A$ |
|-----------------------|-----------|---------------------------------------------|----------------------------------------------------------|------|----------------------------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------|
| Gull-Wing             | J-Bend    |                                             | MIN.                                                     | MAX. |                                              |                                                                    |                                                                 |
| MSMCG78A              | MSMCJ78A  | 78                                          | 86.7 – 95.8                                              | 1    | 126                                          | 11.4                                                               | 1                                                               |
| MSMCG85A              | MSMCJ85A  | 85                                          | 94.4 – 104.0                                             | 1    | 137                                          | 10.4                                                               | 1                                                               |
| MSMCG90A              | MSMCJ90A  | 90                                          | 100 – 111                                                | 1    | 146                                          | 10.3                                                               | 1                                                               |
| MSMCG100A             | MSMCJ100A | 100                                         | 111 – 123                                                | 1    | 162                                          | 9.3                                                                | 1                                                               |
| MSMCG110A             | MSMCJ110A | 110                                         | 122 – 135                                                | 1    | 177                                          | 8.4                                                                | 1                                                               |
| MSMCG120A             | MSMCJ120A | 120                                         | 133 – 147                                                | 1    | 193                                          | 7.8                                                                | 1                                                               |
| MSMCG130A             | MSMCJ130A | 130                                         | 144 – 159                                                | 1    | 209                                          | 7.2                                                                | 1                                                               |
| MSMCG150A             | MSMCJ150A | 150                                         | 167 – 185                                                | 1    | 243                                          | 6.2                                                                | 1                                                               |
| MSMCG160A             | MSMCJ160A | 160                                         | 178 – 197                                                | 1    | 259                                          | 5.8                                                                | 1                                                               |
| MSMCG170A             | MSMCJ170A | 170                                         | 189 – 209                                                | 1    | 275                                          | 5.5                                                                | 1                                                               |

**GRAPHS**

**FIGURE 1 – Peak Pulse Power vs. Pulse Time**

**FIGURE 2 – Pulse Waveform**

**FIGURE 3 – Derating Curve**

**FIGURE 4**  
**Typical Capacitance vs.**  
**Breakdown Voltage (unidirectional configuration)**  
 NOTE: Bidirectional capacitance is half that shown at zero volts.

**PACKAGE DIMENSIONS**

**SMCG (DO-215AB)**

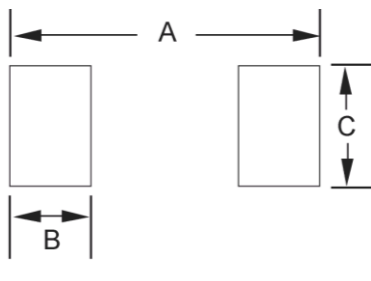
| Ltr | Dimensions |      |             |       |
|-----|------------|------|-------------|-------|
|     | Inch       |      | Millimeters |       |
|     | Min        | Max  | Min         | Max   |
| A   | .115       | .121 | 2.92        | 3.07  |
| B   | .260       | .280 | 6.60        | 7.11  |
| C   | .220       | .245 | 5.59        | 6.22  |
| E   | .077       | .110 | 1.95        | 2.80  |
| F   | .380       | .400 | 9.65        | 10.16 |
| K   | .025       | .040 | 0.635       | 1.016 |

**NOTES:** Dimension "E" exceeds the JEDEC outline as shown.  
Typical Standoff Height: 0.004" – 0.008" (0.1 mm – 0.2 mm).


**SMCJ (DO-214AB)**

| Ltr | Dimensions |      |             |      |
|-----|------------|------|-------------|------|
|     | Inch       |      | Millimeters |      |
|     | Min        | Max  | Min         | Max  |
| A   | .115       | .121 | 2.92        | 3.07 |
| B   | .260       | .280 | 6.60        | 7.11 |
| C   | .220       | .245 | 5.59        | 6.22 |
| D   | .305       | .320 | 7.75        | 8.13 |
| E   | .077       | .110 | 1.95        | 2.80 |
| L   | .030       | .060 | .760        | 1.52 |

**NOTES:** Dimension "E" exceeds the JEDEC outline in height as shown.  
Typical Standoff Height: 0.004" – 0.008" (0.1 mm – 0.2 mm).

**PAD LAYOUT**


| <b>SMCG (DO-215AB)</b> |             |                    |
|------------------------|-------------|--------------------|
| <b>Ltr</b>             | <b>Inch</b> | <b>Millimeters</b> |
| <b>A</b>               | .510        | 12.95              |
| <b>B</b>               | .110        | 2.79               |
| <b>C</b>               | .150        | 3.81               |

| <b>SMCJ (DO-214AB)</b> |             |                    |
|------------------------|-------------|--------------------|
| <b>Ltr</b>             | <b>Inch</b> | <b>Millimeters</b> |
| <b>A</b>               | .390        | 9.90               |
| <b>B</b>               | .110        | 2.79               |
| <b>C</b>               | .150        | 3.81               |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9