

SX-SDPAN

802.11a/b/g/n SiP for Mobile Applications



Highly Integrated Dual Band 802.11n plus Advanced Bluetooth 4.0 Solution

The Silex SX-SDPAN (Qualcomm Atheros AR6233) is a third-generation Wireless LAN solution, featuring dual-band 802.11n plus Bluetooth. Based on the game-changing AR6003 Wireless LAN chip, the SX-SDPAN brings 802.11n throughput, range and power efficiency to portable devices including patient monitors, printers, handheld terminals and more.

The SX-SDPAN integrates all WLAN and Bluetooth functionality in a single package to support a low-cost PCB layout implementation. 5 GHz WLAN is supported with an external Front End Module (FEM). Shared and dual antenna configurations can be implemented with a minimum number of external RF components.

Benefits:

- High RBOM integration enables design flexibility and lowest cost
- Smallest foot print for space constrained devices
- Ultra low power consumption for extended battery life
- Supports 40 MHz channels at 5 GHz allowing for highest throughput for bandwidth intensive applications

Solution Highlights:

The SX-SDPAN incorporates all the features and performance of the award winning Qualcomm Atheros ROCm® AR6003 solution, including:

- Single-stream 802.11n for faster downloads, longer range, and lower power consumption
- Bluetooth 3.0+HS and 4.0 Low Energy
- High level of RF integration enables direct antenna connection through separate 2.4 GHz WLAN and Bluetooth antenna ports
- Flexible dual-band solution with 5 GHz front end module (FEM); shared and dual antenna configurations supported
- Highest level of on-chip integration using CMOS technology
 - Radio/MAC/Baseband
 - Patented Qualcomm Atheros Efficient Power Amplifier (EPA™) for high transmitter output power
 - Integrated power management unit
- Qualcomm Atheros Universal Wireless Cooperation for enhanced Wi-Fi/Bluetooth Coexistence

Features:

- IEEE 802.11a/b/g/n 2.4/5 GHz
- Bluetooth 3.0+HS and 4.0 Low Energy
- Integrated CMOS Efficient Power Amplifier (EPA™), LNA
- Adaptive radio biasing for low-power or high-performance modes
- Industry-leading receive sensitivity
- No external EEPROM required for RF calibration
- Integrated RISC processor
- Support for industry standard QoS schemes (802.11e, WMM, WMM-PS)
- Hardware accelerated security, including WAPI (China)


Target Applications:

The SX-SDPAN is ideal for any high volume portable device where there is a requirement to achieve the lowest BOM cost or smallest foot print. Implementation of a System-in-Package solution is recommended for companies that have RF hardware expertise. Software driver and supplicant development is also generally required.


Specifications:

Product Name	SX-SDPAN-2830BT
Chipset	Qualcomm Atheros AR6233
Operating Voltage	VDD 3.3V, AVDD 1.8v
Dimensions	8.4 x 8.4 x 1.1 mm LGA package with 650um pitch pads
Bluetooth Specifications	BT3.0+HS, BT4.0, Class 1.5
Storage Temperature	-45 to +125 degrees C
Operating Temperature	-20 to +85 degrees C

Dimensions and Architecture

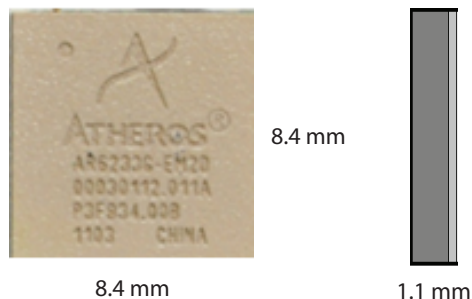

Physical Specifications 8.4 x 8.4 x 1.1 mm LGA Package

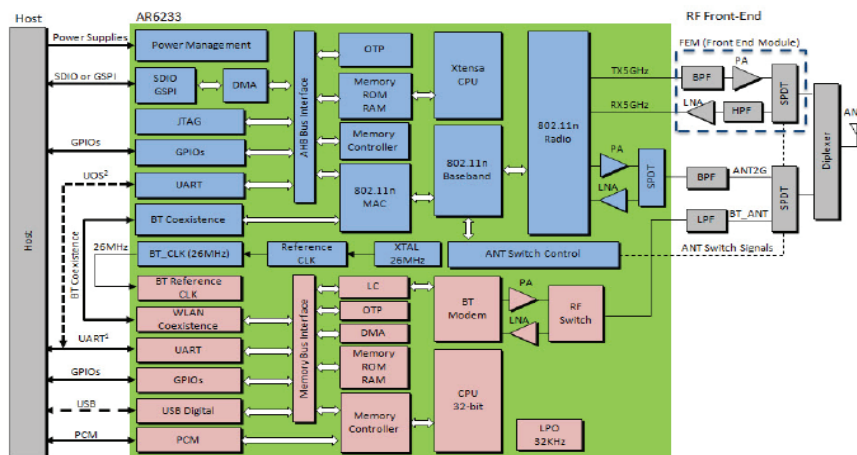

General Specifications

On-Chip Functionality: Single-chip MAC/BB/RF/PA/LNA
 Frequency Band: 2.4 GHz / 5 GHz
 Network Standard: 802.11a, 802.11b, 802.11g, 802.11n
 Modulation Modes: CCK and OFDM with BPSK, QPSK, 16 QAM, 64 QAM
 Hardware Encryption: WEP, WPA/WPA2, (AES and TKIP), WAPI
 Quality of Service (QoS): WMM, WMM-PS, 802.11e

Interfaces

Communications: SDIO 2.0, GSPI
 Physical Specifications: 8.4 mm x 8.4 mm LGA Package
 802.11n (PHY Layer) Throughput at different Modulations

Mode	MCS	Modulation	Data Rate (Mbps)			
			20MHz (2.4GHz and 5MHz)		40MHz (5GHz only)	
			FGI	HGI	FGI	HGI
IEEE 802.11n	0	BPSK	6.5	7.2	13.5	15.0
	1	QPSK	13.0	14.4	27.0	30.0
	2	QPSK	19.5	21.7	40.5	45.0
	3	16-QAM	26.0	29.9	54.0	60.0
	4	16-QAM	39.0	43.3	81.0	90.0
	5	64-QAM	52.0	57.8	108.0	120.0
	6	64-QAM	58.5	65.0	121.5	135.0
	7	64-QAM	65.0	72.2	135.0	150.0

Driver Support

Reference Drivers:

- Linux
- Android
- Windows Embedded Compact 7
- QNX Neutrino
- Green Hills Intergrity
- Mentor Graphics Nucleus

Ordering Information

SX-SDPAN-2830BT: Bulk Packaged, Tape / Reel
 SX-SDPAN-2830BT-SP: 10 Unit Sample Pack
 SX-6K3-EVK-DB: AR6003 Dual Band Evaluation Kit

silex technology is a registered trademark of silex technology, Inc. Other product or brand names may be registered trademarks or trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2012 silex technology, Inc. All rights reserved.

silex global sales & support locations

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9