


SPECIFICATION CONTROL DRAWING		82/1832	
TITLE	THREE CONDUCTOR CABLE, SHIELDED, JACKETED, OUTER SPACE, FLEXIBLE, 600 VOLT	Date	1-12-09
		Revision	A
This specification sheet forms a part of the latest issue of Raychem Specification 80.			

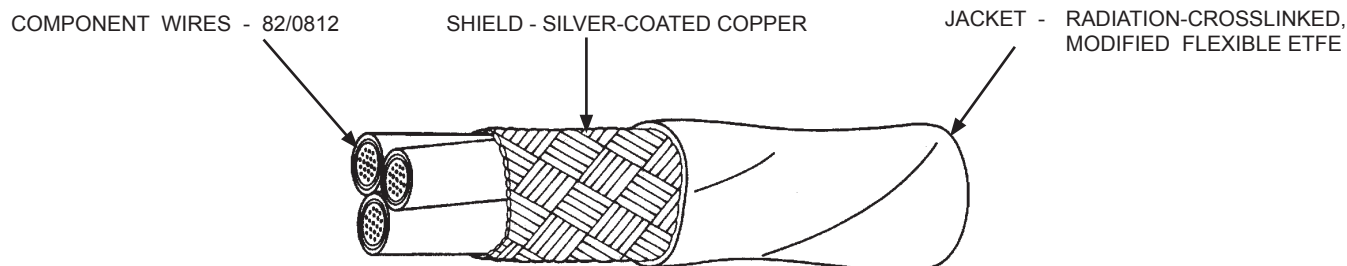

CABLE CONSTRUCTION DETAILS							
PART NUMBER <u>1/</u>	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
82/1832-26-*	26	38	.006	.009	.117	.123	12.3
82/1832-24-*	24	38	.006	.009	.130	.137	15.7
82/1832-22-*	22	38	.007	.010	.154	.161	21.4
82/1832-20-*	20	38	.008	.011	.177	.186	28.2
82/1832-18-*	18	38	.008	.012	.205	.215	39.4
82/1832-16-*	16	38	.010	.014	.244	.256	55.6
82/1832-14-*	14	38	.011	.016	.300	.315	84.6
82/1832-12-*	12	36	.013	.018	.353	.371	121.
82/1832-10-*	10	36	.015	.022	.469	.492	207.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 100% (minimum)

Tensile Strength, 3000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1500 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

RADIATION RESISTANCE (Test per Raychem Spec 55/):

500 megarads

SECANT MODULUS (Test per ASTM D 882):

4.0 x 10⁴ lbf/in² (maximum),

2% strain, 2 inch jaw separation, 0.2 inch/minute

SHIELD COVERAGE: 85% (minimum)

VACUUM STABILITY (Test per ASTM E 595):

Total Mass Loss (TML), 1.00% (maximum)

Volatile Condensable Material (VCM), 0.10% (maximum)

VOLTAGE WITHSTAND (Post Environmental):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Colors shown do not necessarily reflect the sequence of manufacturing.

NOTE: Nominal values are for information only.

Nominal values are not requirements.

1/ Example: AWG 22, black, brown and red component wires;
white jacket: 82/1832-22-0/1/2-9

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.			
1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.			
Page 1 of 1	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL		 Raychem Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297
	The TE logo, Tyco Electronics and Raychem are trademark.		
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9