




- Feature metal pawl for high strength and better durability.
- Self-locking head design speeds installation and locks into place at any length along the tie body.
- Provide a strong, durable method of cable bundling.
- Can be used in a wide range of indoor, outdoor, and underground (including direct burial) applications.
- Smooth surfaces and rounded edges assure cable protection and worker safety.
- Part Description Key: NTMP-XXX-YYY where XXX = tensile (foot pounds) and YYY = length (inches x 10).
- These parts are not covered under Heyco's solar warranty.

Heyco® Nytyes® with Stainless Steel Locking Device

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Min. Tensile Strength		Max. Bundle Diameter		Natural	Black		A Length		B Width		C Thickness	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.	in.	mm.
18	80	.87	22,0	13000	13000B	NTMP-018-039	3.90	100	.12	3,0	.04	1,1
35	160	1.42	36,0	13001	13001B	NTMP-036-059	5.90	150	.16	4,0	.05	1,2
		2.09	53,0	13002	13002B	NTMP-036-079	7.90	200				
45	200	2.56	65,0	13003	13003B	NTMP-045-098	9.80	250	.20	5,0	.06	1,5
		2.99	76,0	13004	13004B	NTMP-045-118	11.80	300				
56	250	2.09	53,0	13008	13008B	NTMP-056-079	7.90	200	.31	8,0		
		2.60	66,0	13009	13009B	NTMP-056-094	9.40	240				
		2.99	76,0	13010	13010B	NTMP-056-118	11.80	300				
112	500	2.99	76,0	13011	13011B	NTMP-112-118	11.80	300	.39	10,0	.07	1,7
		3.74	95,0	13012	13012B	NTMP-112-138	13.80	350				
		4.45	113,0	13013	13013B	NTMP-112-157	15.70	400				
124	550	4.72	120,0	13014	13014B	NTMP-124-177	17.70	450				
		6.22	158,0	13015	13015B	NTMP-124-197	19.70	500				

Standard colors natural and UV Black.

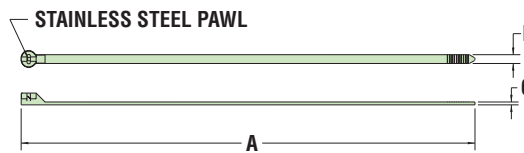

Material	Nylon 6/6 wire tie with a stainless steel locking pawl
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)



- **Extremely durable, vinyl jacketed Stainless Steel Cable Tie.**
- Smooth vinyl jacketing prevents damage to installation cable insulation.
- Stainless steel crimp sleeve for easy field installation with electrician linesman pliers, or wire cutters.
- **Certified by UL Specification 62275 for indoor and outdoor usage.**
- UV protected vinyl jacket is excellent for solar installation where product durability is required.
- Use standard wire cutters to both crimp the sleeve and cut the excess wire.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant.


Heyco® SunBundler®

Crimp Lock PVC Coated Stainless Steel Wire Cable Ties



PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Max. Tensile Strength		Max. Bundle Diameter		100 Pack	Bulk		A Length		B Diameter	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.
Black vinyl jacketed 302/304 stainless steel wire										
100	440	2.30	58,4	S6408	S6409	SunBundler® 8	8	203	.06	1,6
		2.92	74,2	S6410	S6411	SunBundler® 10	10	254		
		3.88	98,6	S6412	S6413	SunBundler® 12	12	305		
		4.20	106,7	S6414	S6415	SunBundler® 14	14	356		
		6.36	161,5	S6420	S6421	SunBundler® 20	20	508		

Standard color Black.

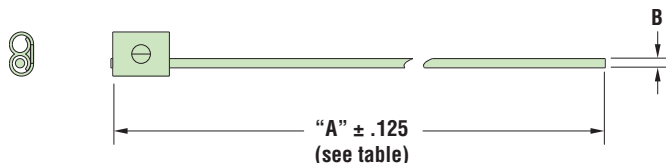

Material	Commercial Aircraft Grade 302/304 stainless wire w/UV protected vinyl jacket
Certifications	Certified by Underwriters' Laboratories for Compliance to both Canadian and U.S. Requirements under File E54523
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9