

# MC10E451, MC100E451

## 5V ECL 6-Bit D Register Differential Data and Clock

### Description

The MC10E/100E451 contains six D-type flip-flops with single-ended outputs and differential data inputs. The common clock input is also differential. The registers are triggered by a positive transition of the positive clock (CLK) input.

A HIGH on the Master Reset (MR) input resets all Q outputs to LOW.

The differential input structures are clamped so that the inputs of unused registers can be left open without upsetting the bias network of the device. The clamping action will assert the  $\overline{D}$  and the  $\overline{CLK}$  sides of the inputs. Because of the edge triggered flip-flop nature of the device simultaneously opening both the clock and data inputs will result in an output which reaches an unidentified but valid state. Note that the input clamps only operate when both inputs fall to 2.5 V below  $V_{CC}$ .

The  $V_{BB}$  pin, an internally generated voltage supply, is available to this device only. For single-ended input conditions, the unused differential input is connected to  $V_{BB}$  as a switching reference voltage.  $V_{BB}$  may also rebias AC coupled inputs. When used, decouple  $V_{BB}$  and  $V_{CC}$  via a 0.01  $\mu$ F capacitor and limit current sourcing or sinking to 0.5 mA. When not used,  $V_{BB}$  should be left open.

The 100 Series contains temperature compensation.


### Features

- Differential Inputs: Data and Clock
- $V_{BB}$  Output
- 1100 MHz Min. Toggle Frequency
- Asynchronous Master Reset
- PECL Mode Operating Range:  
 $V_{CC} = 4.2$  V to 5.7 V with  $V_{EE} = 0$  V
- NECL Mode Operating Range:  
 $V_{CC} = 0$  V with  $V_{EE} = -4.2$  V to  $-5.7$  V
- Internal Input 50 k $\Omega$  Pulldown Resistors
- ESD Protection: Human Body Model; > 2 kV,  
Machine Model; > 200 V
- Transistor Count = 348 devices
- Meets or Exceeds JEDEC Spec EIA/JESD78 IC Latchup Test
- Flammability Rating: UL 94 V-0 @ 0.125 in,  
Oxygen Index: 28 to 34




**ON Semiconductor®**

<http://onsemi.com>



PLCC-28  
FN SUFFIX  
CASE 776

### MARKING DIAGRAM\*



|     |                     |
|-----|---------------------|
| xxx | = 10 or 100         |
| A   | = Assembly Location |
| WL  | = Wafer Lot         |
| YY  | = Year              |
| WW  | = Work Week         |
| G   | = Pb-Free Package   |

\*For additional marking information, refer to Application Note AND8002/D.

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

- Moisture Sensitivity Level:

Pb = 1;


Pb-Free = 3

For Additional Information, see Application Note AND8003/D

- Pb-Free Packages are Available\*

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## MC10E451, MC100E451

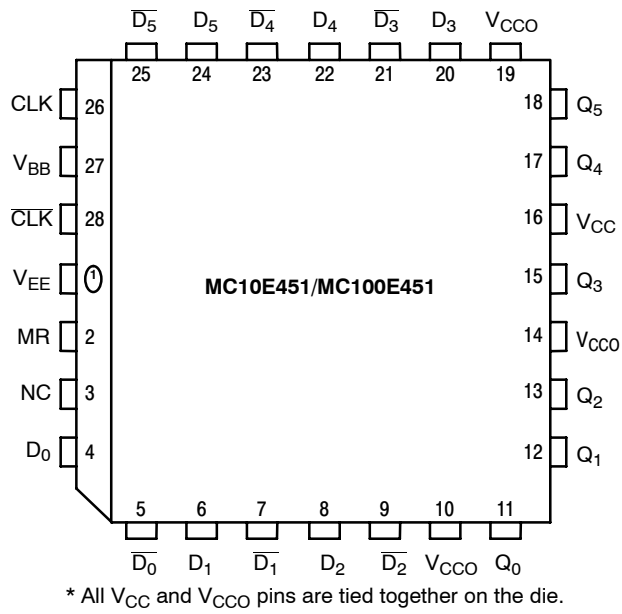

Warning: All V<sub>CC</sub>, V<sub>CCO</sub>, and V<sub>EE</sub> pins must be externally connected to Power Supply to guarantee proper operation.

Figure 1. 28-Lean Pinout Assignment (Top View)

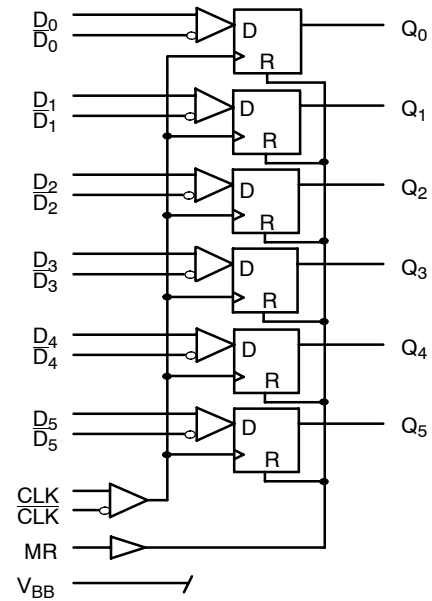


Figure 2. Logic Diagram

Table 1. PIN DESCRIPTION

| PIN                                                                   | FUNCTION                     |
|-----------------------------------------------------------------------|------------------------------|
| D <sub>0</sub> – D <sub>5</sub> , $\overline{D}_0$ – $\overline{D}_5$ | ECL Differential Data Input  |
| CLK, $\overline{CLK}$                                                 | ECL Differential Clock Input |
| MR                                                                    | ECL Master Reset Input       |
| Q <sub>0</sub> – Q <sub>5</sub>                                       | ECL Data Outputs             |
| V <sub>BB</sub>                                                       | Reference Voltage Output     |
| V <sub>CC</sub> , V <sub>CCO</sub>                                    | Positive Supply              |
| V <sub>EE</sub>                                                       | Negative Supply              |
| NC                                                                    | No Connect                   |

# MC10E451, MC100E451

**Table 2. MAXIMUM RATINGS**

| Symbol        | Parameter                                          | Condition 1                                    | Condition 2                            | Rating       | Unit         |
|---------------|----------------------------------------------------|------------------------------------------------|----------------------------------------|--------------|--------------|
| $V_{CC}$      | PECL Mode Power Supply                             | $V_{EE} = 0\text{ V}$                          |                                        | 8            | V            |
| $V_{EE}$      | NECL Mode Power Supply                             | $V_{CC} = 0\text{ V}$                          |                                        | -8           | V            |
| $V_I$         | PECL Mode Input Voltage<br>NECL Mode Input Voltage | $V_{EE} = 0\text{ V}$<br>$V_{CC} = 0\text{ V}$ | $V_I \leq V_{CC}$<br>$V_I \geq V_{EE}$ | 6<br>-6      | V<br>V       |
| $I_{out}$     | Output Current                                     | Continuous<br>Surge                            |                                        | 50<br>100    | mA<br>mA     |
| $I_{BB}$      | $V_{BB}$ Sink/Source                               |                                                |                                        | $\pm 0.5$    | mA           |
| $T_A$         | Operating Temperature Range                        |                                                |                                        | 0 to +85     | °C           |
| $T_{stg}$     | Storage Temperature Range                          |                                                |                                        | -65 to +150  | °C           |
| $\theta_{JA}$ | Thermal Resistance (Junction-to-Ambient)           | 0 lfpm<br>500 lfpm                             | PLCC-28<br>PLCC-28                     | 63.5<br>43.5 | °C/W<br>°C/W |
| $\theta_{JC}$ | Thermal Resistance (Junction-to-Case)              | Standard Board                                 | PLCC-28                                | 22 to 26     | °C/W         |
| $T_{sol}$     | Wave Solder<br>Pb<br>Pb-Free                       |                                                |                                        | 265<br>265   | °C           |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

# MC10E451, MC100E451

**Table 3. 10E SERIES PECL DC CHARACTERISTICS**  $V_{CCx} = 5.0 \text{ V}$ ;  $V_{EE} = 0.0 \text{ V}$  (Note 1)

| Symbol      | Characteristic                                                             | 0°C  |      |      | 25°C |      |      | 85°C |      |      | Unit          |
|-------------|----------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|---------------|
|             |                                                                            | Min  | Typ  | Max  | Min  | Typ  | Max  | Min  | Typ  | Max  |               |
| $I_{EE}$    | Power Supply Current                                                       |      | 84   | 101  |      | 84   | 101  |      | 84   | 101  | mA            |
| $V_{OH}$    | Output HIGH Voltage (Note 2)                                               | 3980 | 4070 | 4160 | 4020 | 4105 | 4190 | 4090 | 4185 | 4280 | mV            |
| $V_{OL}$    | Output LOW Voltage (Note 2)                                                | 3050 | 3210 | 3370 | 3050 | 3210 | 3370 | 3050 | 3227 | 3405 | mV            |
| $V_{IH}$    | Input HIGH Voltage (Single-Ended)                                          | 3830 | 3995 | 4160 | 3870 | 4030 | 4190 | 3940 | 4110 | 4280 | mV            |
| $V_{IL}$    | Input LOW Voltage (Single-Ended)                                           | 3050 | 3285 | 3520 | 3050 | 3285 | 3520 | 3050 | 3302 | 3555 | mV            |
| $V_{BB}$    | Output Voltage Reference                                                   | 3.62 |      | 3.74 | 3.65 |      | 3.75 | 3.69 |      | 3.81 | V             |
| $V_{IHCMR}$ | Input HIGH Voltage Common Mode Range (Differential Configuration) (Note 3) | 2.2  |      | 4.6  | 2.2  |      | 4.6  | 2.2  |      | 4.6  | V             |
| $I_{IH}$    | Input HIGH Current                                                         |      |      | 150  |      |      | 150  |      |      | 150  | $\mu\text{A}$ |
| $I_{IL}$    | Input LOW Current                                                          | 0.5  | 0.3  |      | 0.5  | 0.25 |      | 0.3  | 0.2  |      | $\mu\text{A}$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

1. Input and output parameters vary 1:1 with  $V_{CC}$ .  $V_{EE}$  can vary  $-0.46 \text{ V} / +0.06 \text{ V}$ .
2. Outputs are terminated through a  $50 \Omega$  resistor to  $V_{CC} - 2.0 \text{ V}$ .
3.  $V_{IHCMR}$  min varies 1:1 with  $V_{EE}$ , max varies 1:1 with  $V_{CC}$ .

**Table 4. 10E SERIES NECL DC CHARACTERISTICS**  $V_{CCx} = 0.0 \text{ V}$ ;  $V_{EE} = -5.0 \text{ V}$  (Note 4)

| Symbol      | Characteristic                                                             | 0°C   |       |       | 25°C  |       |       | 85°C  |       |       | Unit          |
|-------------|----------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------|
|             |                                                                            | Min   | Typ   | Max   | Min   | Typ   | Max   | Min   | Typ   | Max   |               |
| $I_{EE}$    | Power Supply Current                                                       |       | 84    | 101   |       | 84    | 101   |       | 84    | 101   | mA            |
| $V_{OH}$    | Output HIGH Voltage (Note 5)                                               | -1020 | -930  | -840  | -980  | -895  | -810  | -910  | -815  | -720  | mV            |
| $V_{OL}$    | Output LOW Voltage (Note 5)                                                | -1950 | -1790 | -1630 | -1950 | -1790 | -1630 | -1950 | -1773 | -1595 | mV            |
| $V_{IH}$    | Input HIGH Voltage (Single-Ended)                                          | -1170 | -1005 | -840  | -1130 | -970  | -810  | -1060 | -890  | -720  | mV            |
| $V_{IL}$    | Input LOW Voltage (Single-Ended)                                           | -1950 | -1715 | -1480 | -1950 | -1715 | -1480 | -1950 | -1698 | -1445 | mV            |
| $V_{BB}$    | Output Voltage Reference                                                   | -1.38 |       | -1.27 | -1.35 |       | -1.25 | -1.31 |       | -1.19 | V             |
| $V_{IHCMR}$ | Input HIGH Voltage Common Mode Range (Differential Configuration) (Note 6) | -2.8  |       | -0.4  | -2.8  |       | -0.4  | -2.8  |       | -0.4  | V             |
| $I_{IH}$    | Input HIGH Current                                                         |       |       | 150   |       |       | 150   |       |       | 150   | $\mu\text{A}$ |
| $I_{IL}$    | Input LOW Current                                                          | 0.5   | 0.3   |       | 0.5   | 0.065 |       | 0.3   | 0.2   |       | $\mu\text{A}$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

4. Input and output parameters vary 1:1 with  $V_{CC}$ .  $V_{EE}$  can vary  $-0.46 \text{ V} / +0.06 \text{ V}$ .
5. Outputs are terminated through a  $50 \Omega$  resistor to  $V_{CC} - 2.0 \text{ V}$ .
6.  $V_{IHCMR}$  min varies 1:1 with  $V_{EE}$ , max varies 1:1 with  $V_{CC}$ .

# MC10E451, MC100E451

**Table 5. 100E SERIES PECL DC CHARACTERISTICS**  $V_{CCx} = 5.0 \text{ V}$ ;  $V_{EE} = 0.0 \text{ V}$  (Note 7)

| Symbol      | Characteristic                                                             | 0°C  |      |      | 25°C |      |      | 85°C |      |      | Unit          |
|-------------|----------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|---------------|
|             |                                                                            | Min  | Typ  | Max  | Min  | Typ  | Max  | Min  | Typ  | Max  |               |
| $I_{EE}$    | Power Supply Current                                                       |      | 84   | 101  |      | 84   | 101  |      | 97   | 116  | mA            |
| $V_{OH}$    | Output HIGH Voltage (Note 8)                                               | 3975 | 4050 | 4120 | 3975 | 4050 | 4120 | 3975 | 4050 | 4120 | mV            |
| $V_{OL}$    | Output LOW Voltage (Note 8)                                                | 3190 | 3295 | 3380 | 3190 | 3255 | 3380 | 3190 | 3260 | 3380 | mV            |
| $V_{IH}$    | Input HIGH Voltage (Single-Ended)                                          | 3835 | 3975 | 4120 | 3835 | 3975 | 4120 | 3835 | 3975 | 4120 | mV            |
| $V_{IL}$    | Input LOW Voltage (Single-Ended)                                           | 3190 | 3355 | 3525 | 3190 | 3355 | 3525 | 3190 | 3355 | 3525 | mV            |
| $V_{BB}$    | Output Voltage Reference                                                   | 3.62 |      | 3.74 | 3.62 |      | 3.74 | 3.62 |      | 3.74 | V             |
| $V_{IHCMR}$ | Input HIGH Voltage Common Mode Range (Differential Configuration) (Note 9) | 2.2  |      | 4.6  | 2.2  |      | 4.6  | 2.2  |      | 4.6  | V             |
| $I_{IH}$    | Input HIGH Current                                                         |      |      | 150  |      |      | 150  |      |      | 150  | $\mu\text{A}$ |
| $I_{IL}$    | Input LOW Current                                                          | 0.5  | 0.3  |      | 0.5  | 0.25 |      | 0.5  | 0.2  |      | $\mu\text{A}$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

7. Input and output parameters vary 1:1 with  $V_{CC}$ .  $V_{EE}$  can vary  $-0.46 \text{ V} / +0.8 \text{ V}$ .

8. Outputs are terminated through a  $50 \Omega$  resistor to  $V_{CC} - 2.0 \text{ V}$ .

9.  $V_{IHCMR}$  min varies 1:1 with  $V_{EE}$ , max varies 1:1 with  $V_{CC}$ .

**Table 6. 100E SERIES NECL DC CHARACTERISTICS**  $V_{CCx} = 0.0 \text{ V}$ ;  $V_{EE} = -5.0 \text{ V}$  (Note 10)

| Symbol      | Characteristic                                                              | 0°C   |       |       | 25°C  |       |       | 85°C  |       |       | Unit          |
|-------------|-----------------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------------|
|             |                                                                             | Min   | Typ   | Max   | Min   | Typ   | Max   | Min   | Typ   | Max   |               |
| $I_{EE}$    | Power Supply Current                                                        |       | 84    | 101   |       | 84    | 101   |       | 97    | 116   | mA            |
| $V_{OH}$    | Output HIGH Voltage (Note 11)                                               | -1025 | -950  | -880  | -1025 | -950  | -880  | -1025 | -950  | -880  | mV            |
| $V_{OL}$    | Output LOW Voltage (Note 11)                                                | -1810 | -1705 | -1620 | -1810 | -1745 | -1620 | -1810 | -1740 | -1620 | mV            |
| $V_{IH}$    | Input HIGH Voltage (Single-Ended)                                           | -1165 | -1025 | -880  | -1165 | -1025 | -880  | -1165 | -1025 | -880  | mV            |
| $V_{IL}$    | Input LOW Voltage (Single-Ended)                                            | -1810 | -1645 | -1475 | -1810 | -1645 | -1475 | -1810 | -1645 | -1475 | mV            |
| $V_{BB}$    | Output Voltage Reference                                                    | -1.38 |       | -1.26 | -1.38 |       | -1.26 | -1.38 |       | -1.26 | V             |
| $V_{IHCMR}$ | Input HIGH Voltage Common Mode Range (Differential Configuration) (Note 12) | -2.8  |       | -0.4  | -2.8  |       | -0.4  | -2.8  |       | -0.4  | V             |
| $I_{IH}$    | Input HIGH Current                                                          |       |       | 150   |       |       | 150   |       |       | 150   | $\mu\text{A}$ |
| $I_{IL}$    | Input LOW Current                                                           | 0.5   | 0.3   |       | 0.5   | 0.25  |       | 0.5   | 0.2   |       | $\mu\text{A}$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

10. Input and output parameters vary 1:1 with  $V_{CC}$ .  $V_{EE}$  can vary  $+0.46 \text{ V} / -0.8 \text{ V}$ .

11. Outputs are terminated through a  $50 \Omega$  resistor to  $V_{CC} - 2.0 \text{ V}$ .

12.  $V_{IHCMR}$  min varies 1:1 with  $V_{EE}$ , max varies 1:1 with  $V_{CC}$ .

# MC10E451, MC100E451

**Table 7. AC CHARACTERISTICS**  $V_{CCx} = 5.0\text{ V}$ ;  $V_{EE} = 0.0\text{ V}$  or  $V_{CCx} = 0.0\text{ V}$ ;  $V_{EE} = -5.0\text{ V}$  (Note 13)

| Symbol                 | Characteristic                                                            | 0°C |      |      | 25°C |      |      | 85°C |      |      | Unit |
|------------------------|---------------------------------------------------------------------------|-----|------|------|------|------|------|------|------|------|------|
|                        |                                                                           | Min | Typ  | Max  | Min  | Typ  | Max  | Min  | Typ  | Max  |      |
| $f_{MAX}$              | Maximum Toggle Frequency                                                  | 1.1 |      |      | 1.1  |      |      | 1.1  |      |      | GHz  |
| $t_{PLH}$<br>$t_{PHL}$ | Propagation Delay to Output<br>CLK (Differential), CLK (Single-Ended), MR | 625 |      | 1050 | 625  |      | 1050 | 625  |      | 1050 | ps   |
| $t_s$                  | Setup Time D                                                              | 150 | -100 |      | 150  | -100 |      | 150  | -100 |      | ps   |
| $t_h$                  | Hold Time D                                                               | 250 | 100  |      | 250  | 100  |      | 250  | 100  |      | ps   |
| $t_{RR}$               | Reset Recovery Time                                                       | 750 | 600  |      | 750  | 600  |      | 750  | 600  |      | ps   |
| $t_{PW}$               | Minimum Pulse Width<br>CLK, MR                                            | 400 |      |      | 400  |      |      | 400  |      |      | ps   |
| $t_{SKEW}$             | Within-Device Skew (Note 14)                                              |     | 100  |      |      | 100  |      |      | 100  |      | ps   |
| $t_{JITTER}$           | Random Clock Jitter (RMS)                                                 |     | <1.0 |      |      | <1.0 |      |      | <1.0 |      | ps   |
| $V_{PP}$               | Input Voltage Swing (Differential Configuration)                          | 150 |      | 1000 | 150  |      | 1000 | 150  |      | 1000 | mV   |
| $t_r$<br>$t_f$         | Rise/Fall Times<br>(20 – 80%)                                             | 275 | 450  | 800  | 275  | 450  | 800  | 275  | 450  | 800  | ps   |


NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lfpm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

13.10 Series:  $V_{EE}$  can vary  $-0.46\text{ V} / +0.06\text{ V}$ .

100 Series:  $V_{EE}$  can vary  $-0.46\text{ V} / +0.8\text{ V}$ .

14. Within-device skew is defined as identical transitions on similar paths through a device.

## MC10E451, MC100E451

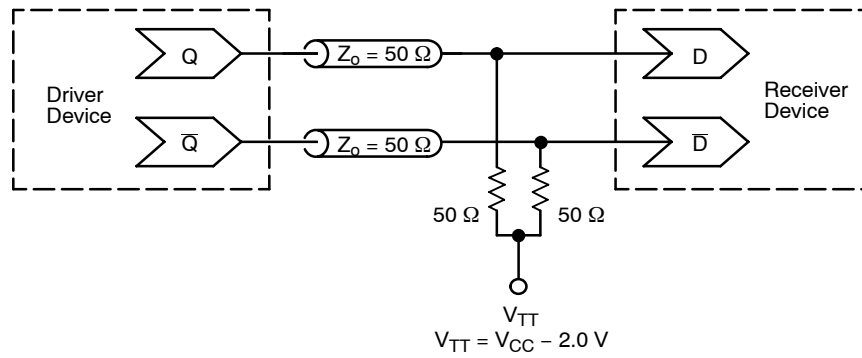

**Figure 3. Typical Termination for Output Driver and Device Evaluation**  
(See Application Note AND8020/D – Termination of ECL Logic Devices.)

### ORDERING INFORMATION

| Device         | Package              | Shipping <sup>†</sup> |
|----------------|----------------------|-----------------------|
| MC10E451FN     | PLCC-28              | 37 Units / Rail       |
| MC10E451FNG    | PLCC-28<br>(Pb-Free) | 37 Units / Rail       |
| MC10E451FNR2   | PLCC-28              | 500 / Tape & Reel     |
| MC10E451FNR2G  | PLCC-28<br>(Pb-Free) | 500 / Tape & Reel     |
| MC100E451FN    | PLCC-28              | 37 Units / Rail       |
| MC100E451FNG   | PLCC-28<br>(Pb-Free) | 37 Units / Rail       |
| MC100E451FNR2  | PLCC-28              | 500 / Tape & Reel     |
| MC100E451FNR2G | PLCC-28<br>(Pb-Free) | 500 / Tape & Reel     |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


### Resource Reference of Application Notes

- AN1405/D** – ECL Clock Distribution Techniques
- AN1406/D** – Designing with PECL (ECL at +5.0 V)
- AN1503/D** – ECLinPS™ I/O SPICE Modeling Kit
- AN1504/D** – Metastability and the ECLinPS Family
- AN1568/D** – Interfacing Between LVDS and ECL
- AN1672/D** – The ECL Translator Guide
- AND8001/D** – Odd Number Counters Design
- AND8002/D** – Marking and Date Codes
- AND8020/D** – Termination of ECL Logic Devices
- AND8066/D** – Interfacing with ECLinPS
- AND8090/D** – AC Characteristics of ECL Devices

# MC10E451, MC100E451

## PACKAGE DIMENSIONS

PLCC-28  
FN SUFFIX  
PLASTIC PLCC PACKAGE  
CASE 776-02  
ISSUE E

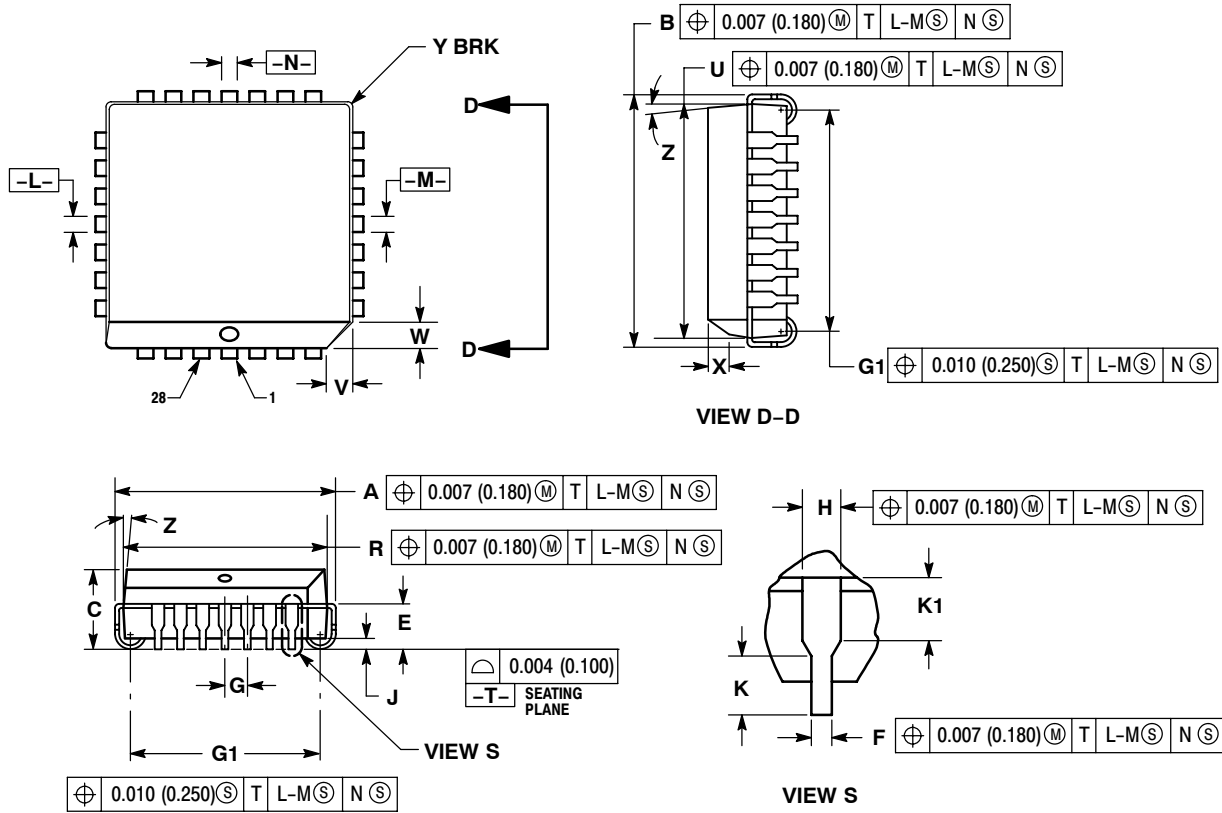

### NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.485     | 0.495 | 12.32       | 12.57 |
| B   | 0.485     | 0.495 | 12.32       | 12.57 |
| C   | 0.165     | 0.180 | 4.20        | 4.57  |
| E   | 0.090     | 0.110 | 2.29        | 2.79  |
| F   | 0.013     | 0.019 | 0.33        | 0.48  |
| G   | 0.050 BSC |       | 1.27 BSC    |       |
| H   | 0.026     | 0.032 | 0.66        | 0.81  |
| J   | 0.020     | ---   | 0.51        | ---   |
| K   | 0.025     | ---   | 0.64        | ---   |
| R   | 0.450     | 0.456 | 11.43       | 11.58 |
| U   | 0.450     | 0.456 | 11.43       | 11.58 |
| V   | 0.042     | 0.048 | 1.07        | 1.21  |
| W   | 0.042     | 0.048 | 1.07        | 1.21  |
| X   | 0.042     | 0.056 | 1.07        | 1.42  |
| Y   | ---       | 0.020 | ---         | 0.50  |
| Z   | 2°        | 10°   | 2°          | 10°   |
| G1  | 0.410     | 0.430 | 10.42       | 10.92 |
| K1  | 0.040     | ---   | 1.02        | ---   |



# MC10E451, MC100E451

ECLinPS is a trademark of Semiconductor Components Industries, LLC (SCILLC).

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9