




clipKIT™

THE BEST HEAT SINK ATTACHMENT TECHNOLOGY ON THE MARKET

- Patented superGRIP™ and maxiGRIP™ technology available for straight fin, slant fin, cross cut and pin fin heat sinks
- To be used with heat sinks that have a 1.75 to 4mm base thickness
- Plastic frame and stainless steel spring clips available for 15mm to 45mm components
- Secure heat sink attachment system passes Telcordia Shock & Vibration standards
- Attachment force improves TIM performance by up to 20%
- Eliminates the need to drill holes in a PCB & allows the heat sink to be detached and reattached without damaging the component

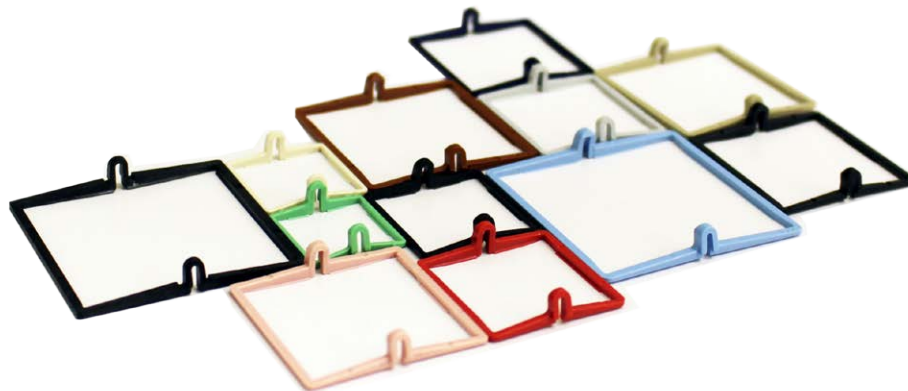


Advanced Thermal Solutions, Inc., has introduced clipKIT™ the ultimate heat sink attachment system that can be used with straight fin, pin fin, cross cut or slant fin heat sinks. clipKIT™ is a line of patented, reliable heat sink attachment assemblies featuring the widely used maxiGRIP™ and superGRIP™ frame clip and spring clip. clipKIT™ is available for 15 – 45mm component packages and is designed for standard heat sinks that have a base thickness of 1.75 to 4mm.

Instead of relying on thermal tape or epoxy, which can damage the board or component during rework, the reliable clip attachment system provides a secure hold without the risk of damaging the component or PCB, saving time and cost. The ultra-thin plastic frame clip and stainless steel spring clip are corrosion-resistant, flame retardant and pass Telcordia shock and vibration standards, ensuring the heat sink will securely stay in place on the component in harsh conditions. clipKIT™ attachments eliminate the need to drill holes in a PCB, saving additional board and rework costs. The thin frame clip occupies minimal space around the components perimeter, compared to push pin attachments or stand-off hardware which leaves little space on already overcrowded PCBs. The two-part attachment system provides a uniform force which enhancing heat transfer and improves TIM performance by up to 20%.




maxiGRIP™ Spring (above) & Frame Clips (below)

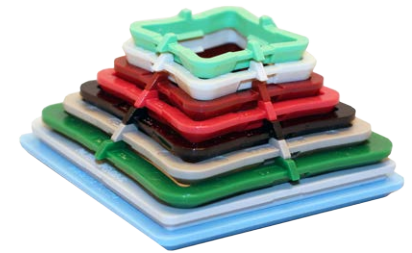

COMPONENT SIZES

- 15 mm x 15 mm
- 17 mm x 17 mm
- 19 mm x 19 mm
- 21 mm x 21 mm
- 23 mm x 23 mm
- 25 mm x 25 mm
- 27 mm x 27 mm
- 29 mm x 29 mm
- 30 mm x 30 mm
- 31 mm x 31 mm
- 32.5 mm x 32.5 mm
- 33 mm x 33 mm
- 35 mm x 35 mm
- 37.5 mm x 37.5 mm
- 40 mm x 40 mm
- 42.5 mm x 42.5 mm
- 45 mm x 45 mm


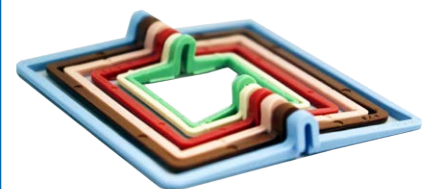


superGRIP™ Frame (above) & Spring Clips (below)





maxiGRIP™ ASSEMBLY

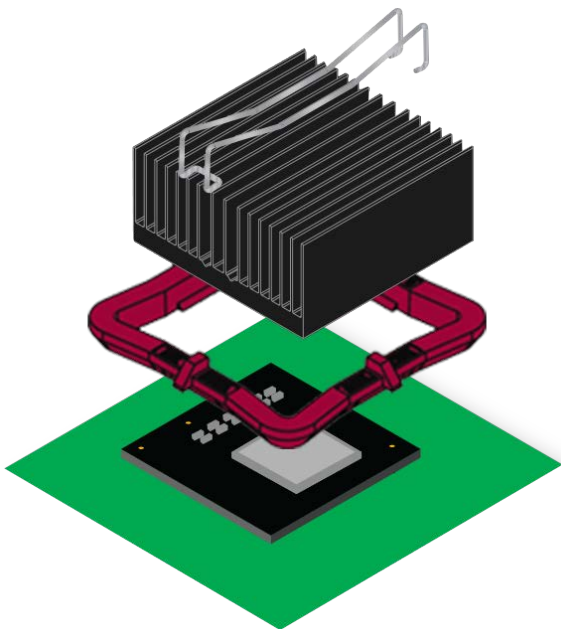

FRAME CLIP



- High-strength, high-performance plastic meets stringent UL-94V-0 fire rating which has exceptional thermal stability
- Frame geometry has been optimized for strength and minimal space requirements
- Tapered wall provides clearance for adjacent components
- Hour glass shape provides additional room for metal spring clip
- Uniformity in design allows for omnidirectional frame clip orientation



SPRING CLIP

- Metal spring clip, placed through the heat sink's fin field, locks securely to both ends to the plastic frame
- Double "M" shape provides steady, even pressure to the component, improving thermal performance and long-term reliability
- Spring clip is quickly installed with the maxiGRIP™ Installation Tool
- Specifically designed for different component heights.
- Imposes minimal restriction to air flow
- Accommodates varied fin-to-fin spacing

superGRIP™ ASSEMBLY

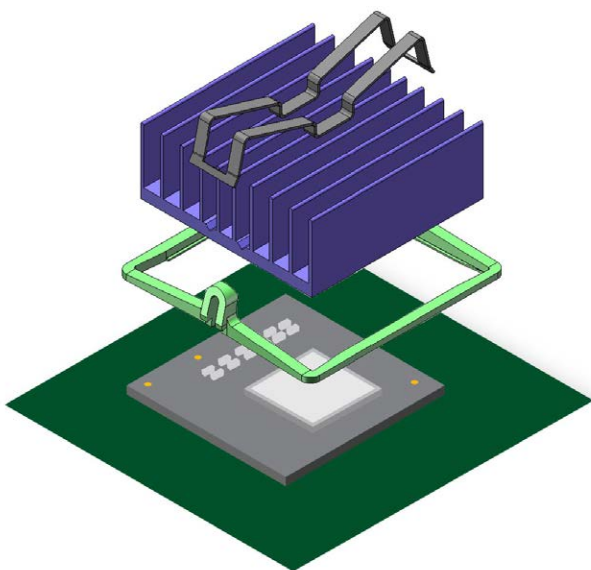

FRAME CLIP

- Thin, yet strong plastic Frame Clip occupies minimal area around chip, allowing its use in densely populated PCBs
- No custom installation tooling required— mounts easily by hand.
- Interior frame profile locks securely around bottom edge and sides of component package
- Integral horseshoe tabs in clip lock in Spring Clip edges for tight, movement-free heat sink retention
- Frame Clip is easily and safely removed with a common hand tool




SPRING CLIP

- Metal spring clip, placed through the heat sink's fin field, locks securely to both ends of the plastic frame
- Applies a steady, even pressure to the component, improving thermal performance and long-term reliability
- Spring Clip design is quickly installed or released using a common hand tool, such as a flat blade screwdriver
- Flat, twin-channel clip provides stronger retention forces and minimizes spring clip movement





clipKIT™ Packages


| COMPONENT SIZE | ASSEMBLY | PART NUMBER |
|----------------|------------|--------------|
| 15x15mm | superGRIP™ | ATS-SG150-R0 |
| 17x17mm | maxiGRIP™ | ATS-MG170-R0 |
| 17x17mm | superGRIP™ | ATS-SG170-R0 |
| 19x19mm | maxiGRIP™ | ATS-MG190-R0 |
| 19x19mm | superGRIP™ | ATS-SG190-R0 |
| 21x21mm | maxiGRIP™ | ATS-MG210-R0 |
| 21x21mm | superGRIP™ | ATS-SG210-R0 |
| 23x23mm | maxiGRIP™ | ATS-MG230-R0 |
| 23x23mm | superGRIP™ | ATS-SG230-R0 |
| 25x25mm | maxiGRIP™ | ATS-MG250-R0 |
| 25x25mm | superGRIP™ | ATS-SG250-R0 |
| 27x27mm | maxiGRIP™ | ATS-MG270-R0 |
| 27x27mm | superGRIP™ | ATS-SG270-R0 |
| 29x29mm | maxiGRIP™ | ATS-MG290-R0 |
| 29x29mm | superGRIP™ | ATS-SG290-R0 |
| 30x30mm | maxiGRIP™ | ATS-MG300-R0 |
| 30x30mm | superGRIP™ | ATS-SG300-R0 |
| 31x31mm | maxiGRIP™ | ATS-MG310-R0 |
| 31x31mm | superGRIP™ | ATS-SG310-R0 |
| 32.5x32.5mm | maxiGRIP™ | ATS-MG325-R0 |
| 32.5x32.5mm | superGRIP™ | ATS-SG325-R0 |
| 33x33mm | maxiGRIP™ | ATS-MG330-R0 |
| 33x33mm | superGRIP™ | ATS-SG330-R0 |
| 35x35mm | maxiGRIP™ | ATS-MG350-R0 |
| 35x35mm | superGRIP™ | ATS-SG350-R0 |
| 37.5x37.5mm | maxiGRIP™ | ATS-MG375-R0 |
| 37.5x37.5mm | superGRIP™ | ATS-SG375-R0 |
| 40x40mm | maxiGRIP™ | ATS-MG400-R0 |
| 40x40mm | superGRIP™ | ATS-SG400-R0 |
| 42.5x42.5mm | maxiGRIP™ | ATS-MG425-R0 |
| 42.5x42.5mm | superGRIP™ | ATS-SG425-R0 |
| 45x45mm | maxiGRIP™ | ATS-MG450-R0 |
| 45x45mm | superGRIP™ | ATS-SG450-R0 |

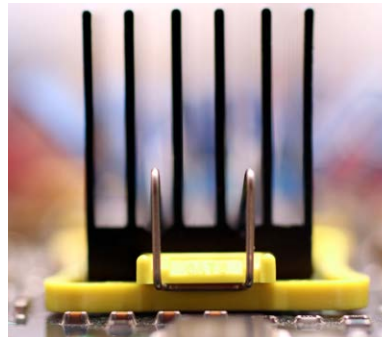


maxiGRIP™ Assembly

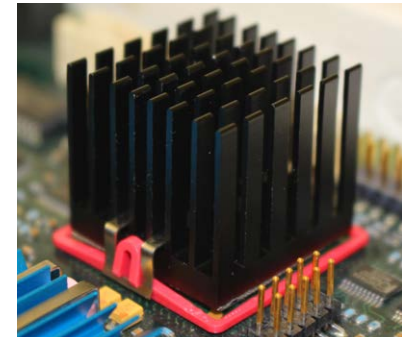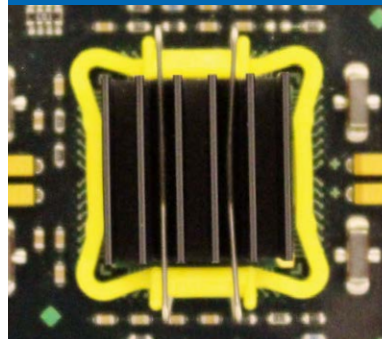

superGRIP™ Assembly

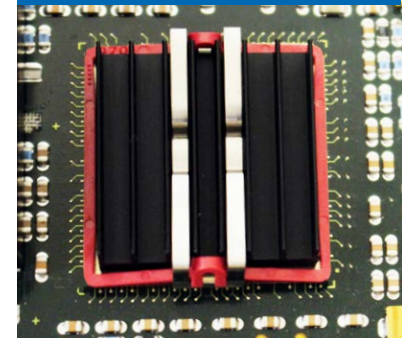

GUIDELINES FOR DETERMINING HEAT SINK COMPATIBILITY WITH clipKIT™

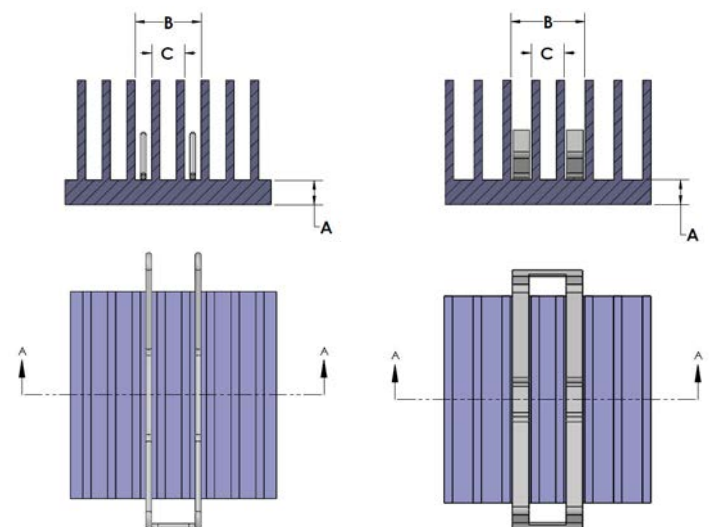


$A \geq 1.8\text{mm}$
 $A \leq 4\text{mm}$

$C \leq 4.8\text{mm}$
 $B \leq 7.3\text{mm}$



ATS ADVANCED
THERMAL
SOLUTIONS, INC.
Innovations in Thermal Management®


We Have Your PCB Covered

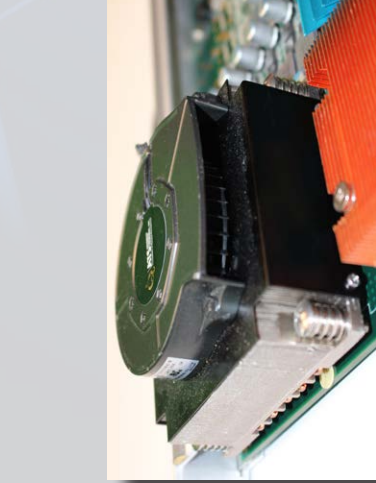


CPU Cooler



maxifLOW™ w/ superGRIP™
Attachment

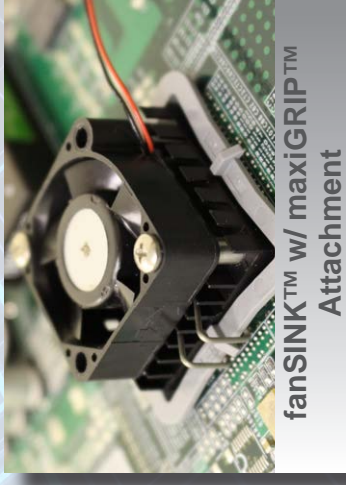



fanSINK™ w/ maxiGRIP™
Attachment

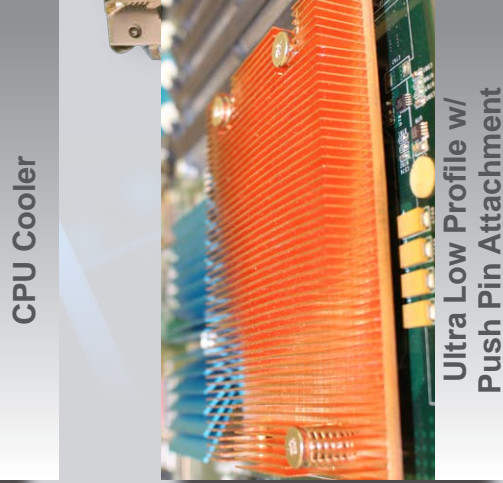


Ultra Low Profile w/
Push Pin Attachment



Power Brick Heat Sink

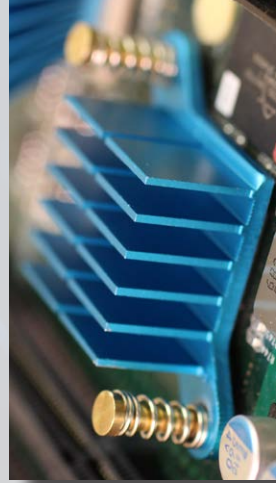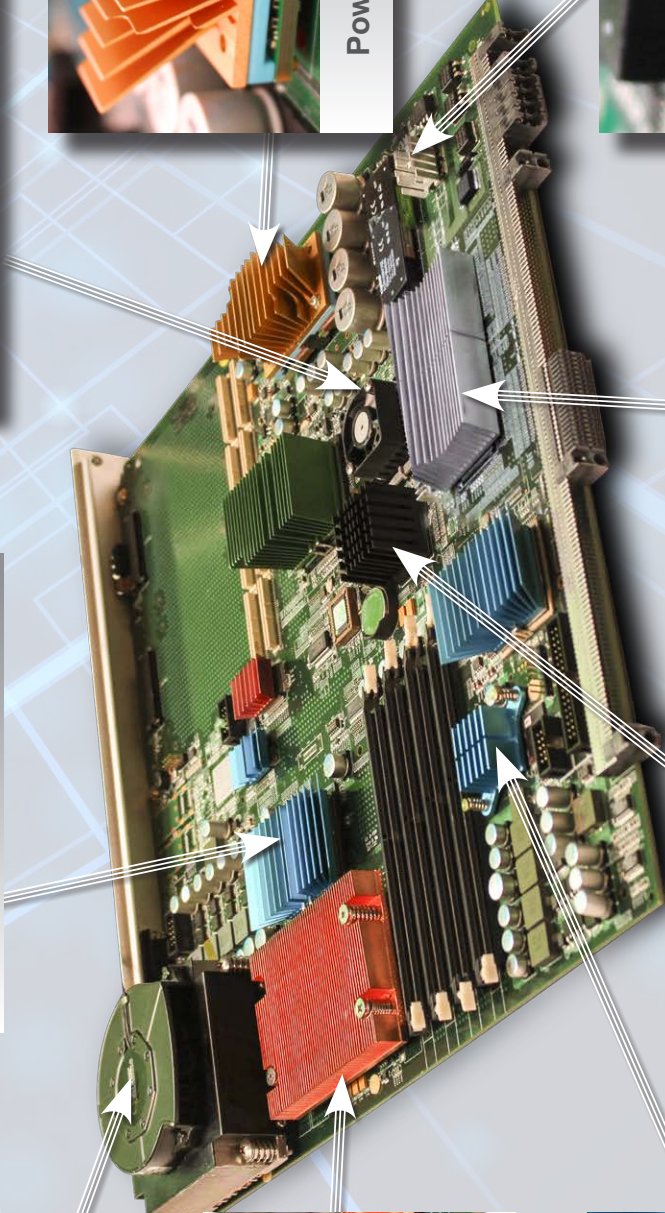


pushPIN™ Heat Sinks

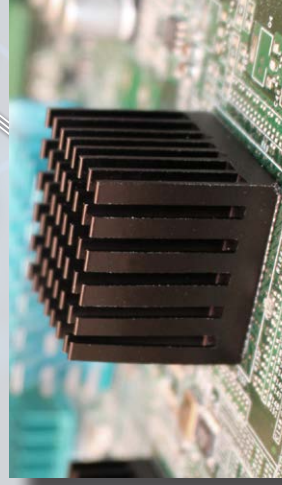

Cross Cut Heat Sink



Extrusion Profile Heat Sink

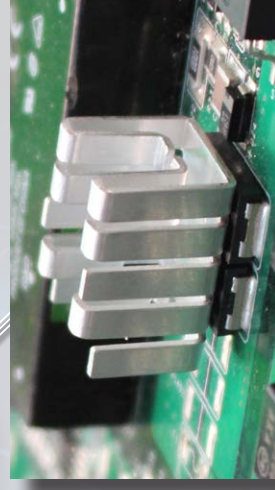

Standard Board Level Heat Sink

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9