

Part* Number	DESC Drawing Number	Relay Description
HD00CFW		Solid State Relay (SSR)
HD00CFY	88062-008	
HD02CFW		SSR with Switch Status
HD02CFY	88062-006	
HD20CFW		SSR with Short Circuit Protection
HD20CFY	88062-004	
HD22CFW		SSR with Short Circuit Protection and Switch Status
HD22CFY	88062-002	
HD24CFW		SSR with Short Circuit Protection and Trip Status
HD24CFY		

\* The Y suffix denotes parameters tested to MIL-PRF-28750 specifications. The W suffix denotes parameters tested to Teledyne specifications.

## ELECTRICAL SPECIFICATIONS

(-55°C TO +105°C UNLESS OTHERWISE NOTED)

### INPUT (CONTROL) SPECIFICATION


When used in 2 terminal configuration

(TTL or direct control) (See Fig. 1)	Min	Typ	Max	Units
Input Current @ $V_{IN} = 5$ Vdc (See Fig. 2)	14	15	mAdc	
Turn-Off Voltage (Guaranteed Off)		1.5	Vdc	
Turn-On Voltage (Guaranteed On)	3.8		Vdc	
Reverse Voltage Protection		-32	Vdc	
Input Supply Range (See Note 1)	3.8	32	Vdc	

### INPUT (CONTROL) SPECIFICATION

When used in 3 terminal configuration

(CMOS or open collector TTL) (See Fig. 1)	Min	Typ	Max	Units
Control Current				
$V_{CONTROL} = 5$ Vdc		250	$\mu$ Adc	
$V_{CONTROL} = 18$ Vdc		1	mAdc	
Control Voltage Range	0		18	Vdc
Bias Supply Voltage (See Note 1)	3.8		32	Vdc
Bias Supply Current @ $V_{BIAS} = 5$ Vdc	14	15	mAdc	
Turn Off Voltage (Guaranteed Off)	3.2		Vdc	
Turn On Voltage (Guaranteed On)		0.3	Vdc	



## FEATURES




- Available with short-circuit/current overload protection
- Available with status output
- TTL and CMOS compatible control
- Low ON resistance power FET output
- Fast switching speed
- Meets 28 Vdc system requirements of MIL-STD-704
- Optical isolation
- Low profile hermetic package
- Built and tested to the requirements of MIL-PRF-28750
- Available to 'W' and 'Y' screening levels

## DESCRIPTION

This all solid-state relay utilizes the latest technology to provide a low ON resistance and an optically isolated output. The control (input) and load (output) are optically isolated to protect input logic circuits from voltage and current transients which can occur on the output supply. The optical isolation also provides a full floating output, thus allowing the load to be connected to either output terminal. The control circuit is buffered to enable the relay to be driven directly from standard CMOS or open collector TTL logic circuits. Available options include short-circuit and current overload protection, which provides complete protection for both the relay and the system wiring. This feature not only provides protection should a short or overload occur while the relay is on, but will also provide protection should the relay be switched into a short. In either case, the relay will sense the short-circuit condition and then block it indefinitely until the short is removed and the unit is reset by cycling the input control. The second option is a status output line. This feature is available in either switch status or trip status configurations. Switch status returns the true status of the output switch and is optically isolated from the load. It provides status indication independent of the control circuit of the relay. The status line provides a logic (0) low when the input circuit is off and load circuit continuity is present. The status line provides a logic 1 (high) when the output is on. Trip status, available only with HD24 Series relays, returns a logic 0 (low) if the output trips off and a logic 1 (high) when the output is in a normal mode (on or off). These options are available either together or separately as standard features.

**OUTPUT (LOAD) SPECIFICATIONS**

(See Note 2)	Min	Typ	Max	Units
Continuous Load Current @ +25°C (See Fig. 3)	2.1		Adc	
Leakage Current @ $V_{LOAD}$ = 60 Vdc				
HD00CF, HD20CF	0.1		mA	
HD24CF	0.1		mA	
HD02CF	2		mA	
HD22CF	2		mA	
Output Voltage Drop	0.5		Vdc	
Continuous Operating Load Voltage	60		Vdc	
Transient Blocking Voltage (See Note 3)	80		Vdc	
ON Resistance $R_{ds}$ (on) at $T_J = 25^\circ\text{C}$	0.15		Ohm	
(See Note 4)				
Turn-On Time (See Fig. 5)				
HD00CF, HD20CF	3		ms	
HD24CF	2		ms	
HD02CF, HD22CF	3		ms	
Turn-Off Time (See Fig. 5)	1		ms	
Electrical System Spike	$\pm 600$		Vdc	
Output Capacitance at 25 Vdc, 100 KHz	850		pF	
Input to Output Capacitance	10		pF	
Dielectric Strength	1000		Vac	
Insulation Resistance @ 500 Vdc	$10^9$		Ohm	
Output Junction Temperature @ $I_{LOAD} = I_{MAX\ RATED}$	125		°C	
Maximum Junction Temperature ( $T_J$ Max)	125		°C	
Thermal Resistance Junction to Ambient ( $\theta_{JA}$ )	90		°C/W	
Thermal Resistance Junction to Case ( $\theta_{JC}$ )	25		°C/W	

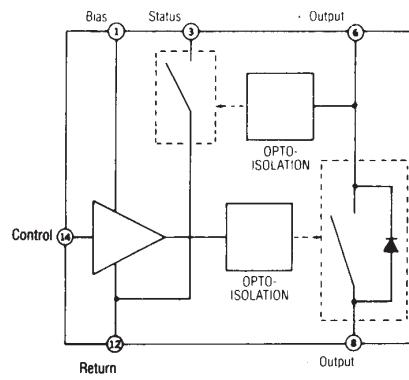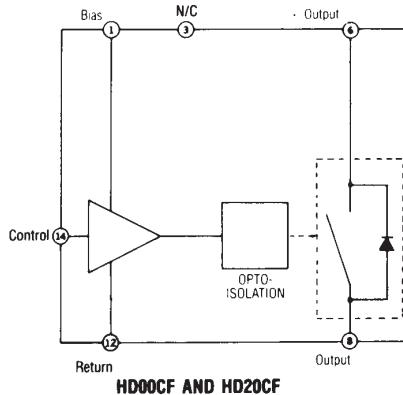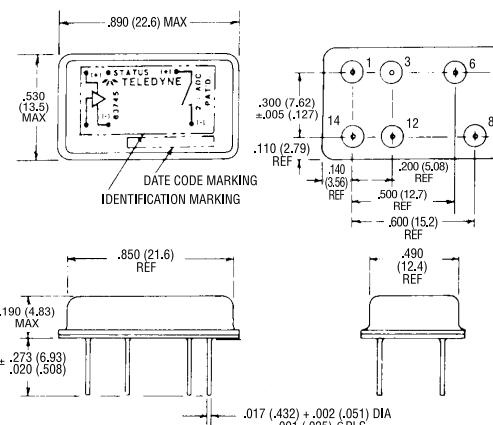**BLOCK DIAGRAM**

**MECHANICAL SPECIFICATIONS**


- **Weight:** 5.5 gm max
- **Case:** Hermetically sealed DIP
- **Material and Plating:**  
Pins and Header: Kovar gold plated per MIL G-45204 Type III, Grade A, Class 1

DIMENSIONS ARE SHOWN IN INCHES  
(MILLIMETERS)

**STATUS OUTPUT SPECIFICATIONS  
(HD02CF AND HD22CF)**

(See Note 6)	Min	Typ	Max	Units
Status Supply Voltage (See Fig. 1)	1	18	Vdc	
Status Leakage Current		10	$\mu$ Adc	
Status (sink) Current ( $V_{SO} < 0.4$ Vdc)		600	$\mu$ Adc	
Status Turn-On Time (See Fig. 6)		3.5	ms	
Status Turn-Off Time (See Fig. 6)		8.0	ms	

**STATUS OUTPUT TRUTH TABLE  
(HD02CF AND HD22CF)**

Control Voltage	Output (Switch) State	Status Output Level
High	Off	Low ( $V_{SO} \leq 0.4$ Vdc)
Low	On	High ( $V_{SO} = V_{STATUS}$ )

**ENVIRONMENTAL SPECIFICATIONS**






	Min	Typ	Max	Units
Temperature Range				
Operating	-55		+105	°C
Storage	-55		+125	°C
Vibration, 100 g	10		3000	Hz
Constant Acceleration			5000	g
Shock, 11 ms pulse		50		g

**SHORT CIRCUIT PROTECTION SPECIFICATIONS  
(HD20CF AND HD22CF)**

(At TA = 25°C)	Min	Typ	Max	Units
Time to Trip Turning relay ON into a short	400			$\mu$ s
Time to Trip Shorting load while relay is ON	280			$\mu$ s


**STATUS OUTPUT TRUTH TABLE (HD24CF)**

Output (Switch) State	Status Output Level
Tripped	Low ( $V_{SO} \leq 0.4$ Vdc)
Not Tripped	High ( $V_{SO} = V_{STATUS}$ )

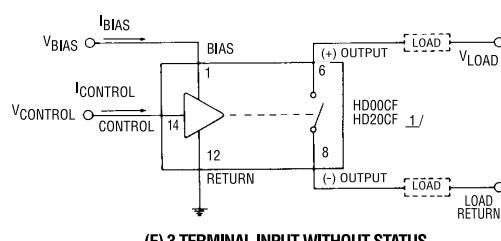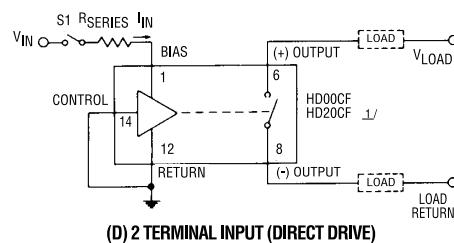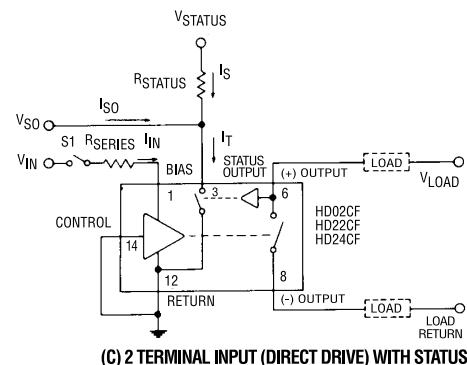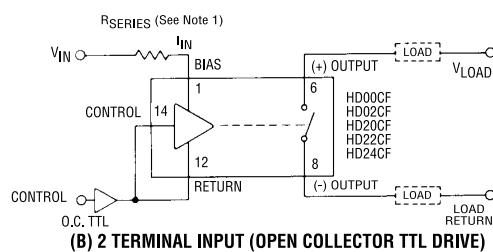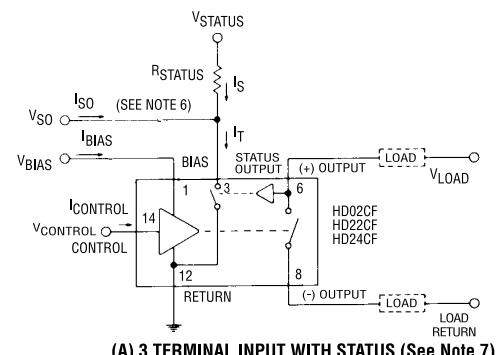


<sup>1/</sup> HD02CF and HD22CF may be wired without the status line as shown in (D) and (E) above.


**WIRING CONFIGURATIONS**
**FIGURE 1**

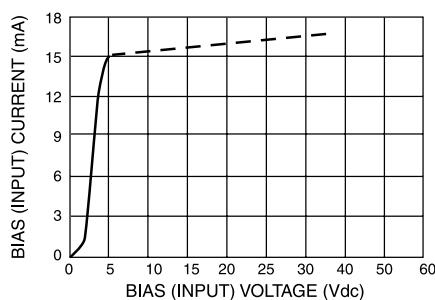


**BIAS (INPUT) CURRENT VS BIAS (OUTPUT) VOLTAGE**  
**FIGURE 2 (See Note 1)**

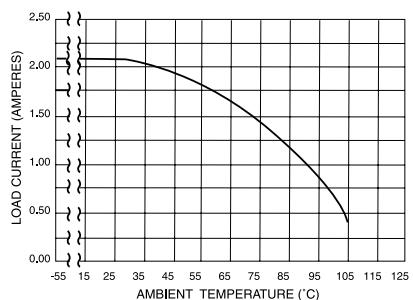


**LOAD CURRENT DERATING CURVE**  
**FIGURE 3**




**NORMALIZED ON RESISTANCE VS JUNCTION TEMPERATURE**  
**FIGURE 4 (See Note 4)**

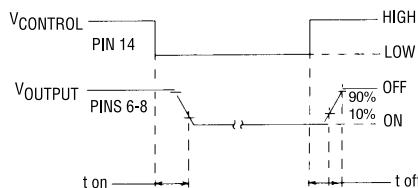


**OUTPUT TURN-ON AND TURN-OFF TIMING**  
**FIGURE 5**

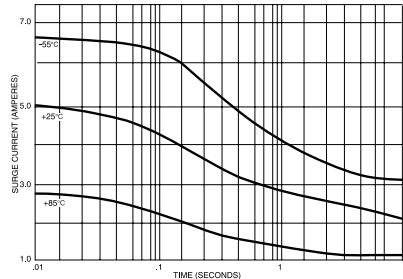

**TYPICAL TRIP CURRENT VS TIME**  
**FIGURE 7 (See Note 5)**

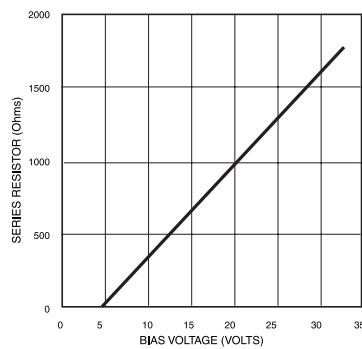

**SERIES LIMIT BIAS RESISTOR VS BIAS VOLTAGE**  
**FIGURE 8 (See Note 1)**

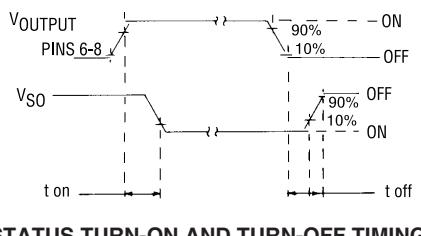

**STATUS TURN-ON AND TURN-OFF TIMING (HD02CF & HD22CF)**  
**FIGURE 6**

## NOTES:

- Control input is compatible with CMOS or open collector TTL (with pull up resistor). For bias voltages above 6V, a series resistor is required. Use the standard resistor value equal to or less than the value found in Figure 8.
- The rated input voltage is 5V for all tests unless otherwise specified.
- Transient blocking voltage test is performed per MIL-STD-704 (28 Vdc systems).
- To calculate the maximum ON resistance for a given junction temperature, find the normalized ON resistance factor (NR) from Figure 4. Calculate the new ON resistance as follows:

$$R_{(ON)} = NR \cdot R_{(ON)} @ 25^\circ C$$

- Overload testing to the requirements of MIL-PRF-28750 is constrained to the limits imposed by the short circuit protection characteristics as defined in this specification. System series inductance for "shorted-load" mode of operation should be 30 mH MAXIMUM. Maximum repetition rate into a shorted load should not exceed 10 Hz.
- A status pull up resistor is required for proper operation of the status output. Determine the current (Is) required by the status interface. Calculate the current (Is) through the status resistor such that the sink current through the status output is 0.6 mA. Select the status resistor such that it does not allow more than 0.6 mA to flow through the status output.

$$R_{(STATUS)} = \frac{V_{(STATUS)} - 0.4V}{0.6 \text{ mA} - Is}$$

- Inductive loads should be diode suppressed. Input transitions should be  $\leq 1$  ms duration and the input drive should be a bounceless contact type.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9