

Features

TRIAC Dimmable LED Driver

- Triac –dimmable with leading or trailing edge dimmers
- Class II with SELV output (no earth required)
- Extra-large screw terminals and integrated cable clamps for easy installation
- Power factor corrected >0.95
- Dimming range 1..100%
- Compatible with a wide range of dimmers

RACT12

12 Watt TRIAC Dimmable Single Output



Description

The RACT12-xxx series are low cost, triac-dimmable, constant current 12W LED drivers available with either 300mA, 350mA, 500mA or 700mA full-range outputs. The drivers are Class II (double insulated) meaning no earth connection is required. The phase angle dimming works with leading or trailing edge dimmers. The RACT12 is suitable for indoor locations up to 50°C ambient temperature and is certified for building into furniture for applications such as dimmable shelf lighting, cove lighting or accent lighting. It is CE marked (LVD + EMC + RoHS), EAC and has IEC61347-1/IEC61347-2-13 CB report certification.


Selection Guide

| Part Number | Input Voltage Range [VAC] | Output Voltage Range [VDC] | Output Current [mA] | Efficiency min. @rated load [%] | Output Power [W] |
|-------------|---------------------------|----------------------------|---------------------|---------------------------------|------------------|
| RACT12-300 | 198-264 | 20-40 | 300 | 82 | 12 |
| RACT12-350 | 198-264 | 18-35 | 350 | 81 | 12 |
| RACT12-500 | 198-264 | 12-24 | 500 | 81 | 12 |
| RACT12-700 | 198-264 | 9-18 | 700 | 81 | 12 |

All LED Drivers may not be used without a load. They must be switched on the primary side only. Noncompliance may damage the LED or reduce its lifetime.



Model Numbering

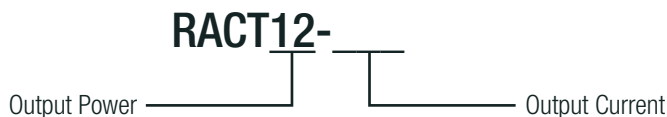

Specifications (measured @ Ta= 25°C, 240VAC, rated load unless otherwise specified)

| BASIC CHARACTERISTICS | | | | |
|---------------------------|-----------|--------|--------|--------|
| Parameter | Condition | Min. | Typ. | Max. |
| Input Voltage Range | | 198VAC | 230VAC | 264VAC |
| Input Current | | | | 80mA |
| Inrush Current | full load | | | 5A |
| No Load Power Consumption | | | | 1W |
| Input Frequency Range | | 50Hz | | 60Hz |
| Power Factor | full load | 0.95 | | |

continued on next page

IEC/EN61347 certified
 IEC/EN61347-2-13 certified
 EN61547 certified
 EN62493 certified
 EN55015 compliant
 CB report

Specifications (measured @ Ta= 25°C, 240VAC, rated load unless otherwise specified)

| Parameter | Condition | Min. | Typ. | Max. |
|--------------------------------------|-----------|------|-------|-------|
| THD | full load | | | 25% |
| Start-up Time | | | | 500ms |
| Internal Operating Frequency | | | 60kHz | |
| Output Ripple Current ⁽¹⁾ | | | | 200mA |

Notes:
 Note1: Measured at 20MHz BW by using a 12" twisted pair-wie terminated with a 0.1µF and 47µF capacitor parallel across output

| REGULATIONS | | |
|-----------------|-----------|----------|
| Parameter | Condition | Value |
| Output Accuracy | | ±5% typ. |
| Load Regulation | | 5% max. |
| Line Regulation | | 5% max. |

| PROTECTION | | |
|-----------------------------------|--|---|
| Parameter | Condition | Value |
| Input Fuse | | fusible resistor |
| Short Circuit Protection (SCP) | | Latch OFF, auto recovery after fault condition is removed |
| Over Voltage Protection (OVP) | RACT12-300 RACT12-350 RACT12-500 RACT12-700 | 50VDC max. 42VDC max. 30VDC max. 26VDC max. Latch OFF, auto recovery after fault condition is removed |
| Over Load Protection (OLP) | | Latch OFF, auto recovery after fault condition is removed |
| Over Temperature Protection (OTP) | 110°C | Latch OFF, auto recovery after fault condition is removed |
| Isolation Voltage | I/P to O/P tested for 1 minute | 3.75kVAC |
| Leakage Current | | 5mA max. |

Maximum loading of automatic circuit breakers*

* @ 230VAC, 10hm, 90° phase angle and max. load

| Circuit Breaker | Circuit Breaker Current | | | |
|-----------------|-------------------------|-----|-----|-----|
| | 10A | 16A | 20A | 25A |
| Typ | | | | |
| B | 36 | 57 | 69 | 85 |
| C | 57 | 87 | 109 | 134 |


| ENVIRONMENTAL | | |
|-----------------------------|--|--|
| Parameter | Condition | Value |
| Operating Temperature Range | without derating @ natural convection 0.1m/s (see graph) | -20°C to +50°C |
| Max. Case Temperature | at tc point | +80°C max. |
| Operating Humidity | non-condensing | 5-85% RH |
| IP Rating | | IP20 |
| Pollution Degree | | PD2 |
| Design Lifetime | +25°C ambient | RACT12-300 all others |
| | | >40 x 10 ³ hours >30 x 10 ³ hours |

continued on next page

Specifications (measured @ Ta= 25°C, 240VAC, rated load unless otherwise specified)

Derating Graph

(@ Chamber and natural convection 0.1 m/s)

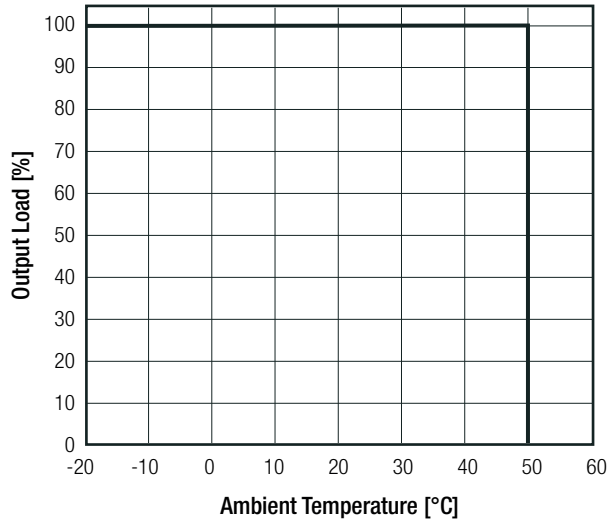

SAFETY AND CERTIFICATIONS



| Certificate Type (Safety) | Report Number | Standard |
|--|--|--|
| Lamp controlgear Part 1: General and safety requirements (CB Scheme) | 325797 | IEC61347-1:2007 2nd Edition + A2:2012 |
| Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (CB Scheme) | 325797 | IEC61347-2-13:2014 2nd Edition |
| Lamp controlgear Part 1: General and safety requirements (LVD) | | EN61347-1:2015 |
| Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules (LVD) | | EN61347-2-13:2014 + A1:2017 |
| Lamp controlgear Part 1: General and safety requirements | 325797 | EN61347-1:2008 + A2:2013 |
| Lamp controlgear Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules | 325797 | EN61347-2-13:2014 |
| EAC | RU-AT.49.09571 | TP TC 004/2011 |
| RoHS 2+ | | RoHS 2011/65/EU + AM2015/863 |
| EMC Compliance | Condition | Standard / Criterion |
| Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment | 305985 | EN55015:2013 + A1:2015 |
| Equipment for general lighting purposes – EMC immunity requirements | | EN61547:2009 |
| Assessment of lighting equipment related to human exposure to electromagnetic fields | | EN62493:2015 |
| ESD Electrostatic discharge immunity test | Air ±8kV, Contact ±4kV | EN61000-4-2:2009, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m | EN61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port: ±1kV DC Power Port: ±0.5kV | EN61000-4-4:2012, Criteria A |
| Surge Immunity | AC Power Port: ±0.5kV | EN61000-4-5:2014, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3V/m | EN61000-4-6:2014, Criteria A |
| Voltage Dips and Interruptions | Voltage Dips >95% | EN61000-4-11:2004, Criteria B |
| Voltage Dips and Interruptions | Voltage Dips 30% | EN61000-4-11:2004, Criteria B |
| Limits of Harmonic Current Emissions | | EN61000-3-2:2014, Class C |
| Limits of Voltage Fluctuations & Flicker | | EN61000-3-3:2013, Clause 5 |

Specifications (measured @ Ta= 25°C, 240VAC, rated load unless otherwise specified)




DIMENSION and PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|---------------------------|------|-----------------------|
| Material | case | plastic (UL94V-0) |
| | PCB | FR4 (UL94V-0) |
| Package Dimension (LxWxH) | | 109.0 x 40.0 x 22.0mm |
| Package Weight | | 70g typ. |

Dimensions Drawing (mm)

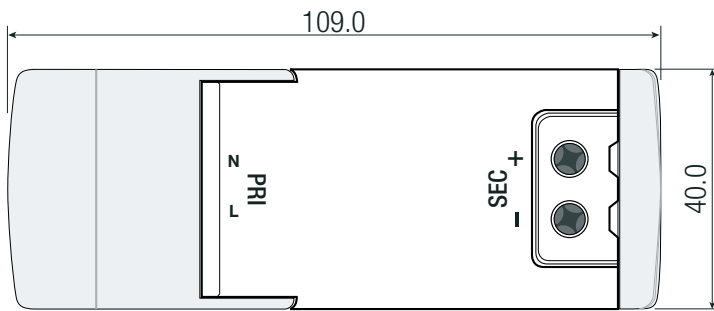

wire stripping length: 6-7mm
recommended tightening torque: 0.25Nm
tc= case temperature measuring point
FC= fixing centers
Tolerance: xx.x= ±1.0mm
xx.xx= ±0.5mm

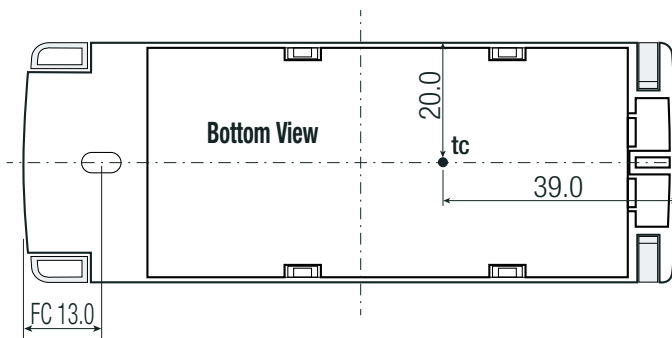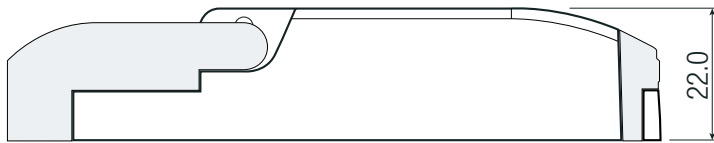


Connection via Screw Terminal

| Function | Solid Wire | Stranded Wire ⁽²⁾ | AWG |
|------------|-------------------------|------------------------------|-------|
| VAC in (N) | 0.75-2.5mm ² | 0.75-2.5mm ² | 20-14 |
| VAC in (L) | 0.75-2.5mm ² | 0.75-2.5mm ² | 20-14 |
| LED+ | 0.5-2.5mm ² | 0.5-2.5mm ² | 21-14 |
| LED- | 0.5-2.5mm ² | 0.5-2.5mm ² | 21-14 |

Notes:

Note2: The use of sleeve or ferrule terminations is recommended

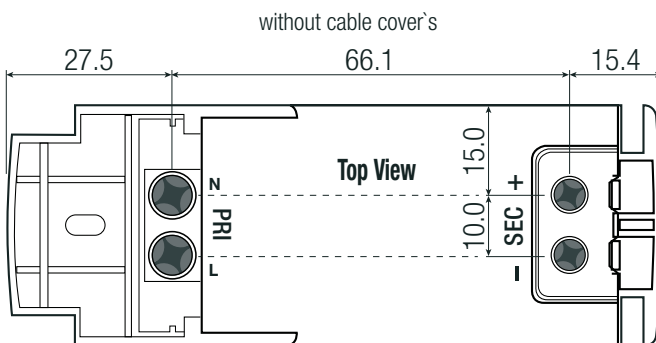

Specifications (measured @ Ta= 25°C, 240VAC, rated load unless otherwise specified)

INSTALLATION and APPLICATION

| Dimming Type | Value |
|--------------|---|
| AC phase-cut | work with leading/trailing edge dimmers |



PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|----------------|------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 270.0 x 127.0 x 48.0mm |
| Packaging Quantity | | 10pcs |
| Storage Temperature Range | | -20°C to +70°C |
| Storage Humidity | non-condensing | 5-85% RH |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9