

SPECIFICATION CONTROL DRAWING

SCD

400R1121

Title

TWO CONDUCTOR CABLE, SHIELDED, JACKETED, LIMITED FIRE HAZARD, 600 VOLT

Date

3-8-16

Revision

B

This specification sheet forms a part of the latest issue of Raychem Specification WCD 3114.

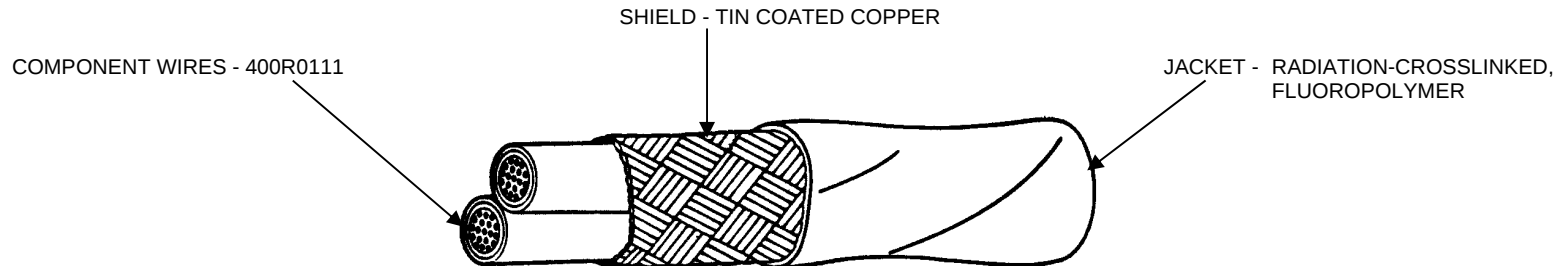


TABLE I. CABLE CONSTRUCTION DETAILS

PART NUMBER <u>1/</u>	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch) (mm)		OUTSIDE DIAMETER (inch) (mm)		MAXIMUM WEIGHT (lbs/1000 ft.) (kg/km)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
400R1121-26-*	26	38	.006 (.152)	.008 (.203)	.101 (2.57)	.106 (2.69)	8.3 (12.4)
400R1121-24-*	24	36	.006 (.152)	.008 (.203)	.117 (2.97)	.123 (3.12)	11.5 (17.1)
400R1121-22-*	22	36	.006 (.152)	.008 (.203)	.131 (3.33)	.138 (3.51)	14.7 (21.9)
400R1121-20-*	20	36	.006 (.152)	.008 (.203)	.147 (3.73)	.154 (3.91)	18.9 (28.1)
400R1121-18-*	18	36	.007 (.178)	.009 (.229)	.169 (4.29)	.177 (4.50)	25.7 (38.2)
400R1121-16-*	16	36	.007 (.178)	.009 (.229)	.183 (4.65)	.192 (4.88)	30.4 (45.2)
400R1121-14-*	14	36	.007 (.178)	.009 (.229)	.217 (5.51)	.228 (5.79)	42.5 (63.2)
400R1121-12-*	12	36	.007 (.178)	.009 (.229)	.255 (6.48)	.268 (6.81)	59.8 (89.0)
400R1121-10-*	10	36	.008 (.203)	.010 (.254)	.299 (7.59)	.314 (7.98)	86.3 (128.)

NOTE: Nominal values are for information only. Nominal values are not requirements.

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.





SPECIFICATION CONTROL DRAWING

Page

2 of 2

Revision

B

SCD

400R1121

TABLE II. CABLE PERFORMANCE DETAILS

PART NUMBER <u>1/</u>	BEND TESTING			
	MANDREL DIAMETER (inch) (mm) (± 3%)		WEIGHT (lb) (kg) (± 3%)	
	ACCELERATED AGING	COLD BEND	ACCELERATED AGING	COLD BEND
400R1121-26-*	3.00 (76.2)	3.00 (76.2)	.250 (.113)	1.50 (.680)
400R1121-24-*	3.00 (76.2)	3.00 (76.2)	.375 (.170)	1.50 (.680)
400R1121-22-*	6.00 (152.)	6.00 (152.)	.375 (.170)	3.00 (1.36)
400R1121-20-*	6.00 (152.)	6.00 (152.)	.375 (.170)	3.00 (1.36)
400R1121-18-*	6.00 (152.)	6.00 (152.)	.500 (.227)	3.00 (1.36)
400R1121-16-*	6.00 (152.)	6.00 (152.)	.500 (.227)	3.00 (1.36)
400R1121-14-*	6.00 (152.)	6.00 (152.)	1.00 (.454)	9.00 (4.08)
400R1121-12-*	10.0 (254.)	10.0 (254.)	1.00 (.454)	9.00 (4.08)
400R1121-10-*	10.0 (254.)	10.0 (254.)	1.00 (.454)	9.00 (4.08)

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 125°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

ACCELERATED AGING: 300 ± 3°C for 6 hours

BLOCKING: 150 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 2500 volts (rms), 60 Hz, 1 minute

FLAMMABILITY: Char Length, 5 ft. (1.5 m) (maximum)

JACKET COLOR: White preferred

JACKET CONCENTRICITY: 70% (minimum)

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 200% (minimum)

Tensile Strength, 4000 lbf/in² (27.6 MPa) (minimum)

JACKET FLAWS:

Spark Test, 1.5 kV (rms)

Impulse Dielectric Test, 6.0 kV (peak)

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

SMOKE RELEASE:

Peak Smoke Release Rate, 0.40 m²/s (maximum)Total Smoke Release, 150 m² (maximum)

SMOKE TEST: D4, 50 (maximum); Dm, 300 (maximum)

TOXICITY: HCN: 100 ppm (maximum)

SO₂: 100 ppm (maximum)

CO: 3500 ppm (maximum)

HF: 100 ppm (maximum)

NO: 100 ppm (maximum)

HCl: 500 ppm (maximum)

VOLTAGE WITHSTAND (Post Environmental): 1000 volts (rms), 60 Hz, 1 minute

1/ PART NUMBER:

The "*" in the part numbers in Tables I and II shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 20, black and brown component wires; white jacket:
400R1121-20-0/1-9

CABLE IDENTIFICATION:

Jacket shall be marked in contrasting color as follows:

"RAYCHEM 400R1121-xx - 600V Yr of Mfg" (xx = applicable AWG size)

1/ See footer section on page 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9