

Hall Effect Current Sensors L32P***S05BFS Series



Features:

- Open Loop type
- Printed circuit board mounting
- Unipolar power supply
- Industrial temperature range
- Sulfur-proof as standard
- Bus bar version available for 50A & 100A models
- Insulated plastic case according to UL94V0

Advantage:

- Excellent accuracy and linearity
- Wide nominal current range
- Low temperature drift
- Wide frequency bandwidth
- No insertion loss
- High Immunity To External Interference
- Optimised response time
- Current overload capability

Specifications


$T_A=25^{\circ}\text{C}$, $V_{CC}=+5\text{V}$, $R_L=10\text{k}\Omega$

| Parameters | Symbol | L32P050S05BFS | L32P100S05BFS | L32P150S05BFS | L32P200S05BFS | L32P300S05BFS | L32P400S05BFS |
|--|--------------------|--|--|--|-------------------|-------------------------|-------------------------|
| Rated current | I_f | 50A | 100A | 150A | 200A | 300A | 400A |
| Maximum Current | I_{fmax} | $\pm 150\text{A}$ | $\pm 300\text{A}$ | $\pm 450\text{A}$ | $\pm 600\text{A}$ | $\geq \pm 600\text{AT}$ | $\geq \pm 600\text{AT}$ |
| Primary conductor | | Aperture or Bus Bar | | Aperture | | | |
| Output Voltage | V_{OUT} | $V_{REF} + 0.625\text{V} \pm 0.015\text{V} @ \pm I_f$ | | | | | |
| Offset Voltage | V_{OE} | $V_{REF} \pm 0.025\text{V} @ I_f = 0\text{A}$ | | | | | |
| Reference voltage | V_{REF} | $+2.5\text{V} \pm 0.020\text{V}$ | | | | | |
| Output Linearity ¹ | ϵ_L | $\leq \pm 0.5\% @ 0\text{A}, 0.5 I_f, I_f$ | | | | | |
| Power Supply | V_{CC} | $+5\text{V} \pm 5\%$ | | | | | |
| Current Consumption | I_C | $\leq 15\text{mA}$ | | | | | |
| Response Time ² | t_r | $\leq 5\mu\text{s} (@ di/dt = \text{F.S.} / \mu\text{s})$ | | | | | |
| Output Temperature Characteristic ¹ | TCV_{OUT} | $\leq \pm 1.5\text{mV}/^{\circ}\text{C}$ | | | | | |
| Offset Temperature Characteristic | TCV_{OE} | $\leq \pm 1.0\text{mV}/^{\circ}\text{C} @ I_f = 0\text{A}$ | $\leq \pm 0.5\text{mV}/^{\circ}\text{C} @ I_f = 0\text{A}$ | $\leq \pm 0.3\text{mV}/^{\circ}\text{C} @ I_f = 0\text{A}$ | | | |
| Reference Temperature Characteristic | TCV_{REF} | $\leq \pm 0.012\% / ^{\circ}\text{C}$ | | | | | |
| Hysteresis error | V_{OH} | $\leq 7.5\text{mV} (0\text{A} \leftrightarrow I_f)$ | $\leq 5.0\text{mV} (0\text{A} \leftrightarrow I_f)$ | $\leq 2.5\text{mV} (0\text{A} \leftrightarrow I_f)$ | | | |
| Withstand Voltage | V_d | AC2500V for 1minute (sensing current 0.5mA), inside of aperture \leftrightarrow terminal | | | | | |
| Insulation Resistance | R_{IS} | $> 500\text{M}\Omega (500\text{V DC})$, inside of aperture \leftrightarrow terminal | | | | | |
| Frequency Bandwidth ³ | f | DC .. 50kHz | | | | | |
| Operating Temperature | T_A | $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ | | | | | |
| Storage Temperature | T_S | $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ | | | | | |


¹ Without offset — ² Time between 10% input current full scale and 90% of sensor output full scale — ³ Small signal only to avoid excessive heating of magnetic core

Electrical Performances

Frequency Characteristic data not yet available

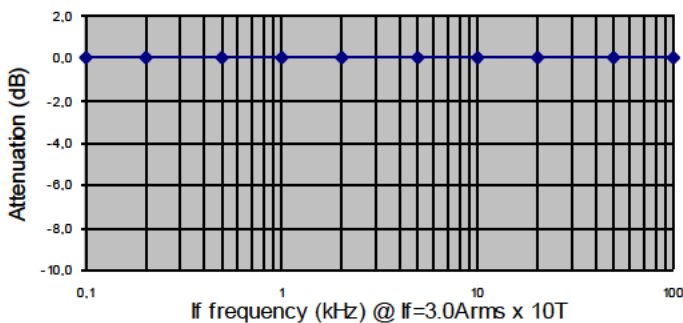


Saturation Characteristic data not yet available

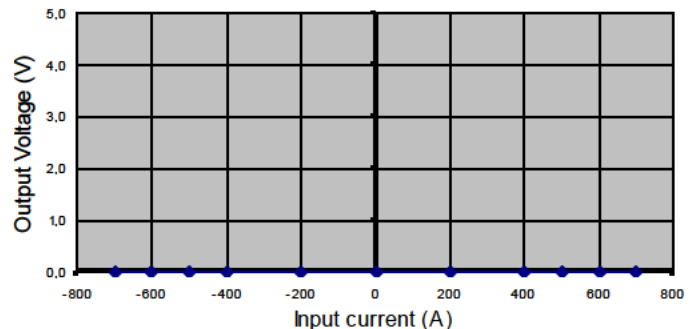


Hall Effect Current Sensors L32P***S05BFS Series

Mechanical dimensions in mm

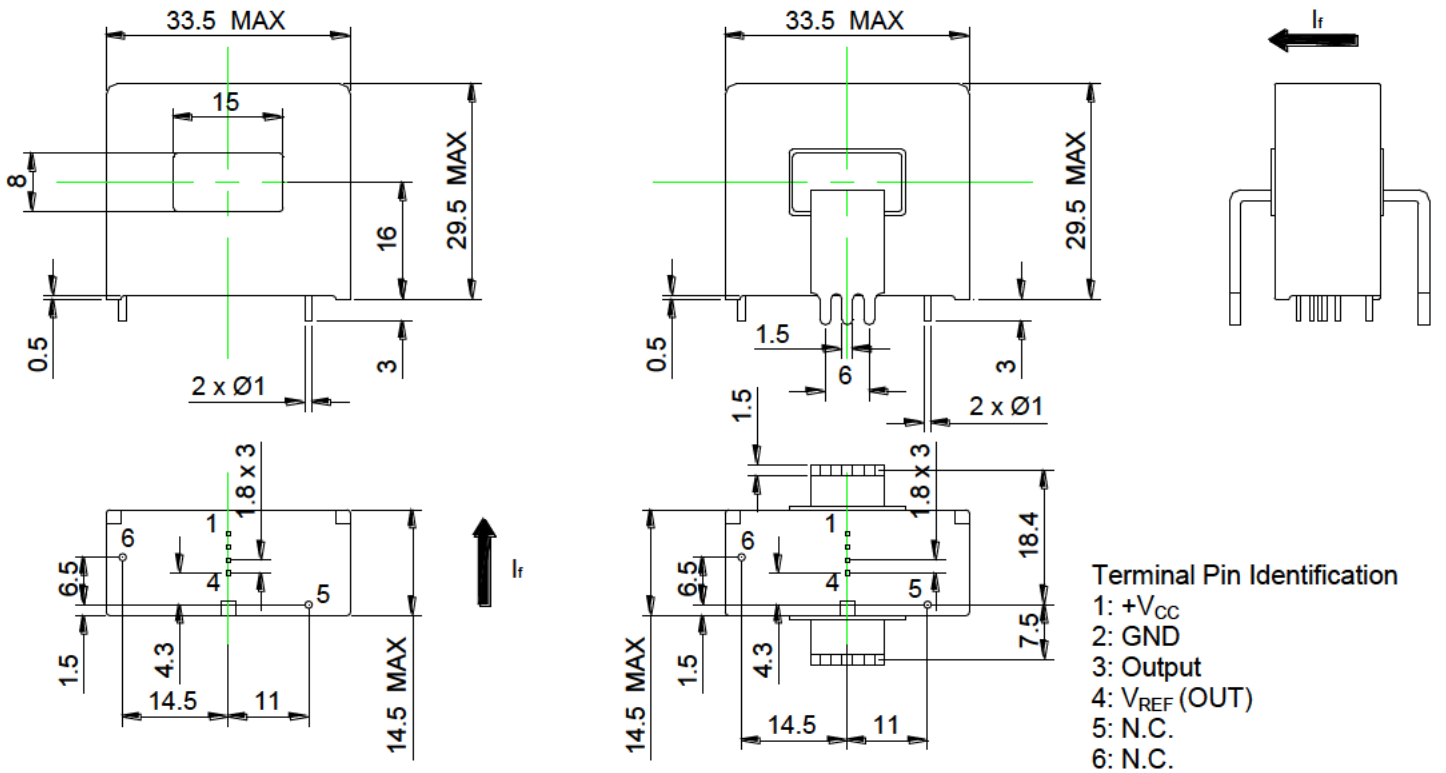

Electrical connection diagram

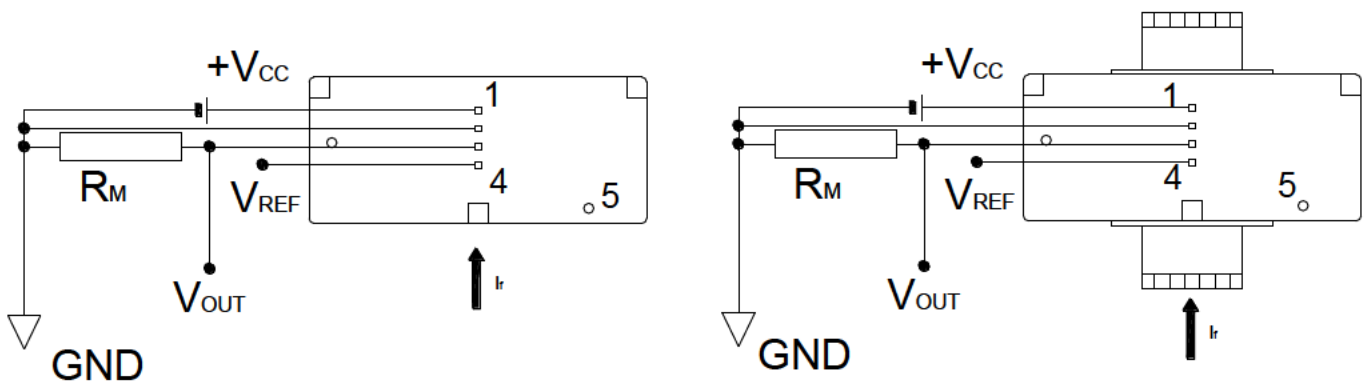

Package & Weight Information

| Weight | Pcs/box | Pcs/carton | Pcs/pallet |
|--------|---------|------------|------------|
| | | | |

Saturation Characteristics

L32P050S05(B)FS


P.3

Saturation characteristic

at $V_{cc}=+5V$, $R_L=10k\Omega$, $T_a=+25^\circ C$

| Input current (A) | Output voltage (V) | | | | | Theoretical value (V) |
|-------------------|--------------------|-------|-------|-------|-------|-----------------------|
| | No.1 | No.2 | No.3 | No.4 | No.5 | |
| 210.0 | 4.981 | 4.981 | 4.981 | 4.981 | 4.981 | 5.000 |
| 200.0 | 4.980 | 4.981 | 4.980 | 4.980 | 4.980 | 4.995 |
| 197.5 | 4.975 | 4.975 | 4.971 | 4.978 | 4.976 | 4.964 |
| 195.0 | 4.945 | 4.945 | 4.940 | 4.947 | 4.945 | 4.933 |
| 190.0 | 4.882 | 4.882 | 4.877 | 4.884 | 4.882 | 4.870 |
| 185.0 | 4.819 | 4.819 | 4.814 | 4.821 | 4.819 | 4.808 |
| 175.0 | 4.693 | 4.693 | 4.689 | 4.695 | 4.693 | 4.683 |
| 150.0 | 4.378 | 4.378 | 4.374 | 4.380 | 4.378 | 4.370 |
| 100.0 | 3.749 | 3.750 | 3.746 | 3.749 | 3.748 | 3.745 |
| 50.0 | 3.120 | 3.122 | 3.120 | 3.119 | 3.120 | 3.120 |
| 25.0 | 2.807 | 2.809 | 2.807 | 2.805 | 2.807 | 2.808 |
| 0.0 | 2.495 | 2.499 | 2.498 | 2.494 | 2.495 | 2.495 |
| -25.0 | 2.190 | 2.194 | 2.195 | 2.188 | 2.189 | 2.183 |
| -50.0 | 1.874 | 1.878 | 1.880 | 1.871 | 1.873 | 1.870 |
| -100.0 | 1.243 | 1.248 | 1.251 | 1.239 | 1.242 | 1.245 |
| -150.0 | 0.612 | 0.617 | 0.621 | 0.606 | 0.610 | 0.620 |
| -175.0 | 0.296 | 0.301 | 0.306 | 0.290 | 0.295 | 0.308 |
| -185.0 | 0.169 | 0.175 | 0.180 | 0.163 | 0.168 | 0.183 |
| -190.0 | 0.106 | 0.112 | 0.117 | 0.100 | 0.105 | 0.120 |
| -195.0 | 0.043 | 0.049 | 0.054 | 0.037 | 0.042 | 0.058 |
| -197.5 | 0.013 | 0.018 | 0.022 | 0.008 | 0.011 | 0.026 |
| -200.0 | 0.008 | 0.008 | 0.008 | 0.008 | 0.008 | 0.000 |
| -210.0 | 0.008 | 0.008 | 0.008 | 0.008 | 0.008 | 0.000 |

Saturation characteristic (Internal Reference)

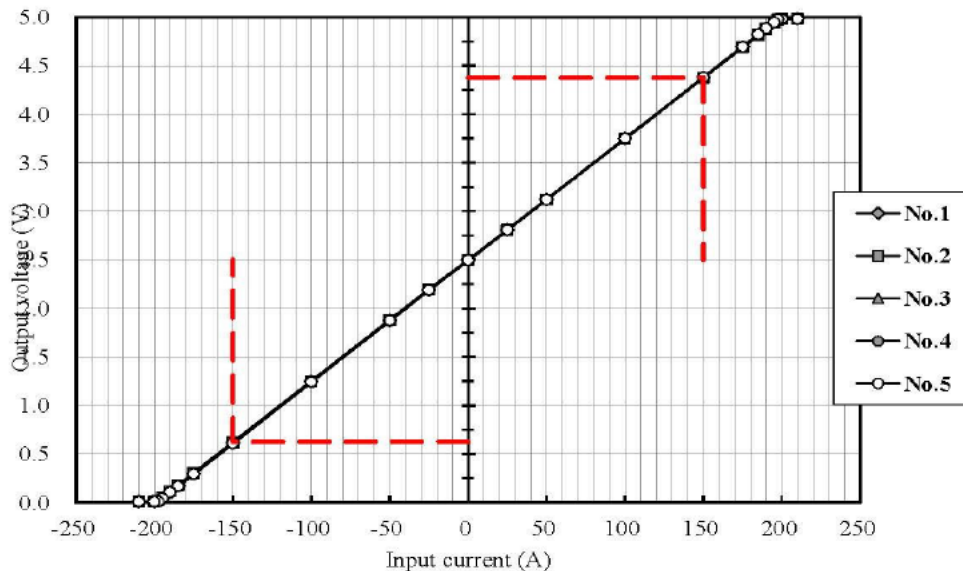

Frequency Characteristics

L32P150S05FS


P.4

Frequency characteristic (Reference)

at Detected current $I_f = 3.2 \times 12 \text{ A}$, $V_{cc} = +5 \text{ V}$, $R_L = 10 \text{ k}\Omega$, $T_a = +25^\circ \text{C}$

| If frequency (kHz) | Output voltage - Offset voltage (mVrms) | | | | | Remarks |
|--------------------|---|-----|-----|-----|-----|---------|
| | CH1 | CH2 | CH3 | CH4 | CH5 | |
| 0.1 | 165 | 165 | 168 | 166 | 166 | |
| 0.2 | 165 | 165 | 168 | 166 | 166 | |
| 0.5 | 164 | 164 | 167 | 165 | 165 | |
| 1.0 | 165 | 164 | 168 | 166 | 166 | |
| 2.0 | 165 | 164 | 168 | 166 | 165 | |
| 5.0 | 165 | 166 | 169 | 166 | 166 | |
| 10.0 | 165 | 168 | 171 | 166 | 165 | |
| 20.0 | 166 | 176 | 178 | 168 | 163 | |
| 50.0 | 165 | 185 | 188 | 170 | 158 | |
| 70.0 | 165 | 186 | 191 | 170 | 157 | |
| 100.0 | 161 | 182 | 188 | 166 | 152 | |
| 120.0 | 160 | 181 | 189 | 166 | 151 | |
| 150.0 | 154 | 174 | 183 | 160 | 151 | |
| 200.0 | 145 | 163 | 175 | 154 | 143 | |
| 250.0 | 134 | 151 | 166 | 147 | 134 | |
| 300.0 | 122 | 137 | 156 | 139 | 124 | |

| If frequency (kHz) | Output voltage attenuate quantity (dB) | | | | | Remarks |
|--------------------|--|--------|--------|--------|--------|---------|
| | CH1 | CH2 | CH3 | CH4 | CH5 | |
| 0.1 | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 | |
| 0.2 | -0.011 | -0.003 | -0.022 | -0.011 | -0.016 | |
| 0.5 | -0.054 | -0.054 | -0.054 | -0.058 | -0.052 | |
| 1.0 | -0.029 | -0.029 | -0.028 | -0.038 | -0.029 | |
| 2.0 | -0.034 | -0.033 | -0.031 | -0.044 | -0.039 | |
| 5.0 | -0.005 | 0.031 | 0.009 | -0.026 | -0.029 | |
| 10.0 | 0.003 | 0.170 | 0.111 | -0.008 | -0.071 | |
| 20.0 | 0.030 | 0.541 | 0.457 | 0.107 | -0.153 | |
| 50.0 | 0.002 | 0.995 | 0.960 | 0.189 | -0.422 | |
| 70.0 | -0.026 | 1.040 | 1.067 | 0.180 | -0.505 | |
| 100.0 | -0.229 | 0.853 | 0.954 | -0.037 | -0.793 | |
| 120.0 | -0.287 | 0.822 | 0.986 | -0.021 | -0.838 | |
| 150.0 | -0.621 | 0.456 | 0.702 | -0.340 | -0.833 | |
| 200.0 | -1.155 | -0.090 | 0.327 | -0.693 | -1.333 | |
| 250.0 | -1.805 | -0.768 | -0.111 | -1.106 | -1.876 | |
| 300.0 | -2.623 | -1.593 | -0.667 | -1.594 | -2.548 | |

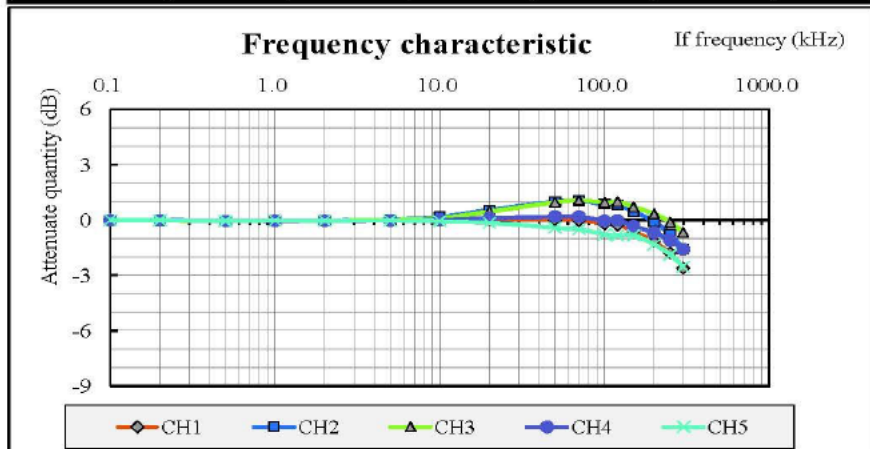

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9