Hall Effect Current Sensors L32P***S05BFS Series

Features:

- Open Loop type
- Printed circuit board mounting
- Unipolar power supply
- Industrial temperature range
- Sulfur-proof as standard
- Bus bar version available for 50A & 100A models
- Insulated plastic case according to UL94V0

Advantage:

- Excellent accuracy and linearity
- Wide nominal current range
- Low temperature drift
- Wide frequency bandwidth
- No insertion loss
- High Immunity To External Interference
- Optimised response time
- Current overload capability

Specifications

T_A=25ºC, V_{CC}=+5V, R_L=10kΩ

Parameters	Symbol	L32P050S05BFS	L32P100S05BFS	L32P150S05BFS	L32P200S05BFS	L32P300S05BFS	L32P400S05BFS
Rated current	I_f	50A	100A	150A	200A	300A	400A
Maximum Current	I_{fmax}	±150A	±300A	±450A	±600A	≥±600AT	≥±600AT
Primary conductor		Aperture or Bus Bar		Aperture			
Output Voltage	V_{OUT}	V_{REF} +0.625V ± 0.015V @ ± I_f					
Offset Voltage	V_{OE}	V_{REF} ± 0.025V @ I_f = 0A					
Reference voltage	V_{REF}	+2.5V ± 0.020V					
Output Linearity[1]	ε_L	≤ ± 0.5% @ 0A, 0.5 I_f, I_f					
Power Supply	V_{CC}	+ 5V ±5 %					
Current Consumption	I_C	≤ 15mA					
Response Time[2]	t_r	≤ 5µs (@ di/dt = F.S. / µs)					
Output Temperature Characteristic[1]	TCV_{OUT}	≤ ± 1.5mV/ºC					
Offset Temperature Characteristic	TCV_{OE}	≤ ± 1.0 mV/ºC @ I_f = 0A		≤ ± 0.5 mV/ºC @ I_f = 0A		≤ ± 0.3 mV/ºC @ I_f = 0A	
Reference Temperature Characteristic	TCV_{REF}	≤ ± 0.012% / ºC					
Hysteresis error	V_{OH}	≤ 7.5mV (0A ⇔ I_f)		≤ 5.0mV (0A ⇔ I_f)		≤ 2.5mV (0A ⇔ I_f)	
Withstand Voltage	V_d	AC2500V for 1minute (sensing current 0.5mA), inside of aperture ⇔ terminal					
Insulation Resistance	R_{IS}	> 500MΩ (500V DC), inside of aperture ⇔ terminal					
Frequency Bandwidth[3]	f	DC .. 50kHz					
Operating Temperature	T_A	-40ºC~+85ºC					
Storage Temperature	T_S	-40ºC~+85ºC					

[1] Without offset — [2] Time between 10% input current full scale and 90% of sensor output full scale — [3] Small signal only to avoid excessive heating of magnetic core

Electrical Performances

Frequency Characteristic data not yet available

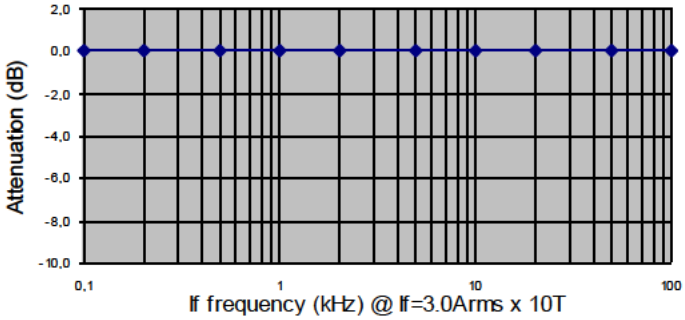

Saturation Characteristic data not yet available

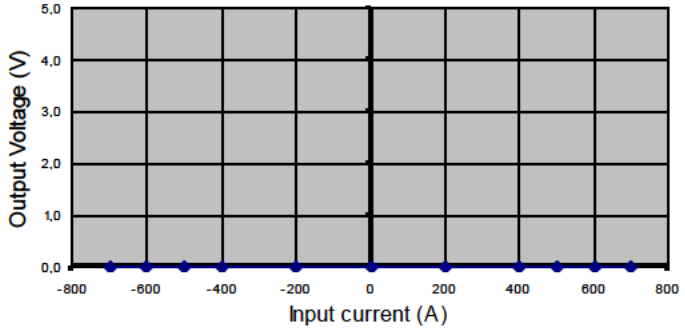

Tamura reserve the right to modify its products in order to improve them without prior notice

Hall Effect Current Sensors L32P***S05BFS Series

Mechanical dimensions in mm

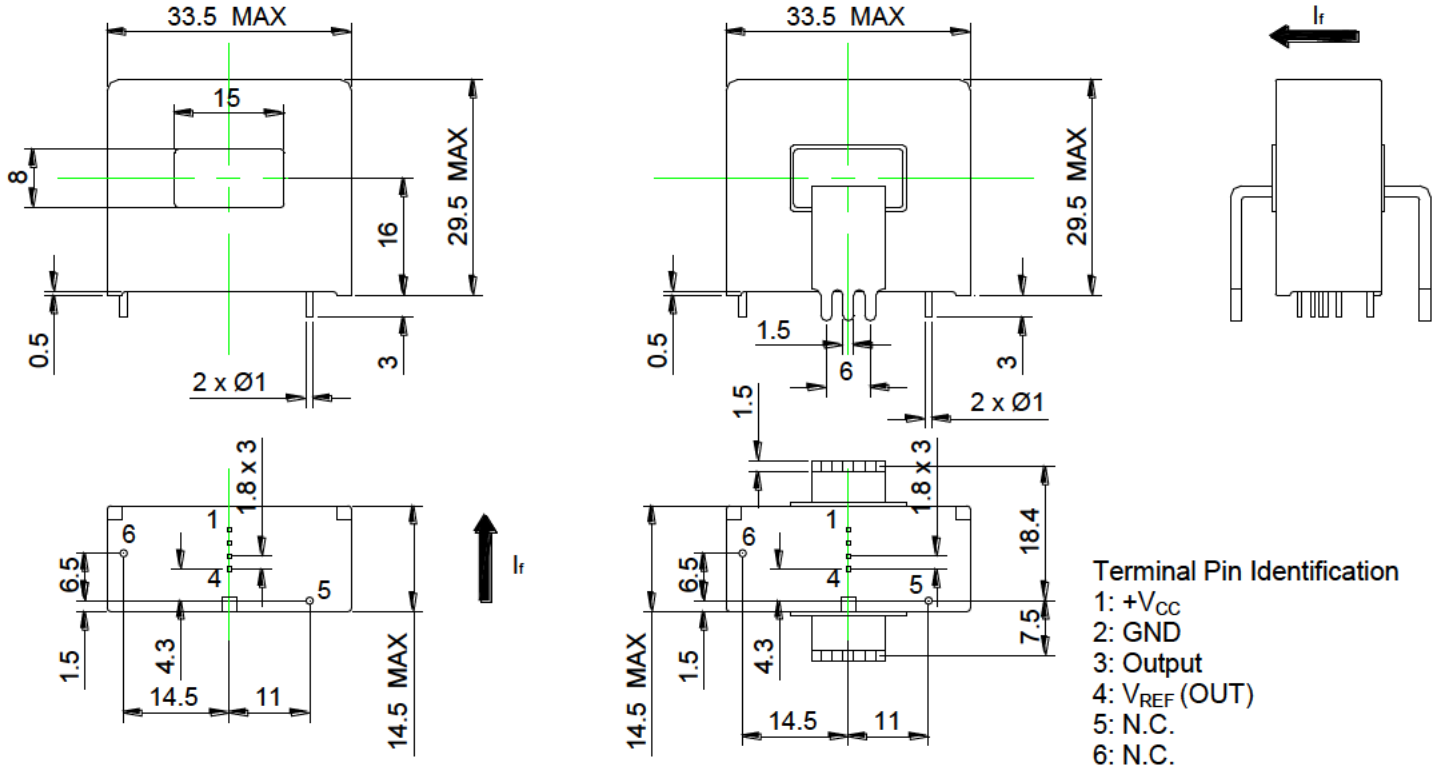

Terminal Pin Identification
1: $+V_{CC}$
2: GND
3: Output
4: V_{REF} (OUT)
5: N.C.
6: N.C.

Electrical connection diagram

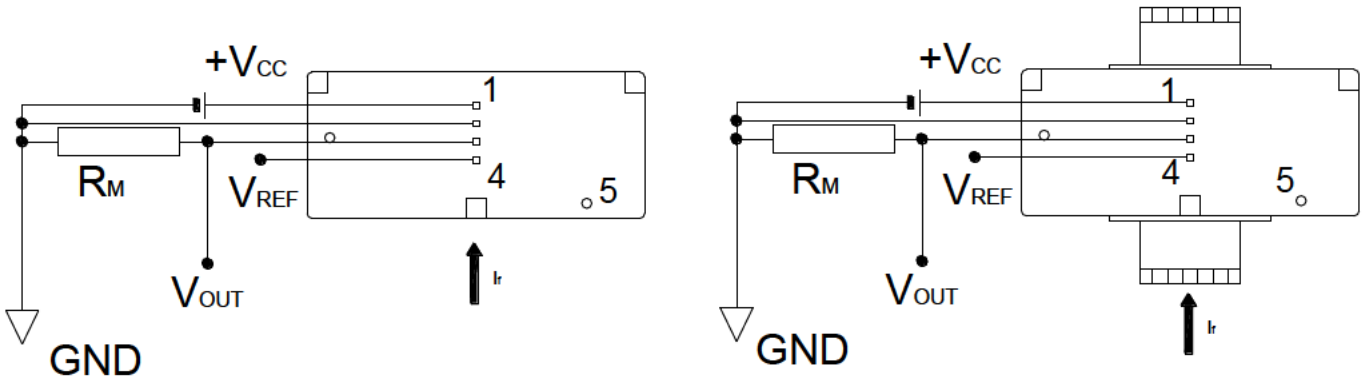

Package & Weight Information

Weight	Pcs/box	Pcs/carton	Pcs/pallet

Tamura reserve the right to modify its products in order to improve them without prior notice

Saturation Characteristics

L32P050S05(B)FS P.3

Saturation characteristic

at Vcc=+5V, RL=10kΩ, Ta=+25°C

Input current (A)	Output voltage (V)					Theoretical value (V)
	No.1	No.2	No.3	No.4	No.5	
210.0	4.981	4.981	4.981	4.981	4.981	5.000
200.0	4.980	4.981	4.980	4.980	4.980	4.995
197.5	4.975	4.975	4.971	4.978	4.976	4.964
195.0	4.945	4.945	4.940	4.947	4.945	4.933
190.0	4.882	4.882	4.877	4.884	4.882	4.870
185.0	4.819	4.819	4.814	4.821	4.819	4.808
175.0	4.693	4.693	4.689	4.695	4.693	4.683
150.0	4.378	4.378	4.374	4.380	4.378	4.370
100.0	3.749	3.750	3.746	3.749	3.748	3.745
50.0	3.120	3.122	3.120	3.119	3.120	3.120
25.0	2.807	2.809	2.807	2.805	2.807	2.808
0.0	2.495	2.499	2.498	2.494	2.495	2.495
-25.0	2.190	2.194	2.195	2.188	2.189	2.183
-50.0	1.874	1.878	1.880	1.871	1.873	1.870
-100.0	1.243	1.248	1.251	1.239	1.242	1.245
-150.0	0.612	0.617	0.621	0.606	0.610	0.620
-175.0	0.296	0.301	0.306	0.290	0.295	0.308
-185.0	0.169	0.175	0.180	0.163	0.168	0.183
-190.0	0.106	0.112	0.117	0.100	0.105	0.120
-195.0	0.043	0.049	0.054	0.037	0.042	0.058
-197.5	0.013	0.018	0.022	0.008	0.011	0.026
-200.0	0.008	0.008	0.008	0.008	0.008	0.000
-210.0	0.008	0.008	0.008	0.008	0.008	0.000

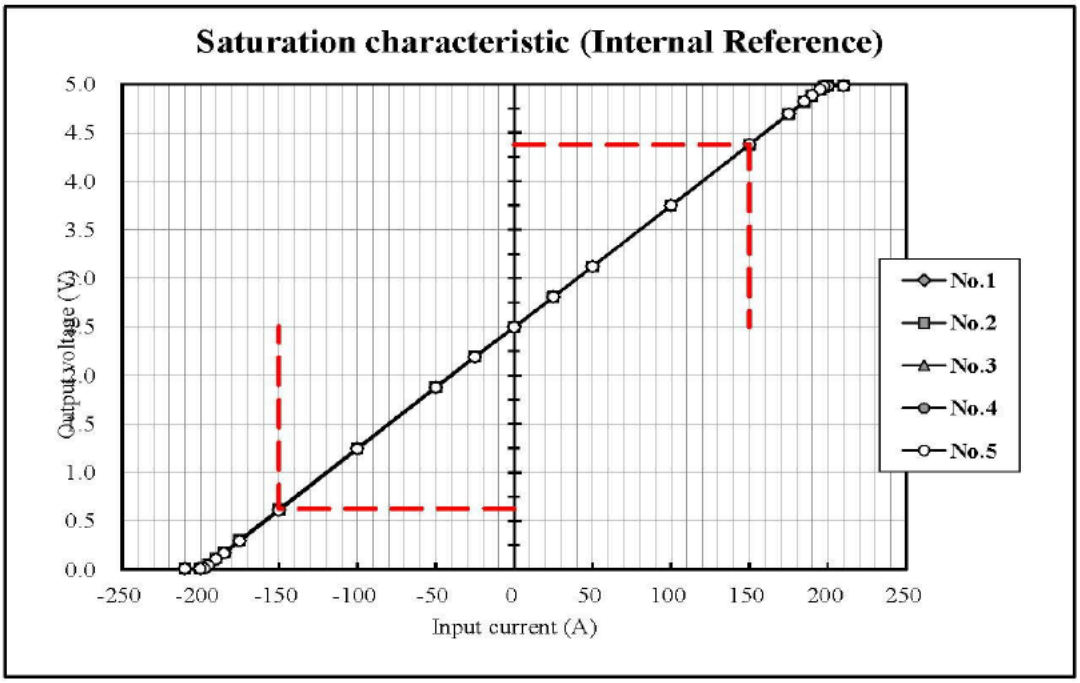

Tamura reserve the right to modify its products in order to improve them without prior notice

Frequency Characteristics

L32P150S05FS P.4

Frequency characteristic (Reference)

at Detected current If= 3.2*12AT, Vcc=+5V, RL=10kΩ, Ta=+25°C

If frequency (kHz)	Output voltage - Offset voltage (mVrms)					Remarks
	CH1	CH2	CH3	CH4	CH5	
0.1	165	165	168	166	166	
0.2	165	165	168	166	166	
0.5	164	164	167	165	165	
1.0	165	164	168	166	166	
2.0	165	164	168	166	165	
5.0	165	166	169	166	166	
10.0	165	168	171	166	165	
20.0	166	176	178	168	163	
50.0	165	185	188	170	158	
70.0	165	186	191	170	157	
100.0	161	182	188	166	152	
120.0	160	181	189	166	151	
150.0	154	174	183	160	151	
200.0	145	163	175	154	143	
250.0	134	151	166	147	134	
300.0	122	137	156	139	124	

If frequency (kHz)	Output voltage attenuate quantity (dB)					Remarks
	CH1	CH2	CH3	CH4	CH5	
0.1	0.000	0.000	0.000	0.000	0.000	
0.2	-0.011	-0.003	-0.022	-0.011	-0.016	
0.5	-0.054	-0.054	-0.054	-0.058	-0.052	
1.0	-0.029	-0.029	-0.028	-0.038	-0.029	
2.0	-0.034	-0.033	-0.031	-0.044	-0.039	
5.0	-0.005	0.031	0.009	-0.026	-0.029	
10.0	0.003	0.170	0.111	-0.008	-0.071	
20.0	0.030	0.541	0.457	0.107	-0.153	
50.0	0.002	0.995	0.960	0.189	-0.422	
70.0	-0.026	1.040	1.067	0.180	-0.505	
100.0	-0.229	0.853	0.954	-0.037	-0.793	
120.0	-0.287	0.822	0.986	-0.021	-0.838	
150.0	-0.621	0.456	0.702	-0.340	-0.833	
200.0	-1.155	-0.090	0.327	-0.693	-1.333	
250.0	-1.805	-0.768	-0.111	-1.106	-1.876	
300.0	-2.623	-1.593	-0.667	-1.594	-2.548	

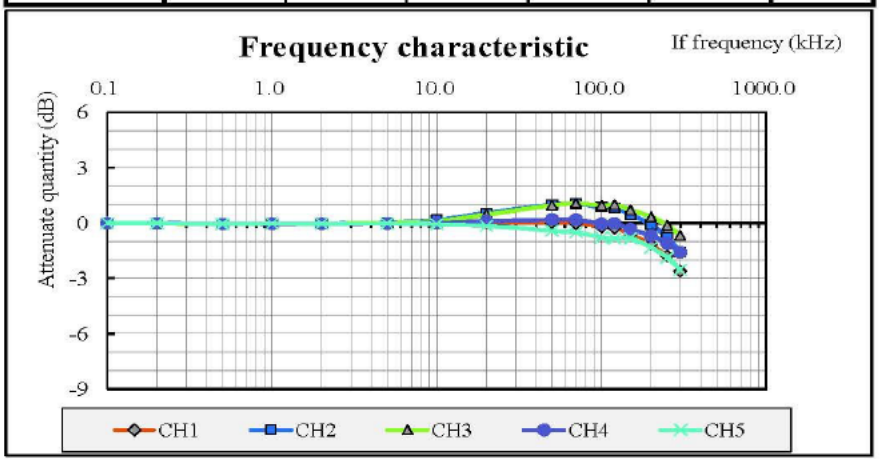

Tamura reserve the right to modify its products in order to improve them without prior notice

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9