

# TAJ Series




## Low Profile



- General purpose SMT chip tantalum series
- CV range: 0.10-1000µF / 2.5-50V
- 10 case sizes in low profile option available



### CASE DIMENSIONS: millimeters (inches)

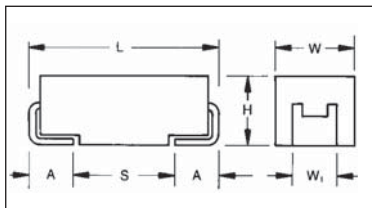

For part marking see page 130

Code	EIA Code	EIA Metric	L±0.20 (0.008)	W+0.20 (0.008) -0.10 (0.004)	H Max.	W <sub>1</sub> ±0.20 (0.008)	A+0.30 (0.012) -0.20 (0.008)	S Min.
F	2312	6032-20	6.00 (0.236)	3.20 (0.126)	2.00 (0.079)	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
H	1210	3528-15	3.50 (0.138)	2.80 (0.110)	1.50 (0.059)	2.20 (0.087)	0.80 (0.031)	1.40 (0.055)
K	1206	3216-10	3.20 (0.126)	1.60 (0.063)	1.00 (0.039)	1.20 (0.047)	0.80 (0.031)	0.40 (0.016)
P	0805	2012-15	2.05 (0.081)	1.35 (0.053)	1.50 (0.059)	1.00±0.10 (0.039±0.004)	0.50 (0.020)	0.85 (0.033)
R	0805	2012-12	2.05 (0.081)	1.30 (0.051)	1.20 (0.047)	1.00±0.10 (0.039±0.004)	0.50 (0.020)	0.85 (0.033)
S	1206	3216-12	3.20 (0.126)	1.60 (0.063)	1.20 (0.047)	1.20 (0.047)	0.80 (0.031)	1.10 (0.043)
T	1210	3528-12	3.50 (0.138)	2.80 (0.110)	1.20 (0.047)	2.20 (0.087)	0.80 (0.031)	1.40 (0.055)
W	2312	6032-15	6.00 (0.236)	3.20 (0.126)	1.50 (0.059)	2.20 (0.087)	1.30 (0.051)	2.90 (0.114)
X	2917	7343-15	7.30 (0.287)	4.30 (0.169)	1.50 (0.059)	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)
Y	2917	7343-20	7.30 (0.287)	4.30 (0.169)	2.00 (0.079)	2.40 (0.094)	1.30 (0.051)	4.40 (0.173)

W<sub>1</sub> dimension applies to the termination width for A dimensional area only.

### HOW TO ORDER

<b>TAJ</b>	<b>C</b>	<b>107</b>	<b>M</b>	<b>010</b>	<b>R</b>	<b>NJ</b>	<b>-</b>
Type	Case Size See table above	Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow)	Tolerance K=±10% M=±20%	Rated DC Voltage 002=2.5Vdc 004=4Vdc 006=6.3Vdc 010=10Vdc 016=16Vdc 020=20Vdc 025=25Vdc 035=35Vdc 050=50Vdc	Packaging R = Pure Tin 7" Reel S = Pure Tin 13" Reel A = Gold Plating 7" Reel B = Gold Plating 13" Reel	Specification Suffix NJ = Standard Suffix	Additional characters may be added for special requirements V = Dry pack Option (selected codes only)

### TECHNICAL SPECIFICATIONS

Technical Data:	All technical data relate to an ambient temperature of +25°C									
Capacitance Range:	0.10 µF to 1000 µF									
Capacitance Tolerance:	±10%; ±20%									
Rated Voltage (V <sub>R</sub> )	≤ +85°C:	2.5	4	6.3	10	16	20	25	35	50
Category Voltage (V <sub>C</sub> )	≤ +125°C:	1.7	2.7	4	7	10	13	17	23	33
Surge Voltage (V <sub>S</sub> )	≤ +85°C:	3.3	5.2	8	13	20	26	32	46	65
Surge Voltage (V <sub>S</sub> )	≤ +125°C:	2.2	3.4	5	8	13	16	20	28	40
Temperature Range:	-55°C to +125°C									
Reliability:	1% per 1000 hours at 85°C, V <sub>R</sub> with 0.1Ω/V series impedance, 60% confidence level									
Termination Finished:	Sn Plating (standard), Gold and SnPb Plating upon request									



### CAPACITANCE AND VOLTAGE RANGE, VR (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated voltage DC (V <sub>R</sub> ) to 85°C								
µF	Code	2.5V (e)	4V (G)	6.3V (J)	10V (A)	16V (C)	20V (D)	25V (E)	35V (V)	50V (T)
0.10	104						R/S		R/S	S
0.15	154						R/S	R	R/S	S
0.22	224						R/S	R	R/S	P/R/S
0.33	334						R/S	R	R/S	P/R <sup>(M)</sup> /S/T
0.47	474						R/S	R/S	R/S/T	S/T
0.68	684					R/S	R/S/T	R/S	P/S/T	
1.0	105				R/S	R/S/T	R/S/T	P/R/S	P/S/T	W
1.5	155			R/S	R/S	R/S	P/R/S/T	P/S/T	T	W
2.2	225		R/S	R/S	R/S	R/S/T	P/R/S/T	T	T	
3.3	335		R/S	R/S	R/S/T	R/S/T	T	T/W	W	Y
4.7	475	R	R/S	R/S/T	R/S/T	K/P/S/T	T	T/W	W	Y
6.8	685	R	R/S/T	R/S/T	P/R/S/T	S/T	T	W	Y	Y
10	106	R/S	R/S/T	P/R/S/T	K/P/R <sup>(M)</sup> /S/T	T/W	W	W	X/Y	
15	156	R	R/S/T	K/P/R/S/T	S/T/W	T <sup>(M)</sup> /W	W	Y	Y	
22	226	P/R	K/P/R/S/T	K/P <sup>(M)</sup> /S/T/W	T/W	W	W/Y	Y	Y	
33	336	K/P/S	K/P <sup>(M)</sup> /S/T/W	T/W	W	W/Y	X/Y	Y		
47	476	P <sup>(M)</sup> /S	T/W	T/W	H/W/Y	W/X/Y	X/Y	Y		
68	686	T	T/W	W	W/Y	F/X/Y	Y			
100	107	T/W	T <sup>(M)</sup> /W	W/Y	W/X/Y	F <sup>(M)</sup> /Y				
150	157	T <sup>(M)</sup> /W	W/Y	W/X/Y	F/X <sup>(M)</sup> /Y	Y <sup>(M)</sup>				
220	227	W/Y	W/X/Y	F/X/Y	Y					
330	337	W <sup>(M)</sup> /Y	F/X/Y	Y						
470	477	F/Y	Y	Y						
680	687	Y	Y <sup>(M)</sup>							
1000	108	Y <sup>(M)</sup>								

Released codes <sup>(M tolerance only)</sup>

Engineering samples - please contact manufacturer

\*Codes under development - subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

# TAJ Series

## Low Profile



### RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz	MSL
<b>2.5 Volt @ 85°C (1.7 Volt @ 125°C)</b>							
TAJR475*002#NJ	R	4.7	2.5	0.5	6	20	1
TAJR685*002#NJ	R	6.8	2.5	0.5	6	20	1
TAJR106*002#NJ	R	10	2.5	0.5	8	4.5	1
TAJS106*002#NJ	S	10	2.5	0.5	6	8	1
TAJR156*002#NJ	R	15	2.5	0.5	8	4.1	1
TAJP226*002#NJ	P	22	2.5	0.5	8	3.5	1
TAJR226*002#NJ	R	22	2.5	0.5	8	3.8	1
TAJK336*002#NJ	K	33	2.5	0.8	8	1.7	1
TAJP336*002#NJ	P	33	2.5	0.7	8	3.5	1
TAJS336*002#NJ	S	33	2.5	0.7	8	1.5	1
TAJP476M002#NJ	P	47	2.5	1.2	12	3.2	1
TAJS476*002#NJ	S	47	2.5	1.2	8	1.6	1
TAJT686*002#NJ	T	68	2.5	1.4	8	1.5	1
TAJT107*002#NJ	T	100	2.5	2.5	15	1.3	1
TAJW107*002#NJ	W	100	2.5	2.5	8	0.4	1
TAJT157M002#NJ	T	150	2.5	3.8	18	1.2	1
TAJW157*002#NJ	W	150	2.5	3.8	8	0.3	1
TAJW227*002#NJ	W	220	2.5	5.5	8	0.3	1
TAJY227*002#NJ	Y	220	2.5	5.5	8	0.3	1 <sup>1)</sup>
TAJW337M002#NJ	W	330	2.5	8.2	12	0.3	1
TAJY337*002#NJ	Y	330	2.5	8.2	8	0.3	1 <sup>1)</sup>
TAJF477*002#NJ	F	470	2.5	11.8	12	0.3	1
TAJY477*002#NJ	Y	470	2.5	11	12	0.2	1 <sup>1)</sup>
TAJY687*002#NJ	Y	680	2.5	17	12	0.2	1 <sup>1)</sup>
TAJY108M002#NJ	Y	1000	2.5	25	30	0.2	1 <sup>1)</sup>
<b>4 Volt @ 85°C (2.7 Volt @ 125°C)</b>							
TAJR225*004#NJ	R	2.2	4	0.5	6	25	1
TAJS225*004#NJ	S	2.2	4	0.5	6	25	1
TAJR335*004#NJ	R	3.3	4	0.5	6	20	1
TAJS335*004#NJ	S	3.3	4	0.5	6	18	1
TAJR475*004#NJ	R	4.7	4	0.5	6	12	1
TAJS475*004#NJ	S	4.7	4	0.5	6	10	1
TAJR685*004#NJ	R	6.8	4	0.5	6	5.2	1
TAJS685*004#NJ	S	6.8	4	0.5	6	8	1
TAJT685*004#NJ	T	6.8	4	0.5	6	6	1
TAJR106*004#NJ	R	10	4	0.5	6	7	1
TAJS106*004#NJ	S	10	4	0.5	6	6	1
TAJT106*004#NJ	T	10	4	0.6	6	5	1
TAJR156*004#NJ	R	15	4	0.6	8	4	1
TAJS156*004#NJ	S	15	4	0.6	8	4	1
TAJT156*004#NJ	T	15	4	0.6	6	2	1
TAJK226*004#NJ	K	22	4	0.9	8	1.8	1
TAJP226*004#NJ	P	22	4	0.9	8	5	1
TAJR226*004#NJ	R	22	4	0.9	8	3.8	1
TAJS226*004#NJ	S	22	4	0.9	8	3.5	1
TAJT226*004#NJ	T	22	4	0.9	6	1.9	1
TAJK336*004#NJ	K	33	4	1.3	10	1.7	1
TAJP336M004#NJ	P	33	4	1.3	8	3.4	1
TAJS336*004#NJ	S	33	4	1.3	8	1.7	1
TAJT336*004#NJ	T	33	4	1.3	6	1.7	1
TAJW336*004#NJ	W	33	4	1.3	6	0.6	1
TAJT476*004#NJ	T	47	4	1.9	10	2	1
TAJW476*004#NJ	W	47	4	1.9	6	0.5	1
TAJT686*004#NJ	T	68	4	2.7	15	1.5	1
TAJW686*004#NJ	W	68	4	2.7	6	0.4	1
TAJT107M004#NJ	T	100	4	4	14	1.4	1
TAJW107*004#NJ	W	100	4	4	6	1.3	1
TAJW157*004#NJ	W	150	4	6	6	1.3	1
TAJY157*004#NJ	Y	150	4	6	6	0.4	1 <sup>1)</sup>
TAJW227*004#NJ	W	220	4	8.8	8	1.2	1
TAJX227*004#NJ	X	220	4	8.8	8	0.9	1 <sup>1)</sup>
TAJY227*004#NJ	Y	220	4	8.8	8	0.3	1 <sup>1)</sup>
TAJF337*004#NJ	F	330	4	13.2	10	0.3	1
TAJX337*004#NJ	X	330	4	13.2	8	0.3	1 <sup>1)</sup>

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz	MSL
TAJY337*004#NJ	Y	330	4	13.2	12	0.4	1 <sup>1)</sup>
TAJY477*004#NJ	Y	470	4	18.8	14	0.9	1 <sup>1)</sup>
TAJY687M004#NJ	Y	680	4	27.2	25	0.2	1 <sup>1)</sup>
<b>6.3 Volt @ 85°C (4 Volt @ 125°C)</b>							
TAJR155*006#NJ	R	1.5	6.3	0.5	6	2	1
TAJS155*006#NJ	S	1.5	6.3	0.5	6	25	1
TAJR225*006#NJ	R	2.2	6.3	0.5	6	20	1
TAJS225*006#NJ	S	2.2	6.3	0.5	6	18	1
TAJR335*006#NJ	R	3.3	6.3	0.5	6	12	1
TAJS335*006#NJ	S	3.3	6.3	0.5	6	9	1
TAJR475*006#NJ	R	4.7	6.3	0.5	6	7	1
TAJS475*006#NJ	S	4.7	6.3	0.5	6	7.5	1
TAJT475*006#NJ	T	4.7	6.3	0.5	6	6	1
TAJR685*006#NJ	R	6.8	6.3	0.5	8	7	1
TAJS685*006#NJ	S	6.8	6.3	0.5	6	2.6	1
TAJT685*006#NJ	T	6.8	6.3	0.5	6	5	1
TAJP106*006#NJ	P	10	6.3	0.6	8	6	1
TAJR106*006#NJ	R	10	6.3	0.6	8	6	1
TAJS106*006#NJ	S	10	6.3	0.6	8	4	1
TAJT106*006#NJ	T	10	6.3	0.6	6	4	1
TAJK156*006#NJ	K	15	6.3	0.9	6	2	1
TAJP156*006#NJ	P	15	6.3	0.9	8	3.5	1
TAJR156*006#NJ	R	15	6.3	0.9	8	4.1	1
TAJS156*006#NJ	S	15	6.3	0.9	8	4	1
TAJT156*006#NJ	T	15	6.3	0.9	6	3.5	1
TAJK226*006#NJ	K	22	6.3	1.3	10	1.8	1
TAJP226M006#NJ	P	22	6.3	1.3	8	3.8	1
TAJS226*006#NJ	S	22	6.3	1.3	10	1.8	1
TAJT226*006#NJ	T	22	6.3	1.4	8	2.5	1
TAJW226*006#NJ	W	22	6.3	1.3	6	0.6	1
TAJT336*006#NJ	T	33	6.3	2.1	10	2.5	1
TAJW336*006#NJ	W	33	6.3	2.1	6	1.8	1
TAJT476*006#NJ	T	47	6.3	2.8	10	1.6	1
TAJW476*006#NJ	W	47	6.3	3	6	1.5	1
TAJW686*006#NJ	W	68	6.3	4.3	6	1.5	1
TAJW107*006#NJ	W	100	6.3	6.3	6	0.9	1
TAJY107*006#NJ	Y	100	6.3	6.3	6	0.9	1 <sup>1)</sup>
TAJW157*006#NJ	W	150	6.3	9	8	0.3	1
TAJT157*006#NJ	X	150	6.3	9.5	6	0.9	1 <sup>1)</sup>
TAJY157*006#NJ	Y	150	6.3	9	6	0.4	1 <sup>1)</sup>
TAJF227*006#NJ	F	220	6.3	13.2	10	0.3	1
TAJX227*006#NJ	X	220	6.3	13.2	8	0.3	1 <sup>1)</sup>
TAJY227*006#NJ	Y	220	6.3	13.9	10	0.9	1 <sup>1)</sup>
TAJY337*006#NJ	Y	330	6.3	20.8	12	0.4	1 <sup>1)</sup>
TAJY477*006#NJ	Y	470	6.3	28.2	20	0.2	1 <sup>1)</sup>
<b>10 Volt @ 85°C (7 Volt @ 125°C)</b>							
TAJR105*010#NJ	R	1	10	0.5	4	25	1
TAJS105*010#NJ	S	1	10	0.5	4	25	1
TAJR155*010#NJ	R	1.5	10	0.5	6	20	1
TAJS155*010#NJ	S	1.5	10	0.5	6	20	1
TAJR225*010#NJ	R	2.2	10	0.5	6	15	1
TAJS225*010#NJ	S	2.2	10	0.5	6	12	1
TAJR335*010#NJ	R	3.3	10	0.5	6	8	1
TAJS335*010#NJ	S	3.3	10	0.5	6	8	1
TAJT335*010#NJ	T	3.3	10	0.5	6	6	1
TAJR475*010#NJ	R	4.7	10	0.5	6	9	1
TAJS475*010#NJ	S	4.7	10	0.5	6	5	1
TAJT475*010#NJ	T	4.7	10	0.5	6	5	1
TAJP685*010#NJ	P	6.8	10	0.7	6	5	1
TAJR685*010#NJ	R	6.8	10	0.7	6	5.2	1
TAJS685*010#NJ	S	6.8	10	0.7	6	4	1
TAJT685*010#NJ	T	6.8	10	0.7	6	4	1
TAJK106*010#NJ	K	10	10	1	6	2.2	1
TAJP106*010#NJ	P	10	10	1	8	6	1
TAJR106M010#NJ	R	10	10	1	20	6	1

<sup>1)</sup> Dry pack option (see How to order) recommended for reduction of stress during soldering. Dry pack parts should be treated as MSL 3.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 123.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**

# TAJ Series



## Low Profile

### RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz	MSL
TAJS106*010#NJ	S	10	10	1	8	4	1
TAJT106*010#NJ	T	10	10	1	6	3	1
TAJS156*010#NJ	S	15	10	1.5	6	2	1
TAJT156*010#NJ	T	15	10	1.5	8	2.8	1
TAJW156*010#NJ	W	15	10	1.5	6	0.7	1
TAJT226*010#NJ	T	22	10	2.2	8	2.2	1
TAJW226*010#NJ	W	22	10	2.2	6	0.6	1
TAJW336*010#NJ	W	33	10	3.3	6	1.6	1
TAJH476*006#NJ	H	47	10	4.7	8	1.0	1
TAJW476*010#NJ	W	47	10	4.7	6	1.4	1
TAJY476*010#NJ	Y	47	10	4.7	6	0.5	1 <sup>1)</sup>
TAJW686*010#NJ	W	68	10	6.8	6	1.3	1
TAJY686*010#NJ	Y	68	10	6.8	6	0.9	1 <sup>1)</sup>
TAJW107*010#NJ	W	100	10	10	6	0.4	1
TAJX107*010#NJ	X	100	10	10	8	0.9	1 <sup>1)</sup>
TAJY107*010#NJ	Y	100	10	10	6	0.9	1 <sup>1)</sup>
TAJF157*010#NJ	F	150	10	15	10	0.3	1
TAJX157M010#NJ	X	150	10	15	6	0.3	1 <sup>1)</sup>
TAJY157*010#NJ	Y	150	10	15	6	1.2	1 <sup>1)</sup>
TAJY227*010#NJ	Y	220	10	22	10	0.5	1 <sup>1)</sup>
<b>16 Volt @ 85°C (10 Volt @ 125°C)</b>							
TAJR684*016#NJ	R	0.68	16	0.5	4	25	1
TAJS684*016#NJ	S	0.68	16	0.5	4	25	1
TAJR105*016#NJ	R	1	16	0.5	4	20	1
TAJS105*016#NJ	S	1	16	0.5	4	15	1
TAJT105*016#NJ	T	1	16	0.5	4	5	1
TAJR155*016#NJ	R	1.5	16	0.5	6	10	1
TAJS155*016#NJ	S	1.5	16	0.5	6	12	1
TAJR225*016#NJ	R	2.2	16	0.5	6	6.5	1
TAJS225*016#NJ	S	2.2	16	0.5	6	6	1
TAJT225*016#NJ	T	2.2	16	0.5	6	6.5	1
TAJR335*016#NJ	R	3.3	16	0.5	8	5	1
TAJS335*016#NJ	S	3.3	16	0.5	6	5	1
TAJT335*016#NJ	T	3.3	16	0.5	6	5	1
TAJK475*016#NJ	K	4.7	16	0.8	6	3.1	1
TAJP475*016#NJ	P	4.7	16	0.8	8	5	1
TAJS475*016#NJ	S	4.7	16	0.8	8	4.5	1
TAJT475*016#NJ	T	4.7	16	0.8	6	3.1	1
TAJS685*016#NJ	S	6.8	16	1.1	8	2.4	1
TAJT685*016#NJ	T	6.8	16	1.1	6	3.5	1
TAJT106*016#NJ	T	10	16	1.6	8	2.2	1
TAJW106*016#NJ	W	10	16	1.6	6	2	1
TAJT156M016#NJ	T	15	16	2.4	6	2	1
TAJW156*016#NJ	W	15	16	2.4	6	0.7	1
TAJW226*016#NJ	W	22	16	3.5	6	1.6	1
TAJW336*016#NJ	W	33	16	5.3	6	1.5	1
TAJY336*016#NJ	Y	33	16	5.3	6	0.9	1 <sup>1)</sup>
TAJW476*016#NJ	W	47	16	7.5	6	0.4	1
TAJX476*016#NJ	X	47	16	7.5	6	0.9	1 <sup>1)</sup>
TAJY476*016#NJ	Y	47	16	7.5	6	0.7	1 <sup>1)</sup>
TAJF686*016#NJ	F	68	16	10.9	10	0.4	1
TAJX686*016#NJ	X	68	16	10.9	8	0.6	1 <sup>1)</sup>
TAJY686*016#NJ	Y	68	16	10.9	6	0.9	1 <sup>1)</sup>
TAJF107M016#NJ	F	100	16	16	10	0.4	1
TAJY107*016#NJ	Y	100	16	16	8	0.9	1 <sup>1)</sup>
TAJY157M016#NJ	Y	150	16	24	15	0.3	1 <sup>1)</sup>
<b>20 Volt @ 85°C (13 Volt @ 125°C)</b>							
TAJR104*020#NJ	R	0.1	20	0.5	4	25	1
TAJS104*020#NJ	S	0.1	20	0.5	4	25	1
TAJR154*020#NJ	R	0.15	20	0.5	4	25	1
TAJS154*020#NJ	S	0.15	20	0.5	4	25	1
TAJR224*020#NJ	R	0.22	20	0.5	4	25	1
TAJS224*020#NJ	S	0.22	20	0.5	4	25	1
TAJR334*020#NJ	R	0.33	20	0.5	4	25	1
TAJS334*020#NJ	S	0.33	20	0.5	4	25	1

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz	MSL
TAJR474*020#NJ	R	0.47	20	0.5	4	25	1
TAJS474*020#NJ	S	0.47	20	0.5	4	25	1
TAJR684*020#NJ	R	0.68	20	0.5	4	20	1
TAJS684*020#NJ	S	0.68	20	0.5	4	25	1
TAJT684*020#NJ	T	0.68	20	0.5	4	15	1
TAJR105*020#NJ	R	1	20	0.5	4	20	1
TAJS105*020#NJ	S	1	20	0.5	4	12	1
TAJT105*020#NJ	T	1	20	0.5	4	9	1
TAJP155*020#NJ	P	1.5	20	0.5	6	9.6	1
TAJR155*020#NJ	R	1.5	20	0.5	6	9.6	1
TAJS155*020#NJ	S	1.5	20	0.5	6	5.4	1
TAJT155*020#NJ	T	1.5	20	0.5	6	6.5	1
TAJP225*020#NJ	P	2.2	20	0.5	6	8.3	1
TAJR225*020#NJ	R	2.2	20	0.5	6	6	1
TAJS225*020#NJ	S	2.2	20	0.5	6	4.5	1
TAJT225*020#NJ	T	2.2	20	0.5	6	6	1
TAJT335*020#NJ	T	3.3	20	0.7	6	3	1
TAJT475*020#NJ	T	4.7	20	0.9	6	3.1	1
TAJT685*020#NJ	T	6.8	20	1.4	6	2.6	1
TAJW106*020#NJ	W	10	20	2	6	1.9	1
TAJW156*020#NJ	W	15	20	3	6	1.7	1
TAJW226*020#NJ	W	22	20	4.4	6	1.6	1
TAJY226*020#NJ	Y	22	20	4.4	6	0.9	1 <sup>1)</sup>
TAJX336*020#NJ	X	33	20	6.6	6	0.5	1 <sup>1)</sup>
TAJY336*020#NJ	Y	33	20	6.6	6	0.6	1 <sup>1)</sup>
TAJX476*020#NJ	X	47	20	9.4	6	0.4	1 <sup>1)</sup>
TAJY476*020#NJ	Y	47	20	9.4	6	0.9	1 <sup>1)</sup>
TAJY686*020#NJ	Y	68	20	13.6	6	0.9	1 <sup>1)</sup>
<b>25 Volt @ 85°C (17 Volt @ 125°C)</b>							
TAJR154*025#NJ	R	0.15	25	0.5	4	24	1
TAJR224*025#NJ	R	0.22	25	0.5	4	21	1
TAJR334*025#NJ	R	0.33	25	0.5	4	17	1
TAJR474*025#NJ	R	0.47	25	0.5	4	15	1
TAJS474*025#NJ	S	0.47	25	0.5	4	14	1
TAJR684*025#NJ	R	0.68	25	0.5	4	13	1
TAJS684*025#NJ	S	0.68	25	0.5	4	10	1
TAJP105*025#NJ	P	1	25	0.5	4	11	1
TAJR105*025#NJ	R	1	25	0.5	4	8	1
TAJS105*025#NJ	S	1	25	0.5	4	8	1
TAJP155*025#NJ	P	1.5	25	0.5	6	9.6	1
TAJS155*025#NJ	S	1.5	25	0.5	6	5.4	1
TAJT155*025#NJ	T	1.5	25	0.5	6	5	1
TAJT225*025#NJ	T	2.2	25	0.6	6	4.5	1
TAJT335*025#NJ	T	3.3	25	0.8	6	3.5	1
TAJW335*025#NJ	W	3.3	25	0.8	6	1.6	1
TAJT475*025#NJ	T	4.7	25	1.2	6	3.1	1
TAJW475*025#NJ	W	4.7	25	1.2	6	1.2	1
TAJW685*025#NJ	W	6.8	25	1.7	6	2	1
TAJW106*025#NJ	W	10	25	2.5	6	1.8	1
TAJY156*025#NJ	Y	15	25	3.8	6	1	1 <sup>1)</sup>
TAJY226*025#NJ	Y	22	25	5.5	6	0.9	1 <sup>1)</sup>
TAJY336*025#NJ	Y	33	25	8.3	6	0.5	1 <sup>1)</sup>
TAJY476*025#NJ	Y	47	25	11.8	6	0.9	1 <sup>1)</sup>
<b>35 Volt @ 85°C (23 Volt @ 125°C)</b>							
TAJR104*035#NJ	R	0.1	35	0.5	4	29	1
TAJS104*035#NJ	S	0.1	35	0.5	4	24	1
TAJR154*035#NJ	R	0.15	35	0.5	4	24	1
TAJS154*035#NJ	S	0.15	35	0.5	4	21	1
TAJR224*035#NJ	R	0.22	35	0.5	4	21	1
TAJS224*035#NJ	S	0.22	35	0.5	4	18	1
TAJR334*035#NJ	R	0.33	35	0.5	4	17	1
TAJS334*035#NJ	S	0.33	35	0.5	4	15	1
TAJR474*035#NJ	R	0.47	35	0.5	4	15	1
TAJS474*035#NJ	S	0.47	35	0.5	4	12	1
TAJT474*035#NJ	T	0.47	35	0.5	4	10	1

<sup>1)</sup> Dry pack option (see How to order) recommended for reduction of stress during soldering. Dry pack parts should be treated as MSL 3.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts.

DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 123.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**



### RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	DCL (µA) Max.	DF % Max.	ESR Max. (Ω) @100kHz	MSL
TAJP684*035#NJ	P	0.68	35	0.5	4	13	1
TAJS684*035#NJ	S	0.68	35	0.5	4	8	1
TAJT684*035#NJ	T	0.68	35	0.5	4	8	1
TAJP105*035#NJ	P	1	35	0.5	4	11	1
TAJS105*035#NJ	S	1	35	0.5	4	7.5	1
TAJT105*035#NJ	T	1	35	5	4	6.5	1
TAJT155*035#NJ	T	1.5	35	0.5	6	5.2	1
TAJT225*035#NJ	T	2.2	35	0.8	6	4.2	1
TAJW335*035#NJ	W	3.3	35	1.2	6	1.6	1
TAJW475*035#NJ	W	4.7	35	1.6	6	2.2	1
TAJY685*035#NJ	Y	6.8	35	2.3	6	0.9	1 <sup>1)</sup>
TAJX106*035#NJ	X	10	35	3.5	6	0.7	1 <sup>1)</sup>
TAJY106*035#NJ	Y	10	35	3.5	6	1	1 <sup>1)</sup>
TAJY156*035#NJ	Y	15	35	5.3	6	0.6	1 <sup>1)</sup>
TAJY226*035#NJ	Y	22	35	7.7	6	0.5	1 <sup>1)</sup>
<b>50 Volt @ 85°C (33 Volt @ 125°C)</b>							
TAJS104*050#NJ	S	0.1	50	0.5	4	19	1
TAJS154*050#NJ	S	0.15	50	0.5	4	16	1
TAJP224*050#NJ	P	0.22	50	0.5	4	17	1
TAJR224*050#NJ	R	0.22	50	0.5	4	17	1
TAJS224*050#NJ	S	0.22	50	0.5	4	13	1
TAJP334*050#NJ	P	0.33	50	0.5	4	17	1
TAJR334M050#NJ	R	0.33	50	0.5	4	17	1
TAJS334*050#NJ	S	0.33	50	0.5	4	11	1
TAJT334*050#NJ	T	0.33	50	0.5	4	11	1
TAJS474*050#NJ	S	0.47	50	0.5	4	9.5	1
TAJT474*050#NJ	T	0.47	50	0.5	4	9.5	1
TAJW105*050#NJ	W	1	50	0.5	6	4.4	1
TAJW155*050#NJ	W	1.5	50	0.8	6	3.1	1
TAJY335*050#NJ	Y	3.3	50	1.7	4	1.7	1 <sup>1)</sup>
TAJY475*050#NJ	Y	4.7	50	2.4	6	1.2	1 <sup>1)</sup>
TAJY685*050#NJ	Y	6.8	50	3.4	6	0.9	1 <sup>1)</sup>

<sup>1)</sup> Dry pack option (see How to order) recommended for reduction of stress during soldering. Dry pack parts should be treated as MSL 3.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 123.

**NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.**

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9