

# HSMF-C125 Tri-Color Surface-Mount ChipLED

# **Description**

The Broadcom<sup>®</sup> HSMF-C125 is a 6-pin tri-color RGB chipLED with a 1.6-mm × 1.6-mm footprint. Its low package height of 0.4 mm makes this product an ideal solution for applications that have head room constraints, such as wearables and handheld portable devices.

Its small form factor with individually addressable pin-out for each color offers great design flexibility to the user. This chipLED offers industry leading light output performance by using efficient and high brightness AllnGaP and InGaN LED materials.

This chipLED is compatible with reflow soldering process. For easy pick-and-place, the parts are packed in tape and reel. Every reel is shipped from a single intensity and color bin for better uniformity control.

#### **Features**


- LED with AllnGaP / InGaN die
- Small form factor with individually addressable pin-out for all three colors
- Compatible with reflow soldering
- Available in 8-mm carrier tape on 7-in. diameter reels

# **Applications**

- Backlighting
- Indicator

**CAUTION!** This LED is Class 1A ESD sensitive per ANSI/ESDA/JEDEC JS-001. Please observe appropriate precautions during handling and processing. Refer to Application Note AN-1142 for additional details.

Figure 1: Package Dimensions

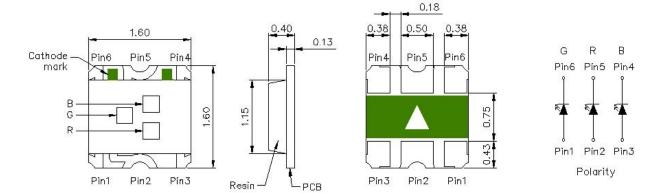

#### NOTE:

- 1. All dimensions are in millimeters.
- 2. Tolerance ±0.1 mm unless otherwise specified.

# Absolute Maximum Value at $T_J = 25$ °C

Parameter	AllnGaP Red	InGaN Green	InGaN Blue	Units
DC Forward Current <sup>a, b</sup>	20	20	10	mA
Power Dissipation <sup>a</sup>	48	78	39	mW
Forward Current <sup>c, d</sup>	15	15	10	mA
Power Dissipation <sup>c</sup>	40	58	39	mW
Junction Temperature		95		
Operating Temperature		-40 to +85		
Storage Temperature		-40 to +85		

- a. Applies when one color is lit up.
- b. Derate as shown in Figure 10
- c. Applies when all three colors are lit up simultaneously.
- d. Derate as shown in Figure 11.

# Optical Characteristics ( $T_J = 25$ °C, $I_F = 10$ mA)

	Luminous Inte	nsity I <sub>V</sub> (mcd) <sup>a</sup>	Dominant Wavelength $\lambda_{\mathbf{d}}^{\mathbf{b}}$ (nm)	Peak Wavelength $\lambda_{\mathbf{p}}$ (nm)	Viewing Angle 2θ <sub>1/2</sub> <sup>c</sup> (Degrees)
Color	Min.	Max.	Тур.	Тур.	Тур.
Red	45.0	180.0	623	630	130
Green	112.5	360.0	522	515	150
Blue	28.5	112.5	467	461	150

- a. The luminous intensity, I<sub>v</sub>, is measured at the mechanical axis of the LED package. The actual peak of the spatial radiation pattern may not be aligned with the axis.
- b. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
- c.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is  $\frac{1}{2}$  the peak intensity.

# Electrical Characteristics at $T_J = 25$ °C, $I_F = 10$ mA)

	Forward Voltage V <sub>F</sub> (Volts) <sup>a</sup>		Reverse Current I <sub>R</sub> <sup>b</sup> (μA) at V <sub>R</sub> = 5V	Thermal Resistance Rθ <sub>J-S</sub> (°C/W)
Color	Min.	Max.	Max.	Тур.
Red	1.90	2.40	100	400
Green	2.93	3.90	100	400
Blue	2.95	3.90	100	400

a. Forward voltage tolerance: ±0.1V.

#### **Bin Information**

## Intensity Bin (CAT)

	Luminous Intensity (mcd)		
Bin ID	Min.	Max.	
N	28.5	45.0	
Р	45.0	71.5	
Q	71.5	112.5	
R	112.5	180.0	
S	180.0	285.0	
Т	285.0	360.0	

Tolerance ±15%.

# Color Bin (BIN) - Red

	Dominant Wavelength (nm)		
Bin ID	Min.	Max.	
AC	615	630	

Tolerance ±1 nm.

## Color Bin (BIN) - Green

	Dominant Wavelength (nm)		
Bin ID	Min.	Max.	
В	520	525	
С	525	530	
D	530	535	
Е	535	540	

Tolerance ±1 nm.

# Color Bin (BIN) - Blue

	Dominant Wavelength (nm)		
Bin ID	Min.	Max.	
AA	460	465	
AB	465	470	
AC	470	475	
AD	475	480	

Tolerance ±1 nm.

#### **CAUTION!**

- The above optical performance specifications are valid in the case when a single color is illuminated.
- The above product specifications *do not* provide any guarantee on color mixing, color consistency over time or uniformity in luminous intensity when more than one color is illuminated.

b. Reverse voltage indicates product final test. Long-term reverse bias is not recommended.

Figure 2: Spectrum




Figure 3: Relative Intensity vs. Forward Current




Figure 4: Forward Current vs. Forward Voltage





Figure 5: Radiation Pattern



HSMF-C125-DS100 Broadcom

Figure 6: Dominant Wavelength Shift vs. Forward Current




Figure 7: Relative Intensity vs. Temperature




Figure 8: Dominant Wavelength Shift vs. Temperature




Figure 9: Forward Voltage Shift vs. Temperature




Figure 10: Derating Curve (Single Chip Lit Up)




Figure 11: Derating Curve (All Chips Lit Up)




Figure 12: Recommended Solder Pad (Units: mm)





Figure 13: Reel Orientation



All dimensions in millimeters (inches).

Figure 14: Reel Dimensions (Units: mm [inches])


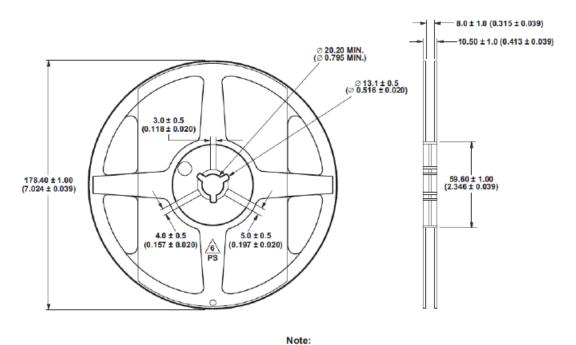


Figure 15: Carrier Tape Dimensions (Units: mm)

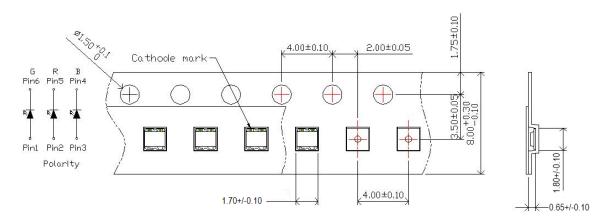


# **Precautionary Notes**

### Soldering

Do not perform reflow soldering more than twice.
 Observe necessary precautions of handling moisture sensitive device as stated in the following section.

- Do not apply any pressure or force on the LED during reflow and after reflow when the LED is still hot.
- Use reflow soldering to solder the LED. If unavoidable (such as rework), use hand soldering strictly controlled to the following conditions:
  - Soldering iron tip temperature = 310°C maximum
  - Soldering duration = 2 seconds maximum
  - Number of cycles = 1 only
  - Power of soldering iron = 50W maximum
- Do not touch the LED package body with the soldering iron except for the soldering terminals because it might cause damage to the LED.
- Confirm beforehand whether the functionality and performance of the LED is affected by hand soldering.

Figure 16: Recommended Lead-Free Reflow Soldering Profile

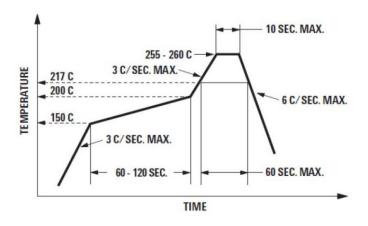

# **Handling of Moisture-Sensitive Devices**

This product has a Moisture Sensitive Level 2a rating per JEDEC J-STD-020. Refer to Broadcom Application Note AN5305, *Handling of Moisture Sensitive Surface Mount Devices*, for additional details and a review of proper handling procedures.

#### Before use:

- An unopened moisture barrier bag (MBB) can be stored at < 40°C/90% RH for 12 months. If the actual shelf life has exceeded 12 months and the humidity indicator card (HIC) indicates that baking is not required, it is safe to reflow the LEDs per the original MSL rating.
- Do not open the MBB prior to assembly (for example, for IQC). If unavoidable, properly reseal the MBB with fresh desiccant and HIC. The exposed duration must be taken in as floor life.

#### Control after opening the MBB:

- Read the HIC immediately upon opening the MBB.
- Keep the LEDs at < 30°C/60% RH at all times, and complete all high-temperature-related processes, including soldering, curing, or rework, within 672 hours.

#### Control for unfinished reel:

Store unused LEDs in a sealed MBB with desiccant or desiccator at < 5% RH.

#### Control of assembled boards:

If the PCB soldered with the LEDs is to be subjected to other high-temperature processes, store the PCB in a sealed MBB with desiccant or desiccator at < 5% RH to ensure that all LEDs have not exceeded their floor life of 672 hours.

#### Baking is required if the following conditions exist:

- The HIC indicator indicates a change in color for 10% and 5% as stated on the HIC.
- The LEDs are exposed to conditions of > 30°C/60%
   RH at any time.
- The LEDs' floor life exceeded 672 hours.

The recommended baking condition is: 60°C ±5°C for 20 hours.

Baking should only be done once.

# **Application Precautions**

- The drive current of the LED must not exceed the maximum allowable limit across temperature as stated in the data sheet. Constant current driving is recommended to ensure consistent performance.
- Circuit design must cater to the whole range of forward voltage (V<sub>F</sub>) of the LEDs to ensure the intended drive current can always be achieved.

 LEDs exhibit slightly different characteristics at different drive currents that might result in larger performance variations (that is, intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.

- The LED is not intended for reverse bias. Use other appropriate components for such purposes. When driving the LED in matrix form, ensure that the reverse bias voltage does not exceed the allowable limit of the LED.
- Avoid rapid change in ambient temperature, especially in high-humidity environments, because this will cause condensation on the LED.
- If the LED is intended to be used in harsh or outdoor environments, protect the LED against damages caused by rain water, water, dust, oil, corrosive gases, external mechanical stress, and so on.

## **Eye Safety and Precautions**

LEDs may pose optical hazards when in operation. Do not look directly at operating LEDs as it may be harmful to the eyes. For safety reasons, use appropriate shielding or personal protection equipment.

#### **Disclaimer**

Broadcom's products are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries and/or the EU.

Copyright © 2016–2017 Broadcom. All Rights Reserved.

The term "Broadcom" refers to Broadcom Limited and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.







## **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9