



Features

- Split knurled or plain shaft options
- DPDT latching-push switch
- Metal bushing and shaft
- Carbon element
- Linear and audio taper options
- RoHS compliant*



PDB185-GTR - 17 mm Guitar Potentiometer w/Latching-Push Switch

Electrical Characteristics

Taper..... Linear, audio
 Standard Resistance Range
 10K ohms to 1M ohms
 Standard Resistance Tolerance..... $\pm 20\%$
 Residual Resistance..... $2\ \Omega$ max.

Environmental Characteristics

Operating Temperature
 $-10\ ^\circ\text{C}$ to $+70\ ^\circ\text{C}$
 Power Rating
 Linear 0.1 watt
 Audio 0.05 watt
 Maximum Operating Voltage
 Linear 150 V
 Audio 100 V
 Sliding Noise..... 47 mV max.

Mechanical Characteristics

Mechanical Angle $300^\circ \pm 5^\circ$
 Rotational Torque 20 to 150 g-cm
 Stop Strength..... 8 kg-cm min.
 Rotational Life..... 15,000 cycles
 Switch Life 10,000 actuations
 Switch Type DPDT
 Switch Travel 4.0 ± 0.8 mm
 Switch Operating Force..... 2 kgf max.
 Soldering Condition
 Wave $260\ ^\circ\text{C}$ max., 5 sec. max.
 Manual $350\ ^\circ\text{C}$ max., 3 sec. max.
 Hardware Two flat washers and
 two mounting nuts supplied per
 potentiometer

How To Order

PDB185 - GTR 11 - 504 A2


- Model _____
 Guitar Pot Designator _____
 Configuration _____
- 02 = Slotted Shaft / Solder Lugs
 - 04 = Slotted Shaft/PC Pins
 - 11 = Knurled Shaft (24 Tooth) / Solder Lugs
 - 13 = Knurled Shaft (24 Tooth) / PC Pins
 - 31 = Knurled Shaft (18 Tooth) / Solder Lugs, Long Bushing
 - 32 = Slotted Shaft / Solder Lugs / Long Bushing

Resistance Code (See table) _____


Resistance Taper (See taper charts) _____

Product Dimensions

PDB185-GTR02

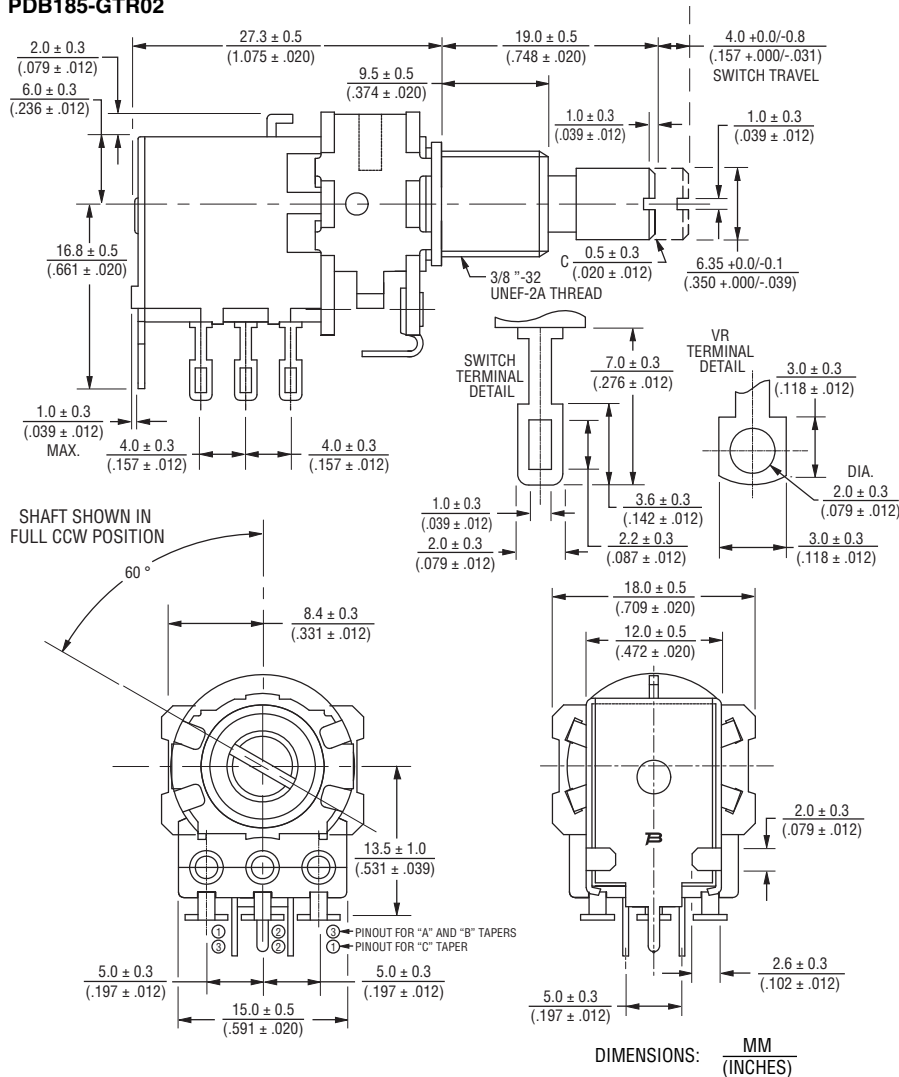

Derating Curve

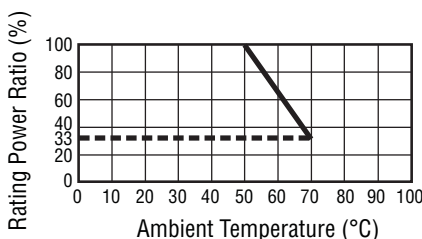

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10,000	103
25,000	253
50,000	503
100,000	104
250,000	254
300,000	304
500,000	504
1,000,000	105

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

PDB185-GTR - 17 mm Guitar Potentiometer w/Latching-Push Switch


BOURNS®

Product Dimensions (Continued)

PDB185-GTR04

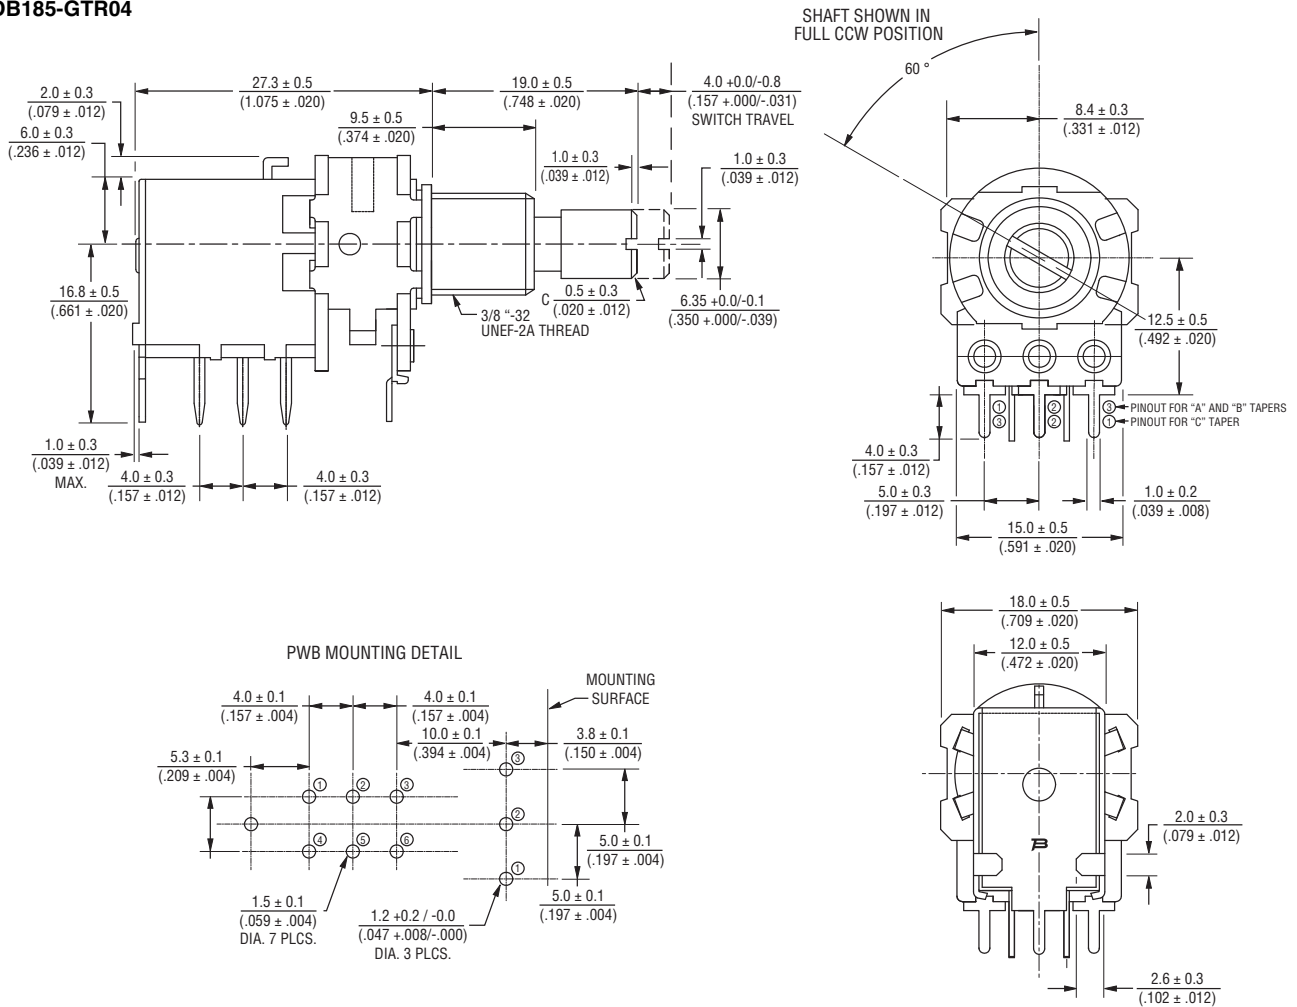



PDB185-GTR11, PDB185-GTR13

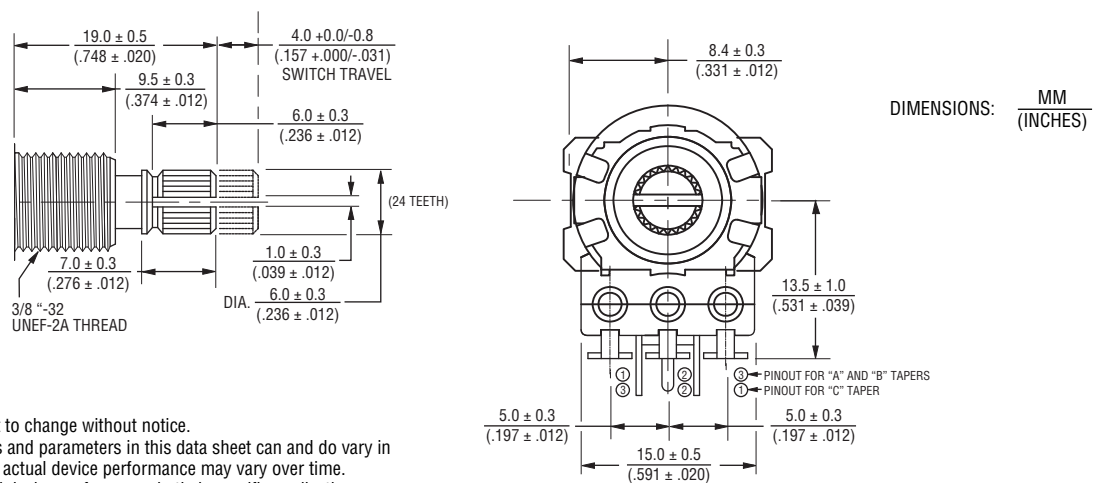



Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

BOURNS®

**PDB185-GTR31,
PDB185-GTR32**

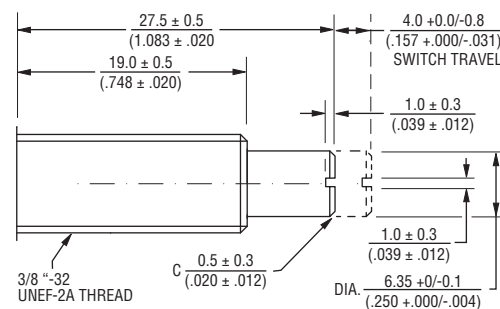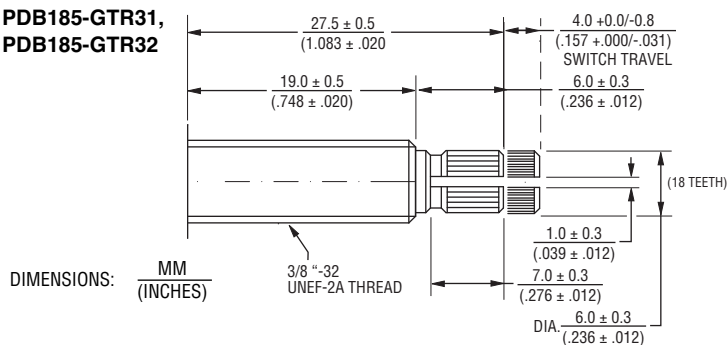

Switch Circuit



The image shows two technical drawings: a Nut on the left and a Washer on the right. The Nut is a hexagonal nut with a central hole. Its dimensions are: outer hexagon width 12.6 ± 0.5 (496 ± .020), inner hole diameter 14.3 (563), and thread specification 3/8"-32 UNEF-2A. The Washer is a circular flat disc. Its dimensions are: outer diameter 14.0 ± 0.5 (551 ± .020), inner hole diameter 10.0 ± 0.5 (394 ± .020), and thickness T = 0.5 ± 0.3 (.020 ± .012).

NUT

12.6 ± 0.5
(496 ± .020)

2.4 ± 0.3
(.094 ± .012)

14.3
(563)

3/8"-32
UNEF-2A THREAD


WASHER

14.0 ± 0.5
(551 ± .020)
DIA.


10.0 ± 0.5
(394 ± .020)
DIA.

T =
0.5 ± 0.3
(.020 ± .012)


A2 Taper

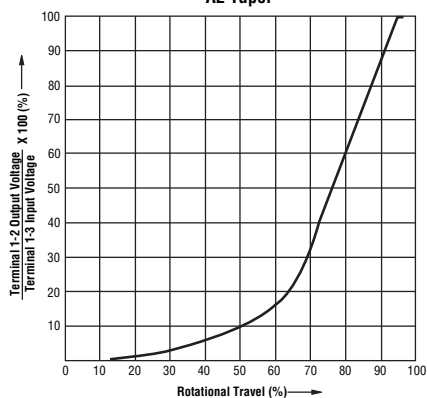

B0 Taper

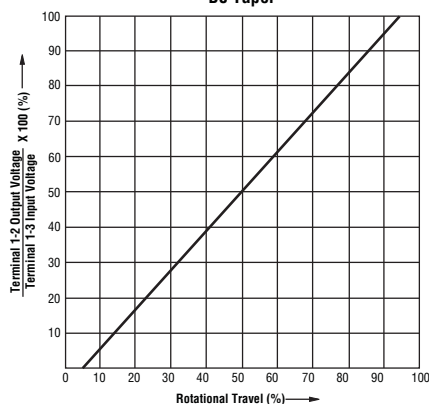

C2 Taper

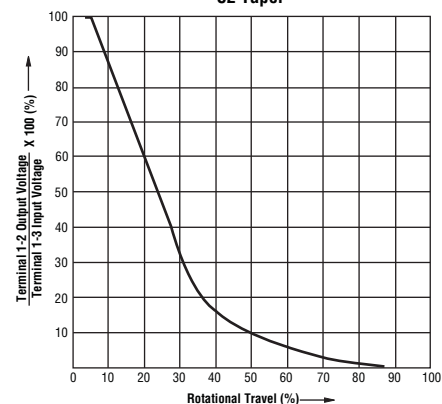


Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

Typical Part Marking



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9