

4

3

2

1


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			D1	ECR-14-001886	12FEB2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2151399-1

FOR REPLACEMENT PARTS FOR APPLICATOR 1528180
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1528180

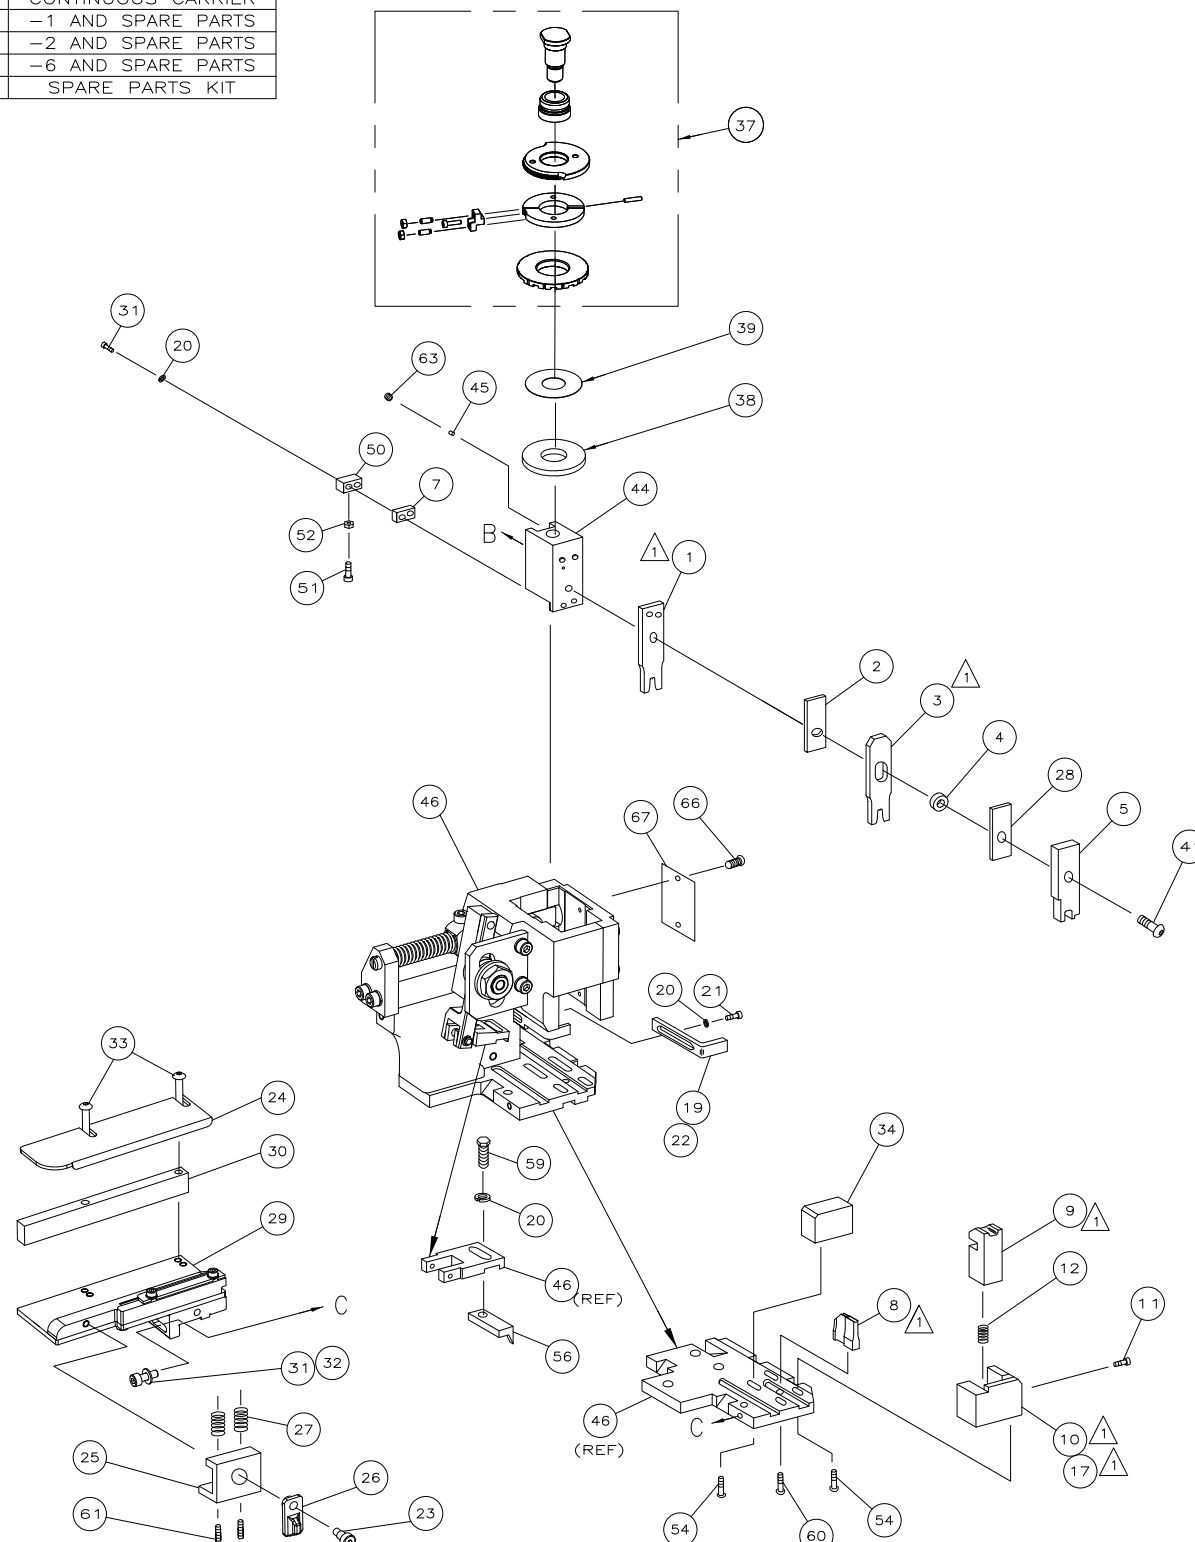
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV		TE Connectivity				
		CHK	RAGHAVENDRA						
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APVD		RAGHAVENDRA		NAME	
				PRODUCT SPEC		FINE ADJ SIDE FD HD-I APPL			
				APPLICATION SPEC					
MATERIAL		FINISH		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
						A3		C- 1528180	
CUSTOMER DRAWING						SCALE		SHEET 1 OF 2	REV D1

	—	1	1	1	1	1	1	1528180	PRINT, APPLICATOR LOG SHEET	72
	—	1	1	1	1	1	1	1338705—3	DOCUMENTATION PACKAGE	71
										70
										69
										68
	—	1	1	1	1	1	1	461264—5	PLATE, IDENTIFICATION	67
	—	2	2	2	2	2	2	21017—2	SCR,DRIVE(#2x.19)ID PLATE	66
										65
										64
	—	1	1	1	1	1	1	3—18031—0	SCR,SKT SET(M6X6)RAM	63
										62
	—	2	2	2	2	2	2	2—18032—5	SCR,SET(M5X20)DRAG	6
	—	1	1	1	1	1	1	18024—7	SCR,BHC(M4X10)ANVIL	60
	—	1	1	1	1	1	1	5—18022—2	SCR,HEX(M4X8)FEED FINGER	59
										58
	—	1	1	1	1	1	1	1338685—1	PAWL, FEED	56
										55
	—	4	4	4	4	4	4	18024—8	SCR,BHC(M4x12)SHEAR HOLDER	54
										53
	—	1	1	1	1	1	1	18030—1	NUT,HEX(M3)HOLD DOWN	52
	—	1	1	1	1	1	1	811242—5	BUMPER, HOLDDOWN	51
	—	1	1	1	1	1	1	690753—2	SPACER, TONKER	50
	—	1	1	1	1	1	1	18024—3	SCR,BHC(M3X10)CAM	49
	—	—	1	—	—	1	—	1338675—1	CAM, PRE FEED 30 & 40 mm ST	48
	—	1	—	1	1	—	1	1338676—1	CAM, POST FEED 30 & 40 mm ST	47
	—	1	1	1	1	1	1	1320999—3	APPLICATOR BASIC SUBASSY	46
	—	1	1	1	1	1	1	690191—1	PLUG, NYLON	45
	—	1	1	1	1	1	1	1338660—1	RAM	44
										43
										42
	—	1	1	1	1	1	1	2—18024—6	SCR,BHC(M8X25)RAM	41
										40
	—	1	1	1	1	1	1	690125—1	SHIM SUBASSY	39
	—	1	1	1	1	1	1	469367—8	SPACER, FINE ADJUST	38
	—	1	1	1	1	1	1	879103—3	FINE ADJUST HEAD SUBASSY	37
										36
										35
	—	1	1	1	1	1	1	1320934—3	SUPPORT, TERMINAL	34
	—	2	2	2	2	2	2	1—18024—0	SCR,BHC(M4X20)STRIP GUIDE	33
	—	1	1	1	1	1	1	18027—2	WASHER, FLAT(M4)	32
	—	3	3	3	3	3	3	1—18023—2	SCR,SKT CAP(M4X12)MOUNT BLOCK	31
	—	1	1	1	1	1	1	1320908—1	SPACER, STRIP GUIDE	30
	—	1	1	1	1	1	1	1633073—1	STRIP GUIDE PLATE ASSY	29
	—	1	1	1	1	1	1	455888—3	SPACER, FRONT SHEAR DEP	28
	—	2	2	2	2	2	2	1—22284—0	SPRING, DRAG	27
	—	1	1	1	1	1	1	356835—1	LEVER, DRAG RELEASE	26
	—	1	1	1	1	1	1	240792—1	DRAG, TERMINAL	25
	—	1	1	1	1	1	1	1320928—1	PLATE, STRIP GUIDE	24
	—	1	1	1	1	1	1	980371—4	SCR,SHC SHLD	23
	—	1	—	1	1	—	1	690472—2	STRIPPER	22
	—	1	1	1	1	1	1	1—18023—1	SCR,SHC(M4X10)STRIPPER	21
	—	4	4	4	4	4	4	18025—2	WASHER,LOCK(M4)STRIPPER	20
	—	—	1	—	—	1	—	690472—1	STRIPPER	19
1	—	1	—	—	1	—	—	1338684—1	HOLDER, SHEAR, FRONT (NO—CUT)	17
										16
										15
										14
										13
	—	1	1	1	1	1	1	3—22280—3	SPRING, SHEAR	12
	—	1	1	1	1	1	1	356885—4	STOP, SHEAR	11
	—	—	1	1	—	1	1	1320921—1	HOLDER, SHEAR, FRONT (CUT)	10
	—	1	1	1	1	1	1	462006—1	SHEAR, FLOAT (FRONT)	9
	1	2	2	2	1	1	1	1338692—4	ANVIL	8
	—	1	1	1	1	1	1	3—240641—9	SPACER, DEPRESSOR (REAR)	7
										6
	—	1	1	1	1	1	1	2—455889—0	DEPRESSOR, SHEAR (FRONT)	5
	—	1	1	1	1	1	1	238011—4	SPACER, BLOCK CRIMPER	4
1	1	2	2	2	1	1	1	1—854830—4	CRIMPER, INSULATION	3
	—	1	1	1	1	1	1	455888—4	SPACER, CRIMPER	2
1	1	2	2	2	1	1	1	4—456404—7	CRIMPER, WIRE	1

[illegible]


 1. RECOMMENDED SPARE PARTS.

2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. THIS APPLICATOR HAS BEEN DESIGNED TO APPLY WIRE WITH THIN WALL (FLR) INSULATION. THE INSULATION CRIMP AND APPLICABLE INSULATION RANGE MAY NOT CONFORM TO PARAMETERS IN THE APPLICATION SPEC.





* WARNING:

ON INSTALLATION, SET WIRE
DISC TO LARGEST WIRE SIZE
SETTING. USE OF SETTINGS
BELOW MIN REQUIRED CRIMP
HEIGHT SETTING WILL CAUSE
DAMAGE TO CRIMP TOOLING.



GUIDE OFF INSULATION

POST FEED 40 mm STROKE	POST FEED 30 mm STROKE	PRE FEED 30 mm STROKE	PRE FEED 40 mm STROKE
 Diagram showing the POST FEED 40 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (47) is shown with a stroke of 40 mm. The feed arm (49) is extended.	 Diagram showing the POST FEED 30 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (47) is shown with a stroke of 30 mm. The feed arm (49) is extended.	 Diagram showing the PRE FEED 30 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (48) is shown with a stroke of 30 mm. The feed arm (49) is extended.	 Diagram showing the PRE FEED 40 mm STROKE configuration. The main body (44) is labeled (REF). The feed mechanism (48) is shown with a stroke of 40 mm. The feed arm (49) is extended.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9