

#### FEATURES

- Ranges from 1 to 30 "H<sub>2</sub>O and 2.5 to 75 mbar differential or gage
- Precision temperature compensated
- Calibrated offset and span
- Extremely low position sensitivity
- Excellent long term stability
- Ratiometric output or internal supply regulation

#### SERVICE


Non-corrosive, non-ionic working fluids such as clean dry air, dry gases and the like.

The media wetted materials are:

- silicon diaphragm
- glass filled nylon
- RTV
- ceramic (Al<sub>2</sub>O<sub>3</sub>)



#### EQUIVALENT CIRCUIT

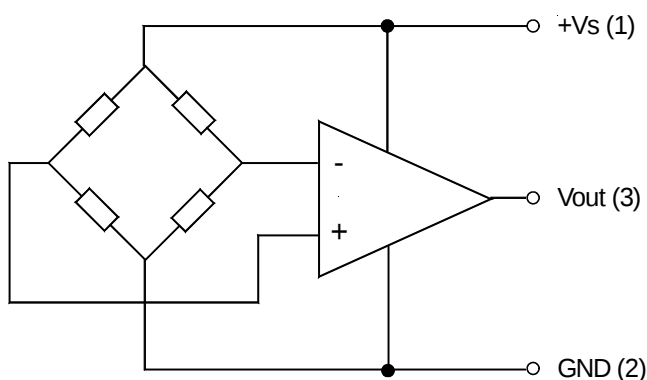

### SPECIFICATIONS

#### Maximum ratings (for all devices)

|                                     |                              |
|-------------------------------------|------------------------------|
| Supply voltage $V_s$                | 4.9 to 5.1 V (DC...C4)       |
|                                     | 7 to 30 V (DC...R4, DC...R5) |
| Lead temperature (soldering 5 sec.) | 315 °C                       |
| Maximum load current                |                              |
| Source                              | 2 mA                         |
| Sink                                | 20 µA                        |

#### Environmental specifications (for all devices)

|                                  |               |
|----------------------------------|---------------|
| Temperature range                |               |
| Compensated                      | 0 to 50°C     |
| Operating                        | -25 to +85°C  |
| Storage                          | -40 to +125°C |
| Humidity limits (non-condensing) | 0 to 95 %RH   |

**CAUTION** Applications requiring supply voltages greater than 20 V on power-up must have a 10 Ohm resistor installed between pin 1 of the sensor and the positiv (+) lead of the power supply.

If the sensor is subjected to a supply voltage of >20 V without ramp up, a current spike may occur causing the operational amplifier and/or the ASIC to fail.

Do not operate above 30 V max. Due to internal component ratings, the maximum safe operating voltage specification is 30 V.

### PRESSURE SENSOR CHARACTERISTICS

| Part no.  | Pressure ranges       | Proof pressure <sup>1</sup> | Burst pressure <sup>2</sup> |
|-----------|-----------------------|-----------------------------|-----------------------------|
| DC001N... | 1 "H <sub>2</sub> O   | 100 "H <sub>2</sub> O       | 200 "H <sub>2</sub> O       |
| DC002N... | 2 "H <sub>2</sub> O   | 100 "H <sub>2</sub> O       | 200 "H <sub>2</sub> O       |
| DC2R5N... | 2.5 "H <sub>2</sub> O | 100 "H <sub>2</sub> O       | 200 "H <sub>2</sub> O       |
| DC005N... | 5 "H <sub>2</sub> O   | 150 "H <sub>2</sub> O       | 300 "H <sub>2</sub> O       |
| DC010N... | 10 "H <sub>2</sub> O  | 150 "H <sub>2</sub> O       | 300 "H <sub>2</sub> O       |
| DC020N... | 20 "H <sub>2</sub> O  | 300 "H <sub>2</sub> O       | 450 "H <sub>2</sub> O       |
| DC030N... | 30 "H <sub>2</sub> O  | 450 "H <sub>2</sub> O       | 600 "H <sub>2</sub> O       |
| DC2R5B... | 2.5 mbar              | 250 mbar                    | 500 mbar                    |
| DC005B... | 5 mbar                | 250 mbar                    | 500 mbar                    |
| DC010B... | 10 mbar               | 375 mbar                    | 750 mbar                    |
| DC025B... | 25 mbar               | 375 mbar                    | 750 mbar                    |
| DC050B... | 50 mbar               | 750 mbar                    | 1125 mbar                   |
| DC075B... | 75 mbar               | 1125 mbar                   | 1500 mbar                   |

#### Notes

<sup>1</sup> Proof pressure is the maximum pressure which may be applied without causing durable shifts of the electrical parameters of the sensing element.

<sup>2</sup> Burst pressure is the maximum pressure which may be applied without causing damage to the sensing element or leaks from the housing.

**DC...C4 PERFORMANCE CHARACTERISTICS**0.25...4.25 V ratiometric output version ( $V_S = 5.0$  V,  $T_A = 25^\circ\text{C}$ , pressure applied to port 2)

| Characteristics                         |                                                | Min. | Typ. | Max. | Unit |
|-----------------------------------------|------------------------------------------------|------|------|------|------|
| Zero pressure offset                    | DC...G...                                      |      | 0.25 |      | V    |
|                                         | DC...D...                                      |      | 2.25 |      |      |
| Full scale span <sup>3</sup>            | DC...G...                                      |      | 4.0  |      |      |
|                                         | DC...D...                                      |      | ±2.0 |      |      |
| Total accuracy (0 - 50 °C) <sup>4</sup> | DC001N...<br>DC2R5B...                         |      | ±2.0 | ±3.0 | %FSO |
|                                         | DC002N..., DC2R5N...<br>DC005B...              |      | ±1.5 | ±2.5 |      |
|                                         | all others                                     |      | ±1.0 | ±2.0 |      |
| Offset position sensitivity (±1 g)      | DC001N... to DC2R5N...<br>DC2R5B..., DC005B... |      |      | ±10  | mV   |
|                                         | DC005N...<br>DC010B...                         |      |      | ±5   |      |
|                                         | all others                                     |      |      | ±1   |      |

**DC...R4 PERFORMANCE CHARACTERISTICS**0.25...4.25 V regulated output version ( $V_S = 15.0$  V,  $T_A = 25^\circ\text{C}$ , pressure applied to port 2)

| Characteristics                         |                                                | Min. | Typ. | Max. | Unit |
|-----------------------------------------|------------------------------------------------|------|------|------|------|
| Zero pressure offset                    | DC...G...                                      |      | 0.25 |      | V    |
|                                         | DC...D...                                      |      | 2.25 |      |      |
| Full scale span <sup>3</sup>            | DC...G...                                      |      | 4.0  |      |      |
|                                         | DC...D...                                      |      | ±2.0 |      |      |
| Total accuracy (0 - 50 °C) <sup>4</sup> | DC001N...<br>DC2R5B...                         |      | ±2.0 | ±3.0 | %FSO |
|                                         | DC002N..., DC2R5N...<br>DC005B...              |      | ±1.5 | ±2.5 |      |
|                                         | all others                                     |      | ±1.0 | ±2.0 |      |
| Offset position sensitivity (±1 g)      | DC001N... to DC2R5N...<br>DC2R5B..., DC005B... |      |      | ±10  | mV   |
|                                         | DC005N...<br>DC010B...                         |      |      | ±5   |      |
|                                         | all others                                     |      |      | ±1   |      |

**Notes:**<sup>3</sup> Full scale span is the algebraic difference between the output voltage at full-scale pressure and the output at zero pressure.<sup>4</sup> Total accuracy includes non-linearity, hysteresis, repeatability, zero offset and span error, thermal effect on zero offset and span. Non-linearity refers to the **Best Straight Line** fit measured for offset pressure, full-scale pressure and ½ full-scale pressure.

### DC...R5 PERFORMANCE CHARACTERISTICS

1...6 V regulated output version ( $V_s = 15.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , pressure applied to port 2)


| Characteristics                         |                        | Min. | Typ. | Max. | Unit |
|-----------------------------------------|------------------------|------|------|------|------|
| Zero pressure offset                    | DC...G...              |      | 1    |      | V    |
|                                         | DC...D...              |      | 3.5  |      |      |
| Full scale span <sup>3</sup>            | DC...G...              |      | 5.0  |      |      |
|                                         | DC...D...              |      | ±2.5 |      |      |
| Total accuracy (0 - 50 °C) <sup>4</sup> | DC001N...              |      | ±2.0 | ±3.0 | %FSO |
|                                         | DC2R5B...              |      |      |      |      |
|                                         | DC002N..., DC2R5N...   |      | ±1.5 | ±2.5 |      |
|                                         | DC005B...              |      |      |      |      |
|                                         | all others             |      | ±1.0 | ±2.0 |      |
| Offset position sensitivity (±1 g)      | DC001N... to DC2R5N... |      |      | ±10  | mV   |
|                                         | DC2R5B..., DC005B...   |      |      |      |      |
|                                         | DC005N...              |      |      | ±5   |      |
|                                         | DC010B...              |      |      |      |      |
|                                         | all others             |      |      | ±1   |      |

#### Notes:

<sup>3</sup> Full scale span is the algebraic difference between the output voltage at full-scale pressure and the output at zero pressure.

<sup>4</sup> Total accuracy includes non-linearity, hysteresis, repeatability, zero offset and span error, thermal effect on zero offset and span. Non-linearity refers to the **Best Straight Line** fit measured for offset pressure, full-scale pressure and ½ full-scale pressure.

### ELECTRICAL CONNECTION

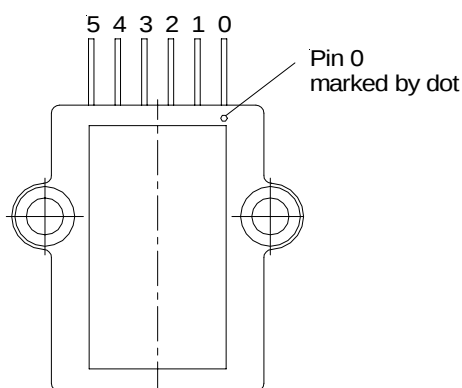


| Pin no. | Output version                                     |                                                  |                                            |
|---------|----------------------------------------------------|--------------------------------------------------|--------------------------------------------|
|         | DC...C4<br>(4 Pin)<br>0.25...4.25 V<br>ratiometric | DC...R4<br>(6 Pin)<br>0.25...4.25 V<br>regulated | DC...R5<br>(6 Pin)<br>1...6 V<br>regulated |
| 0       | no pin                                             | N / C                                            | N / C                                      |
| 1       | +Vs                                                | +Vs                                              | +Vs                                        |
| 2       | GND                                                | GND                                              | GND                                        |
| 3       | Vout                                               | Vout                                             | Vout                                       |
| 4       | I / C*                                             | I / C*                                           | I / C*                                     |
| 5       | no pin                                             | N / C                                            | N / C                                      |

\* Do not use for any reason

**Note:** The polarity indicated is for pressure applied to port 2

### OUTLINE DRAWING

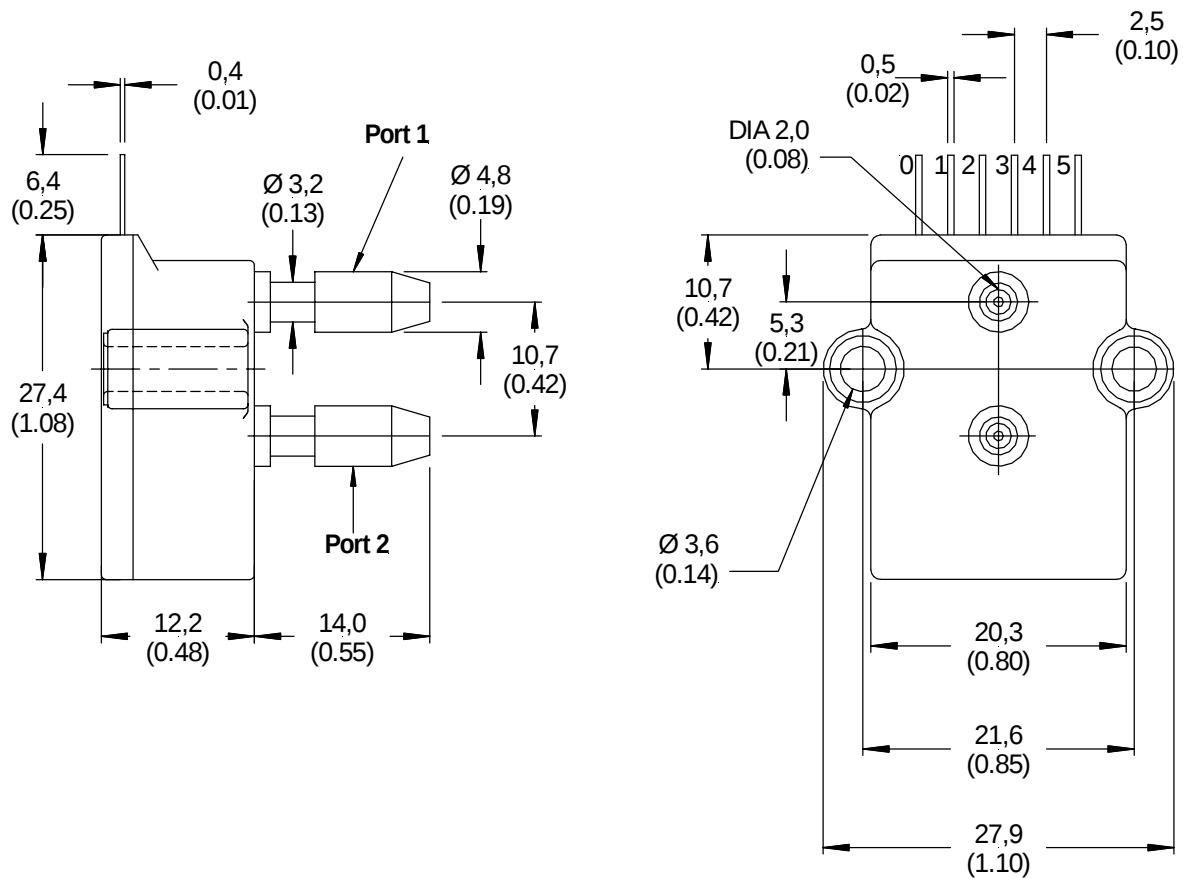

mass: approx. 10 g

dimensions mm (inches)

### ORDERING INFORMATION

| Pressure range                            | Output                       |                            |                      |
|-------------------------------------------|------------------------------|----------------------------|----------------------|
|                                           | 0.25...4.25 V<br>ratiometric | 0.25...4.25 V<br>regulated | 1...6 V<br>regulated |
| <b>Differential/Gage</b>                  |                              |                            |                      |
| 0 to 1 "H <sub>2</sub> O                  | DC001NGC4                    | DC001NGR4                  | DC001NGR5            |
| 0 to 2 "H <sub>2</sub> O                  | DC002NGC4                    | DC002NGR4                  | --- <sup>6</sup>     |
| 0 to 2.5 "H <sub>2</sub> O                | --- <sup>6</sup>             | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to 5 "H <sub>2</sub> O                  | DC005NGC4                    | DC005NGR4                  | DC005NGR5            |
| 0 to 10 "H <sub>2</sub> O                 | DC010NGC4                    | --- <sup>6</sup>           | DC010NGR5            |
| 0 to 20 "H <sub>2</sub> O                 | DC020NGC4                    | --- <sup>6</sup>           | --- <sup>5</sup>     |
| 0 to 30 "H <sub>2</sub> O                 | DC030NGC4                    | DC030NGR4                  | DC030NGR5            |
| <b>Differential<br/>(Pressure/vacuum)</b> |                              |                            |                      |
| 0 to ±1 "H <sub>2</sub> O                 | DC001NDC4                    | DC001NDR4                  | DC001NDR5            |
| 0 to ±2 "H <sub>2</sub> O                 | DC002NDC4                    | DC002NDR4                  | DC002NDR5            |
| 0 to ±2.5 "H <sub>2</sub> O               | DC2R5NDC4                    | DC2R5NDR4                  | DC2R5NDR5            |
| 0 to ±5 "H <sub>2</sub> O                 | DC005NDC4                    | DC005NDR4                  | DC005NDR5            |
| 0 to ±10 "H <sub>2</sub> O                | DC010NDC4                    | DC010NDR4                  | DC010NDR5            |
| 0 to ±20 "H <sub>2</sub> O                | DC020NDC4                    | DC020NDR4                  | DC020NDR5            |
| 0 to ±30 "H <sub>2</sub> O                | DC030NDC4                    | DC030NDR4                  | DC030NDR5            |
| <b>Differential/Gage</b>                  |                              |                            |                      |
| 0 to 2.5 mbar                             | --- <sup>6</sup>             | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to 5 mbar                               | --- <sup>6</sup>             | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to 10 mbar                              | --- <sup>6</sup>             | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to 25 mbar                              | DC025BGC4                    | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to 50 mbar                              | DC050BGC4                    | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to 75 mbar                              | --- <sup>6</sup>             | --- <sup>6</sup>           | --- <sup>6</sup>     |
| <b>Differential<br/>(Pressure/vacuum)</b> |                              |                            |                      |
| 0 to ±2.5 mbar                            | DC2R5BDC4                    | --- <sup>6</sup>           | DC2R5BDR5            |
| 0 to ±5 mbar                              | DC005BDC4                    | --- <sup>6</sup>           | --- <sup>6</sup>     |
| 0 to ±10 mbar                             | DC010BDC4                    | DC010BDR4                  | DC010BDR5            |
| 0 to ±25 mbar                             | DC025BDC4                    | DC025BDR4                  | DC025BDR5            |
| 0 to ±50 mbar                             | DC050BDC4                    | DC050BDR4                  | DC050BDR5            |
| 0 to ±75 mbar                             | DC075BDC4                    | DC075BDR4                  | DC075BDR5            |

#### Note

<sup>6</sup> These devices are available on special request. Minimum order quantity may apply.

Sensortech reserves the right to make changes to any products herein. Sensortech does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9