



### Features

- 2" x 4" x 1.3" Package
- For 1U Applications
- 150W w/air, 100W convection cooled
- Universal Input 90-264 VAC
- Power Fail/Output Good Signal
- Approved to CSA/EN/IEC/UL60950, 2nd Edition
- 3 Year Warranty
- RoHS Compliant



### Description

The CINT1150 family is the latest offering in high density single output open-frame AC/DC power supplies. Approved to EN/IEC/UL60950-1, 2nd edition, the CINT1150 family is ideal for lighting, industrial printers, gaming equipment, and many other applications where power density and cost are critical. The CINT1150 operates at universal input range of 90 to 264Vac and wide temperature range -10°C to +70°C, delivering full rated output power up to +50°C. In addition, these models feature Power Fail and DC OK signals.

### Model Selection

| Model Number     | Volts | Output Current |             | Ripple & Noise**    | Total Regulation | OVP Threshold*** |
|------------------|-------|----------------|-------------|---------------------|------------------|------------------|
|                  |       | w/200LFM air   | Convection* |                     |                  |                  |
| CINT1150A1206K01 | 12V   | 12.5A          | 8.33A       | 0.5%RMS, 1.2% pk-pk | ±5%              | 14.0 ± 1.1V      |
| CINT1150A2406K01 | 24V   | 6.25A          | 4.17A       | 0.5%RMS, 1.0% pk-pk | ±5%              | 28.0 ± 2.5V      |
| CINT1150A4806K01 | 48V   | 3.13A          | 2.08A       | 0.5%RMS, 1.0% pk-pk | ±5%              | 55.0 ± 4.0V      |
| CINT1150A5606K01 | 56V   | 2.68A          | 1.79A       | 0.5%RMS, 1.0% pk-pk | ±5%              | <59.9V           |

Notes: \* Maximum output power is 95 Watts for input voltage of 90-105VAC at 50°C convection. For input voltage of 105Vac or more, the total power is 100 Watts at 50°C convection.

\*\* Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors.

### General Specifications

|                       |   |                            |   |
|-----------------------|---|----------------------------|---|
| <b>AC Input</b>       | 100-240Vac, ±10%, 47-63Hz, 1Ø<br>120-370Vdc     | <b>Turn On Time</b>        | Less than 2 sec. @115Vac (inversely proportional to input voltage and thermistor temperature) |
| <b>Input Current</b>  | 115Vac: 2A, 230Vac: 1A                          | <b>Hold-up Time</b>        | >12mS at full load, 120Vac  |
| <b>Inrush Current</b> | 264Vac, cold start: will not exceed 50A         | <b>Signals</b>             | AC Power Fail, DC OK  |
| <b>Input Fuses</b>    | F1, F2: 4A, 250Vac fuses provided on all models | <b>Overload Protection</b> | Hiccup Mode   |

**General Specifications** (continued)

|                              |  |                                 |  |
|------------------------------|--|---------------------------------|--|
| <b>Earth Leakage Current</b> | <750 $\mu$ A@264Vac, 60Hz, NC  | <b>Short Circuit Protection</b> | Provided - no damage will occur if the output is shorted. Hiccup Mode  |
| <b>Efficiency</b>            | 88% typical at 115Vac  | <b>Overvoltage Protection</b>   | OVP firing reduces output voltage to <50% of nominal in <50mS. See chart for trip range.                                     |
| <b>Output Power</b>          | 150W continuous with 200 lfm airflow, 100W convection cooled – See chart for specific voltage model ratings.                             | <b>Switching Frequency</b>      | PFC: Variable 30-400kHz.<br>Main Converter: Variable 35-180kHz, 65-70kHz at full load.                                       |
| <b>Transient Response</b>    | 50% load step. $\Delta i/\Delta t$ : <0.2A/ $\mu$ S<br>Max Volt Deviation = 3%   | <b>Isolation</b>                | Input-Output: 4000Vac<br>Input-Ground: 1800Vac<br>Output-Ground: 500Vac  |
| <b>Ripple and Noise</b>      | See chart  | <b>Operating Temperature</b>    | -10°C to +70°C   |
| <b>Output Voltage</b>        | See chart  | <b>Temperature Derating</b>     | Derate output power linearly above 50°C to 50% at 70°C   |
| <b>Voltage Adjustability</b> | +/-5% from nominal   | <b>Storage Temperature</b>      | -40°C to +85°C   |
| <b>Minimum Load</b>          | Not required   | <b>Altitude</b>                 | Operating: -500 to 10,000 ft<br>Non-operating: -500 to 40,000 ft.  |
| <b>Total Regulation</b>      | +/- 5%. See chart  | <b>Relative Humidity</b>        | 5% to 95%, non-condensing  |
| <b>Vibration</b>             | Operating: 0.003g/Hz, 1.5grms overall, 3 axes, 10 min/axis<br>Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 1 hr/axis | <b>Shock</b>                    | Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total<br>Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total |
| <b>Dimensions</b>            | W: 2.0" x L: 4.0" x H: 1.3"  | <b>Safety Standards</b>         | EN/CSA/UL/IEC60950-1, 2nd Edition  |
| <b>Weight</b>                | 183g   | <b>MTBF</b>                     | 640,000 hours at 100W convection,<br>1,500,000 hours at 150W with 200LFM air   |


**Auxiliary Signals**

|                       |                                       |                    |  |
|-----------------------|---------------------------------------|--------------------|--|
| <b>AC Power Fail:</b> | During normal operations, stays HIGH. | <b>Power Fail:</b> | Goes LOW with 5 mS warning before loss of output power due to AC failure                             |
|                       |                                       | <b>DC OK:</b>      | Open collector logic signal goes and stays HIGH 100mS to 500mS after main output reaches regulation. |

## EMI/EMC Compliance

|   |   |
|---|---|
| Conducted Emissions                     | EN55011/22 Class B, FCC Part 15, Subpart B, Class B                               |
| Radiated Emissions                      | EN55011/22 Class A, FCC Part 15, Subpart B, Class A w/6db margin                  |
| Static Discharge Immunity               | EN61000-4-2, Criteria A, 6kV Contact Discharge, 8kV air discharge                 |
| Radiated RF Immunity                    | EN61000-4-3, 3V/m, Criteria A   |
| EFT/Burst Immunity                      | EN61000-4-4, 2kV/5kHz, Criteria A   |
| Line Surge Immunity                     | EN61000-4-5, 1kV differential, 2kV common-mode, Criteria A                        |
| Conducted RF Immunity                   | EN61000-4-6, 3Vrms, Criteria A  |
| Power Frequency Magnetic Field Immunity | EN61000-4-8, 3A/m, Criteria A   |
| Voltage Dip Immunity                    | EN61000-4-11, 0% Vin, 0.5cycle; 40% Vin, 5 cycles; 70% Vin, 25 cycles; Criteria A |
| Line Harmonic Emissions                 | EN61000-3-2, Class A, B, C, & D   |
| Flicker Test                            | EN61000-3-3, Complies (dmax<6%)   |

## Mechanical Drawing

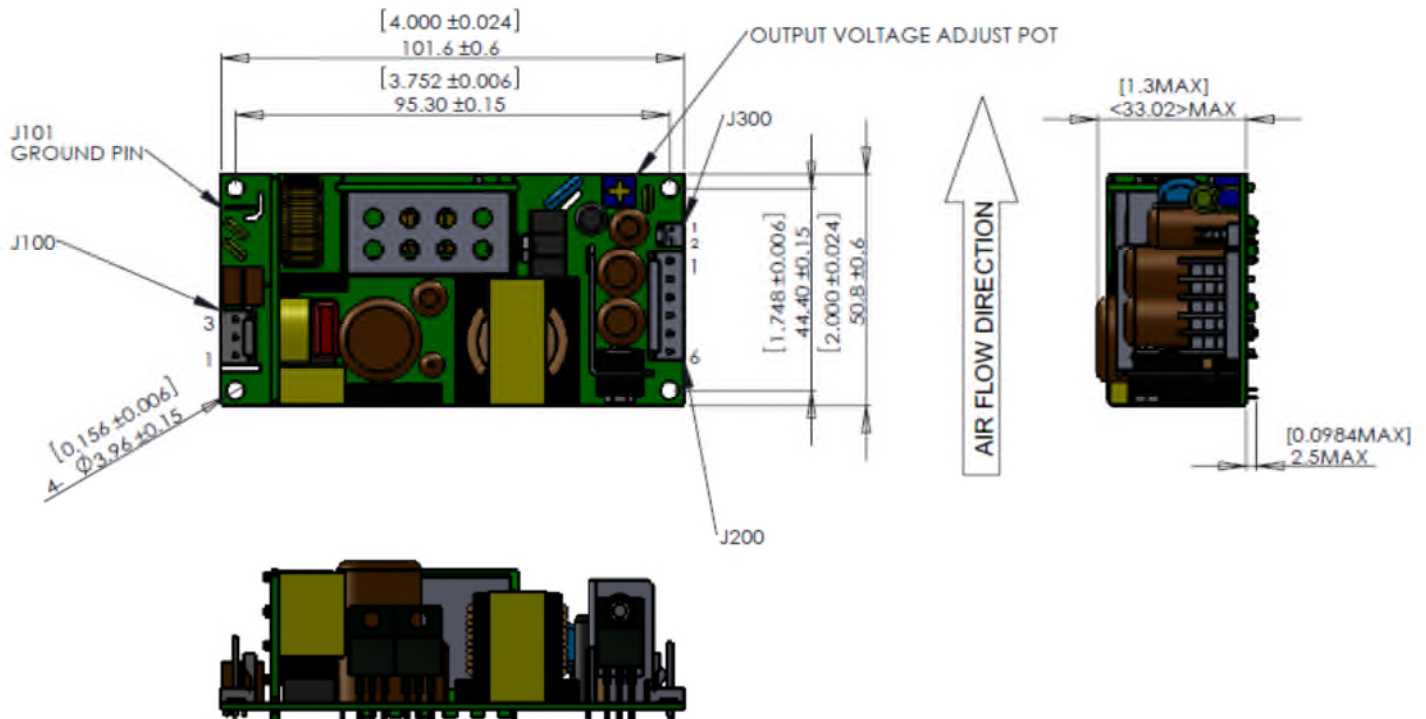


## Connector Information

| Input Connector J100                                      | Ground J101                            | DC Output Connector J200  | Signal Connector J300                                  |
|---|--|---|--|
| PIN 1) AC LINE<br>PIN 2) EMPTY<br>PIN 3) AC NEUTRAL       | 0.187" FASTON TAB                      | PIN 1) +Vout PIN 4) -Vout<br>PIN 2) +Vout PIN 5) -Vout<br>PIN 3) +Vout PIN 6) -Vout | PIN 1) PF/DC OK<br>PIN 2) Common                       |
| Mating Connector:<br>Molex 09-50-3031<br>Pins= 08-52-0072 | Mating Connector:<br>Molex 01-90020009 | Mating Connector:<br>AMP 640250-6<br>Pins = 640252-1                                | Mating Connector:<br>Molex 1375820-2<br>Pins = 1375819 |

## Power Fail/DC OK Signals – J300


### AC Power Failure/DC OK

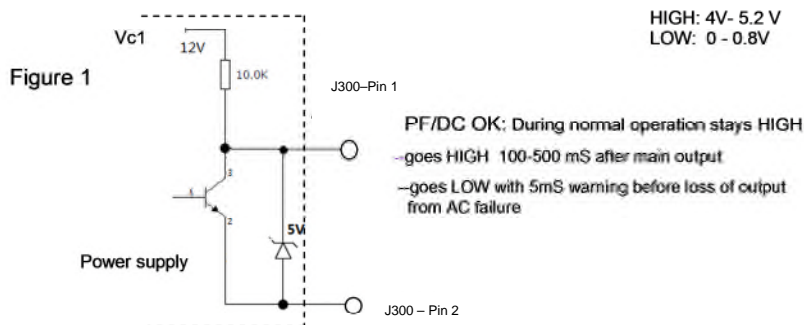


AC Power failure and DC OK signals use the same pin ,so the signals can be used as follows:

**DC OK:** Pin2 = HIGH & Pin1 = HIGH

**AC Power Failure:** Pin2 = LOW & Pin1 = LOW

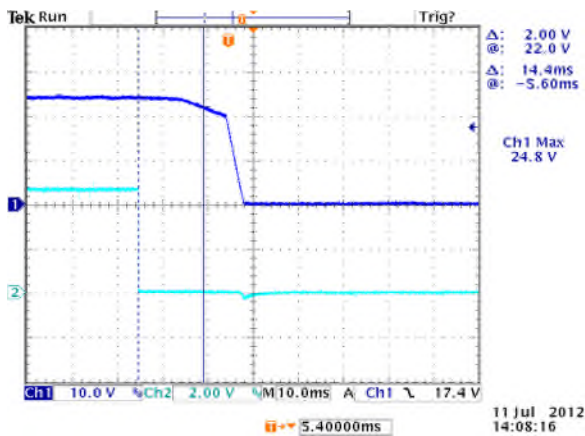

[AC POWER FAIL SIGNAL](#)

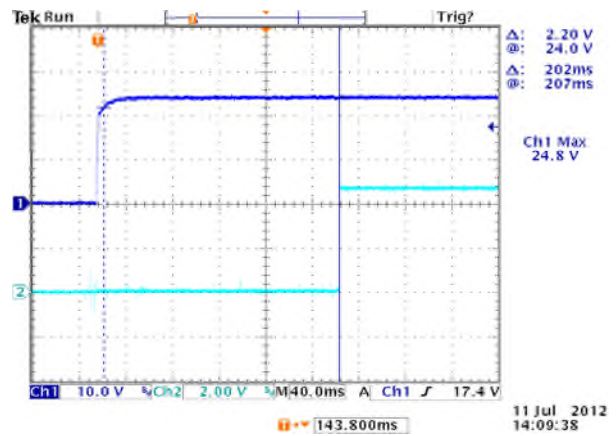

[DC OK SIGNAL](#)

## Isolation Specifications

| Parameter                      | Conditions/Description | Min        | Nom | Max | Units |
|--------------------------------|------------------------|------------|-----|-----|-------|
| Insulation Safety Rating       | Input/Ground           | Basic      |     |     |       |
|                                | Input/Output           | Reinforced |     |     |       |
|                                | Output/Ground          | n/a        |     |     |       |
| Electric Strength Test Voltage | Input/Ground           | 1800       | -   | -   | Vac   |
|                                | Input/Output           | 4000       | -   | -   | Vac   |
|                                | Output/Ground          | 500        | -   | -   | Vac   |

## Input Specifications

All specifications apply over specified input voltage, output load, and temperature range, unless otherwise noted.

| Parameter                 | Conditions/Description   | Min | Nom     | Max | Units |
|---------------------------|--|-----|---------|-----|-------|
| Input Voltage             |  | 90  | 115/230 | 264 | Vac   |
| Turn-On Input Voltage     | Ramping up   |     | 82.7    |     | Vac   |
| Turn-Off Input Voltage    | Ramping down   |     | 67.0    |     | Vac   |
| Input Frequency           |  | 47  | 50/60   | 63  | Hz    |
| Inrush Current Limitation | 264Vac, cold start   | -   | -       | 50  | A     |
| Power Factor              | $V_{i\ nom}, I_{o\ nom}$   | 0.9 | -       | -   |       |
| Efficiency                | $V_{i\ nom}, I_{o\ nom}$<br>CINT1150A1206K01<br>CINT1150A2406K01<br>CINT1150A4806K01<br>CINT1150A5606K01 | -   | 88%     | -   | %     |

## Protection


All specifications apply over specified input voltage, output load, and temperature range, unless otherwise noted

| Parameter                   | Conditions/Description                | Min                              | Nom | Max | Units   |
|-----------------------------|---------------------------------------|----------------------------------|-----|-----|---------|
| Input Fuse                  | Not user accessible                   |                                  |     |     |         |
| Input Transient Protection  | 2KV(CM) and 1KV(DM) surge             |                                  |     | 2   | KV (CM) |
| Output                      | No-load                               | Hiccup Mode                      |     |     |         |
|                             | Short Circuit                         | Hiccup Mode                      |     |     |         |
|                             | Overload                              | Hiccup Mode                      |     |     |         |
| Oversvoltage Protection     | Latch style                           | See Models chart for trip ranges |     |     |         |
| Over temperature Protection | Automatic power shutdown at TC =155°C |                                  |     |     |         |

## Characteristic Curves


### Output vs. Temperature

100W convection cooled and 150W continuous with 200 LFM airflow, Derating output power to 50% at 70°C.

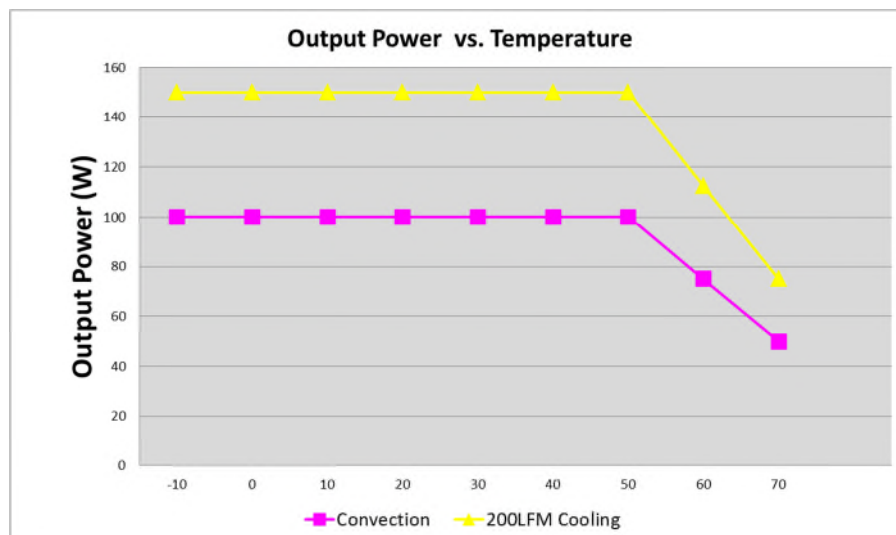


## Efficiency vs. Loading

The high efficiency is achieved by using LLC technology, PFC topology minimizing switching losses. Synchronous SCHOTTKY or ultra-fast diode is used as rectifier in CINT1150 family because of high output voltage level.

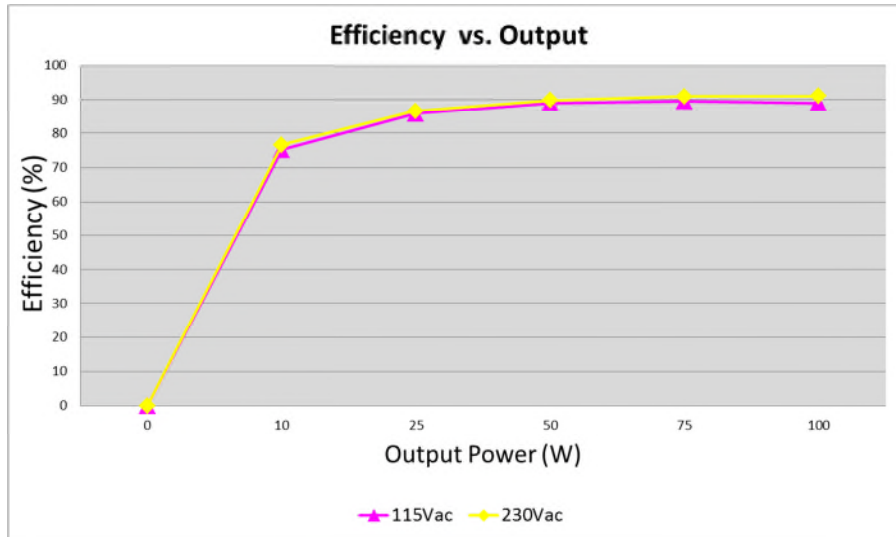


## Ripple & Noise


To verify that the output ripple and noise does not exceed the level specified in the product specification. Measured using a scope probe socket with 0.1uF ceramic and a 10uF electrolytic capacitor connected in parallel across it, 20MHz BW.

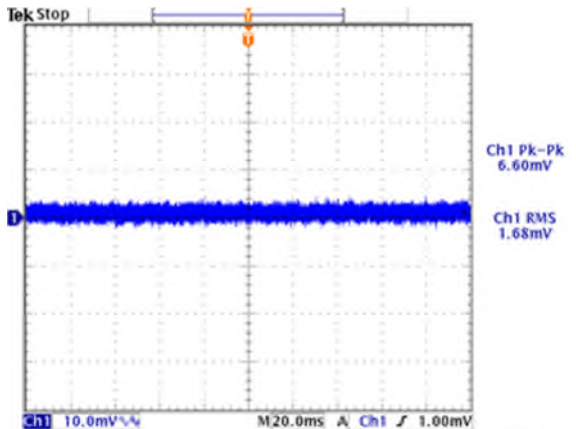


24V OUT, NO LOAD, 90VAC, 60HZ

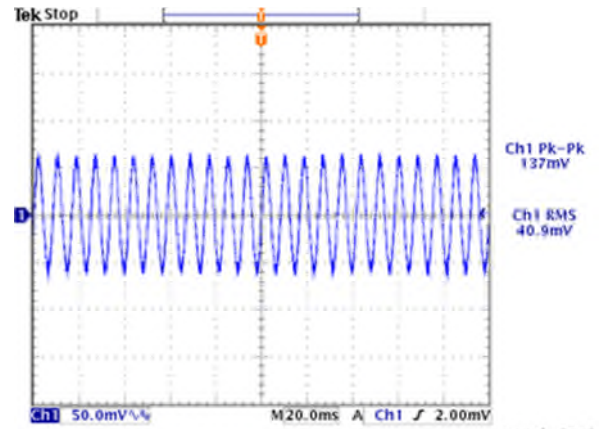

24V OUT, FULL LOAD, 90VAC, 60HZ

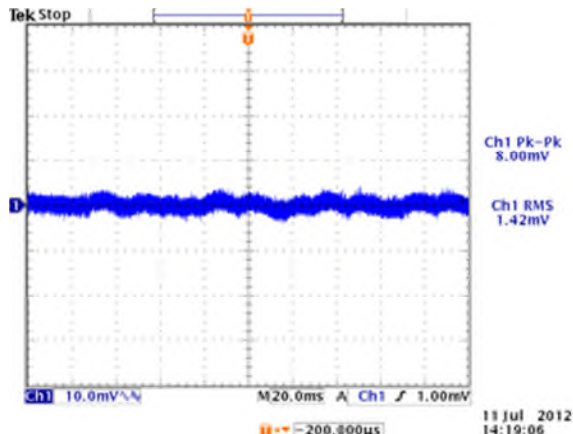


24V OUT, NO LOAD, 264VAC, 50HZ

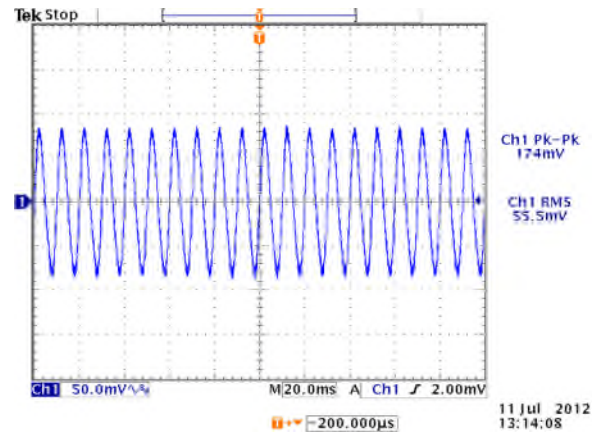


24V OUT, FULL LOAD, 264VAC, 50HZ

### Output Transient Response

50% load step within the regulation limits of minimum and maximum load,  $di/dt < 0.2A/\mu Sec$ . Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%, This test is performed on the MAIN OUTPUT ONLY.

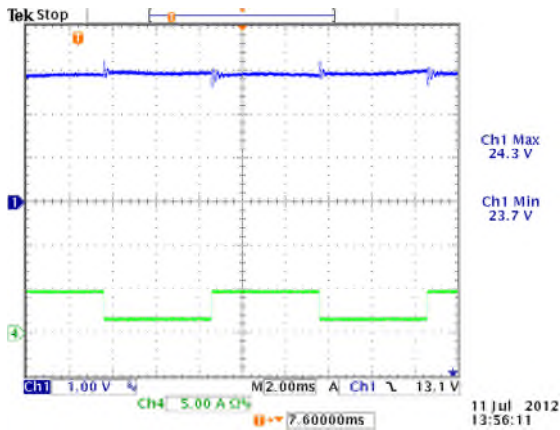


[24V OUT, 120VAC, 25% TO 75% LOAD STEP](#)

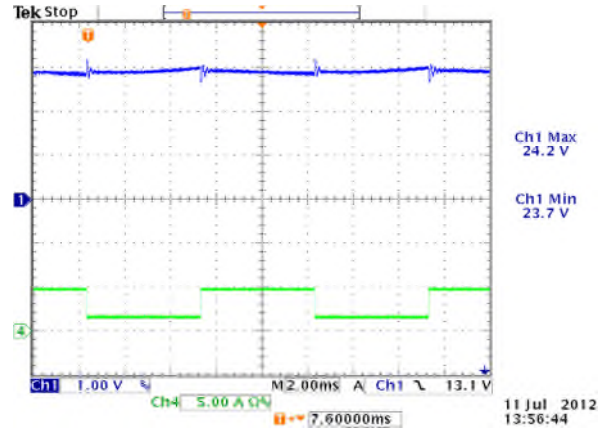


[24V OUT, 240VAC, 25% TO 75% LOAD STEP](#)

### Output Overload Characteristic

Supply shall protect itself against Overload conditions. The Power Supply shall recover from Overload Conditions without operator intervention.

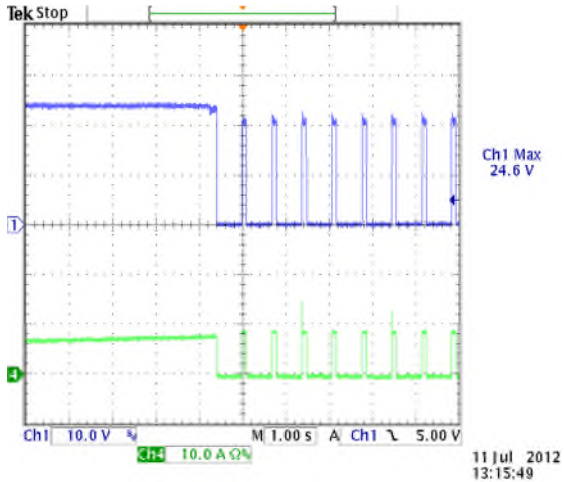


[24V OUT, 90VAC](#)

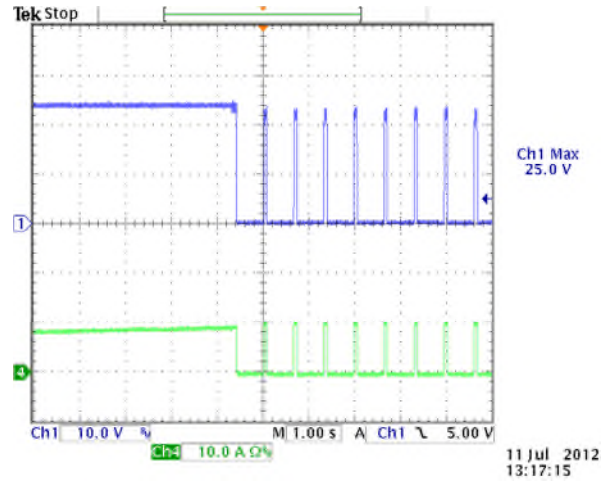


[24V OUT, 264VAC](#)

### Short Circuit Protection

Supply shall protect itself against Short Circuit conditions. No damage will occur if the output is shorted..

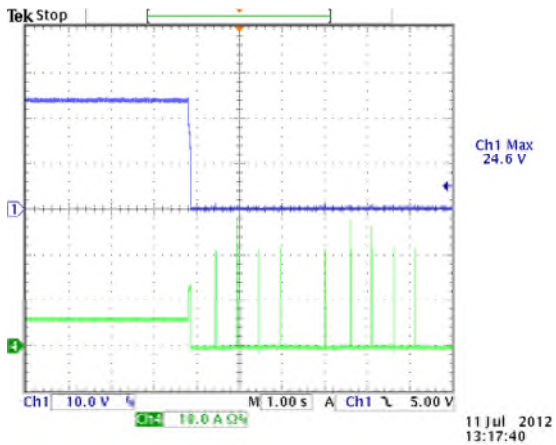


[24V OUT, 90VAC](#)

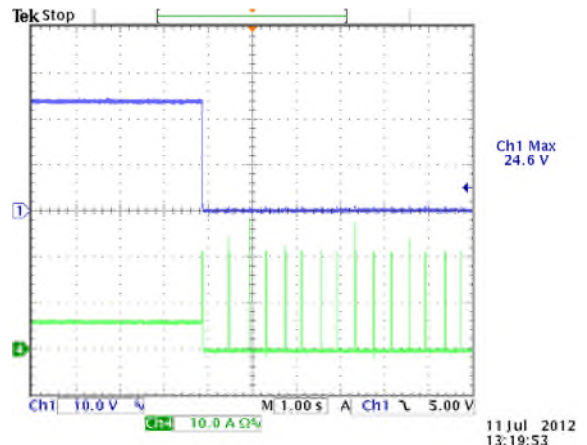


[24V OUT, 264VAC](#)

### Overvoltage Protection

OVP firing reduces output voltage to <50% of nominal in <50ms. See models chart for trip ranges.

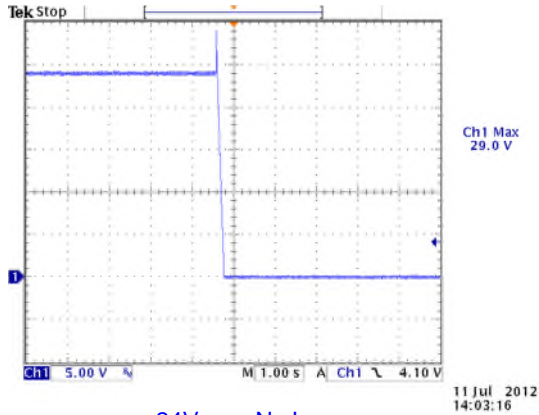


24V OUT, NO LOAD

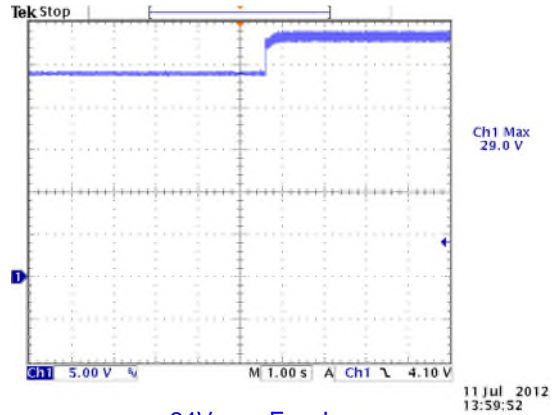


24V OUT, FULL LOAD

### Turn On Time

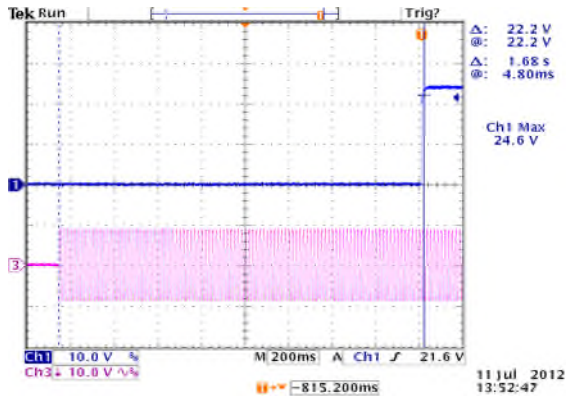


90VAC, FULL LOAD

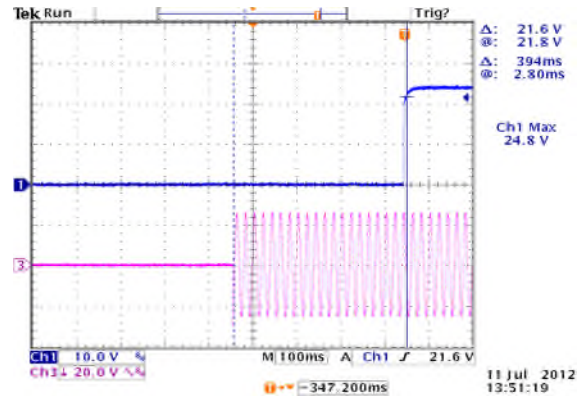

264VAC, FULL LOAD

### Hold Up Time

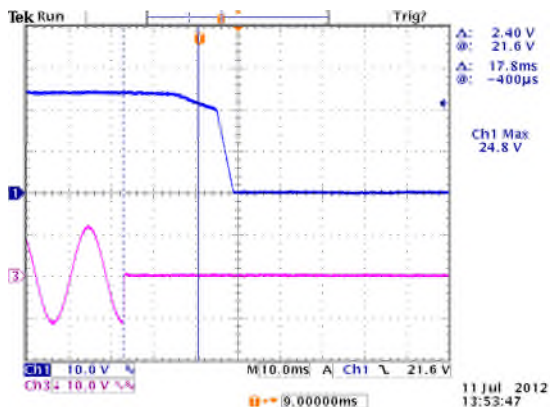

120VAC, FULL LOAD



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9