



The Leading Enterprise Internet of Things Solution



ALTA Wireless Thermostat

General Description

The Monnit ALTA thermostat is designed specifically for remote configuration and energy savings. It features an integrated motion sensor to auto detect if an area or room is occupied and can be set to enter an energy saving state when not needed. The thermostat will allow you to set a maximum and minimum temperature range for both occupied and non-occupied states. The system will auto adjust comfort levels when personnel arrive and automatically return to normal when they leave. It is also a perfect solution for public buildings such as corporate facilities or schools and churches as there are no physical buttons on the device. This prevents random adjustments by unauthorized people.

Features

- Allows for remote setting and monitoring of HVAC systems.
- Detects motion for occupied/non-occupied status.
- Prevents unauthorized adjustments or tampering.
- Configuration lockout jumper prevents changes at the hardware level.
- Full functionality and startup without a gateway (gateway is required for configuration changes and to monitor the device in iMonnit).

Example Applications


- Office buildings.
- Schools and churches.
- Stores and restaurants.
- Sports and concert venues.
- Remote buildings.

ALTA Wireless Thermostat Features

- Wireless range of 1,200+ feet through 12+ walls *
- 900 MHz Frequency Hopping Spread Spectrum (FHSS) 868 and 433 MHz Frequency Agile
- Improved interference immunity
- Encrypt-RF® Security (Diffie-Hellman Key Exchange + AES-128 CBC for sensor data messages)
- Onboard data memory stores up to 512 readings per sensor:
 - 10-minute heartbeats = 3.5 days
 - 2-hour heartbeats = 42 days
- Over-the-air updates (future proof)
- Powered by HVAC system

* Actual range may vary depending on environment.

Wireless Range Comparison

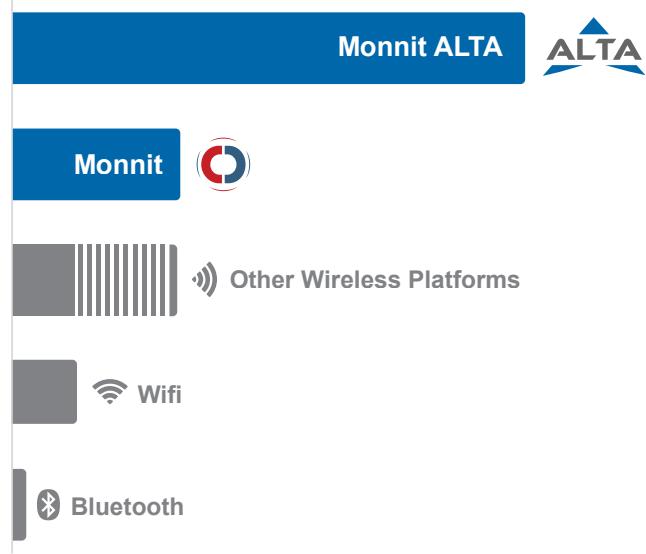

ALTA Wireless Thermostat Specifications


Supply Voltage	12 VAC - 24 VAC (powered via HVAC system)
Current Consumption	0.7 μ A (sleep mode) 2 mA (radio idle/off mode) 2 mA (measurement mode) 25 mA (radio RX mode) 35 mA (radio TX mode)
Operating Temperature Range	-40°C to 85°C (-40°F to 185°F) *
Temperature Reading Accuracy	\pm 1°C
RH Accuracy	\pm 3% under normal conditions (10% - 90% RH) **
RH Operating Range	0 – 100% RH **
RH Response Time	8 sec (tau 63%) **
Motion Sensor Detection Range	16.4 ft (5 m)
Indicator Lights	Six LED indicators (Heating, Cooling, Fan, Power, Occupied, Radio (RF))
Pass-through Current Rating on Heat, Cool, and Fan Connections	Continuous: 1 A RMS Surge: 8.5 A Peak
Peak Voltage on Heat, Cool, and Fan Connections	+/- 800 Volts
Dimensions	5.5 x 3.355 x 1.25 in. (139.7 x 85.217 x 31.75 mm)
Wireless Range	1,200+ ft. non-line-of-sight
Security	Encrypt-RF® (256-bit key exchange and AES-128 CTR)
Certifications	   Industry Canada 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05).

* At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.

** If humidity sensor option is installed. If thermistor option is present the thermostat only reads temperature and reports a value of 0% humidity.


Note: The thermostat features a physical configuration lockout jumper which can be set to prevent changes to any settings, even through the iMonnit portal. This prevents any hacking or remote tampering of any kind. If used, the physical jumper will need to be removed to change settings.

Thermostat Connections

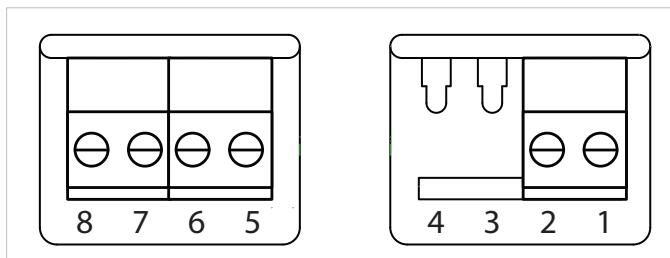


Pin	Description	Color	Identifier
1	Common	Blue or Black	C
2	Line	Red	R, Rc
3	No Connect		
4	No Connect		
5	Fan	Green	G
6	Cool	Yellow	Y
7	Heat	White	W
8	No Connect		

Thermostat Dimensions

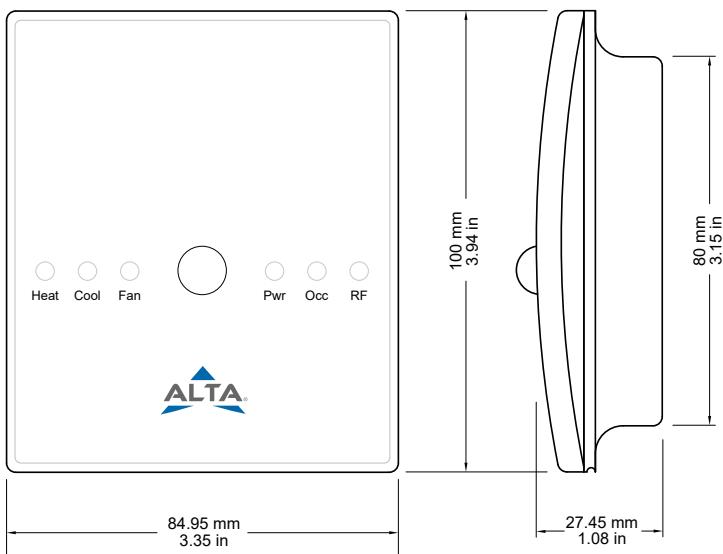

Motion Sensor Specifications

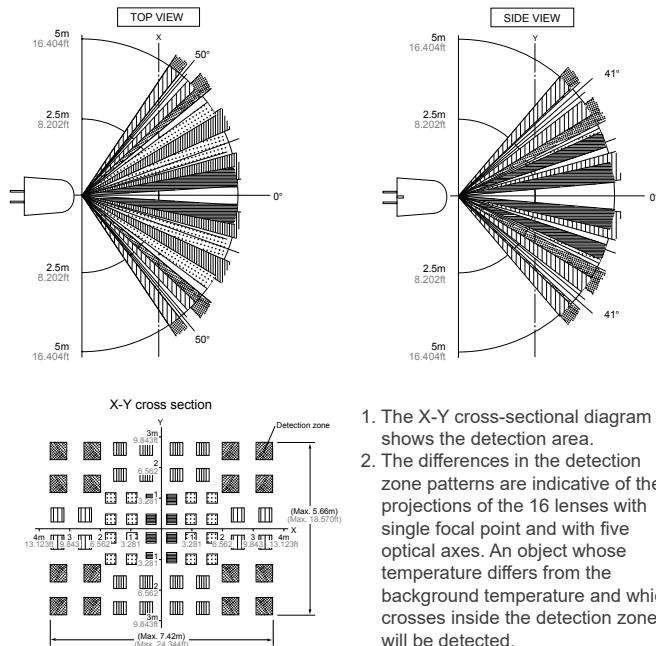

1. The X-Y cross-sectional diagram shows the detection area.
2. The differences in the detection zone patterns are indicative of the projections of the 16 lenses with single focal point and with five optical axes. An object whose temperature differs from the background temperature and which crosses inside the detection zone will be detected.

Caution / Notice:

Monnit commercial grade products are designed for applications in ordinary environments (normal room temperature, humidity and atmospheric pressure). Do not use these sensors under the following conditions as these factors can deteriorate the product characteristics and cause failures and burn-out.

- Corrosive gas or deoxidizing gas - chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas, nitric oxides gas, etc.)
- Volatile or flammable gas
- Dusty conditions
- Under low or high pressure
- Wet or excessively humid locations
- Places with salt water, oils chemical liquids or organic solvents
- Where there are excessively strong vibrations
- Other places where similar hazardous conditions exist

Use these products within the specified temperature range. Higher temperature may cause deterioration of the characteristics or the material quality of this product.

MONNIT[®]

For more information about our products or to place an order, please contact our sales department at 801-561-5555.

Visit us on the web at www.monnit.com.

Monnit Corporation
3400 South West Temple
South Salt Lake, UT 84115
801-561-5555
www.monnit.com

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9