


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

| DWG. NO. | ZONE | REV. | DESCRIPTION | DATE     | APPROV. |
|----------|------|------|-------------|----------|---------|
| X10-0X3  |      | F    | ECN 387     | 06/09/95 | C       |

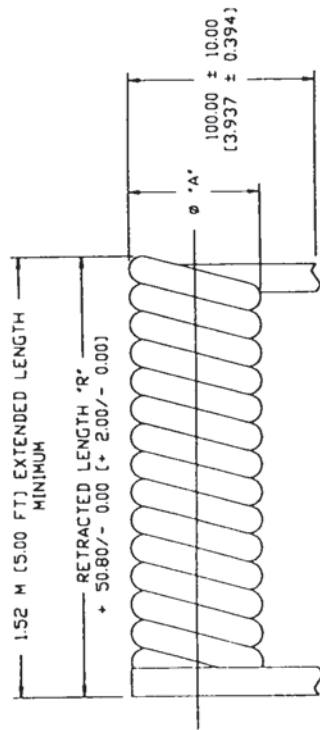

BUNDLE SPECIFICATION


- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1.0 PACKAGING SPECIFICATION
    - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
    - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

|                                                                                                                                  |             |                                                                                                |                                        |
|----------------------------------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------|----------------------------------------|
| 4                                                                                                                                | 431.80      | (17.000)                                                                                       | L=13.00" X W=20.00" X H=9.0            |
| 5                                                                                                                                | 457.20      | (18.000)                                                                                       | L=13.00" X W=20.00" X H=9.0            |
| 6                                                                                                                                | 558.80      | (22.000)                                                                                       | L=13.00" X W=25.00" X H=9.0            |
| CONDUCTORS<br>NUMBER OF                                                                                                          | MILLIMETERS | INCHES                                                                                         | DIMENSION MAX.<br>OUTSIDE SHIPPING BOX |
| TABULATION BLOCK                                                                                                                 |             |                                                                                                |                                        |
| THIRD ANGLE PROJECTION                                                                                                           |             |                                                                                                |                                        |
|                                                                                                                                  |             |                                                                                                |                                        |
| UNLESS OTHERWISE NOTED:<br>1) DIMENSIONS ARE IN MILLIMETER (INCHES)<br>2) TOLERANCES:<br>XX ± 0.20 (0.008)<br>XXX ± 0.35 (0.250) |             |                                                                                                |                                        |
| DR: GETH WYNN<br>E: 06/09/95                                                                                                     |             | TITLE: 26 AWG (12/0.12 mm) BARE COPP<br>500 FT. EXTENDED, NON-UL,<br>UNSHIELDED, MODULAR CABLE |                                        |
| CHKD: [Signature]                                                                                                                |             | PART NO: 121-X10-0X3                                                                           |                                        |
| CHKD: [Signature]                                                                                                                |             | CUSTOMER: I/O INTERCONNECT                                                                     |                                        |
| CHKD: [Signature]                                                                                                                |             | SCALE: NONE                                                                                    |                                        |
|                                                                                                                                  |             | SHEET 2 OF 2                                                                                   |                                        |

A B C D E F G H

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

| DWG. NO. | ZONE | REV. | DESCRIPTION | DATE     | APPROV. |
|----------|------|------|-------------|----------|---------|
| X10-0X2  |      | I    | ECN 387     | 06/09/95 | CT      |

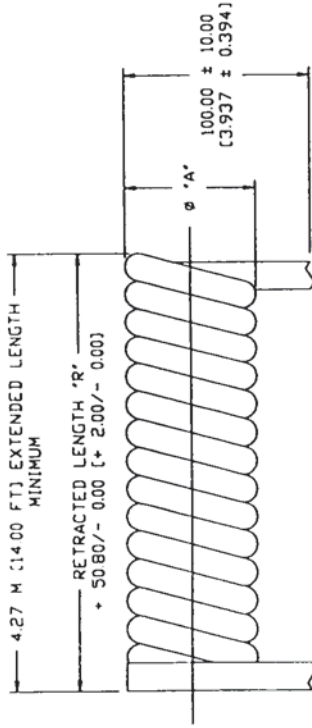

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

|            |                      |          |                              |
|------------|----------------------|----------|------------------------------|
| 4          | 863.60               | [34.000] | L=13.00' X W=40.00' X H=9.00 |
| 6          | 1117.60              | [44.000] | L=13.00' X W=50.00' X H=9.00 |
| 8          | 1270.00              | [50.000] | L=13.00' X W=55.00' X H=9.00 |
| CONDUCTORS | MILLIMETERS          | INCHES   | DIMENSION MAX                |
| NUMBER OF  | RETRACTED LENGTH "R" |          | OUTSIDE SHIPPING BOX         |

TABULATION BLOCK


|                                           |                           |                                |
|-------------------------------------------|---------------------------|--------------------------------|
| THIRD ANGLE PROJECTION                    |                           |                                |
| I/O INTERCONNECT<br>SANTA ANA, CALIFORNIA |                           |                                |
| DR: C. WANG                               | TITLE: 06/09/95           | 36 AWG (12/012 MM) BARE COPPER |
| CHKD: [Signature]                         | 14.00 FT EXTENDED, NON-UL | UNSHIELDED, MODULAR CABLE      |
| CHKD: [Signature]                         | PART NO: 121-X10-0X2      |                                |
| CHKD: [Signature]                         | CUSTOMER: I/O             | INTERCONNECT                   |
| CHKD: [Signature]                         | SCALE: NONE               | SHEET 2 OF 2                   |

6/10/95



THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

| DWG. NO. | ZONE / REV. | DESCRIPTION | DATE     | APPROV. |
|----------|-------------|-------------|----------|---------|
| X10-0X0  | D           | ECN 387     | 06/09/95 | G.T.    |

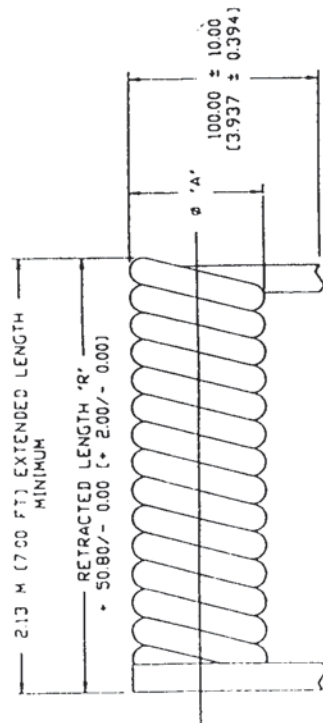

# BUNDLE SPECIFICATION



NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES


WITH TAPE

|            |                      |          |                               |
|------------|----------------------|----------|-------------------------------|
| 4          | 533.40               | (21.000) | L=13.00" X W=25.00" X H=9.00" |
| 6          | 609.60               | (24.000) | L=13.00" X W=25.00" X H=9.00" |
| 8          | 711.20               | (28.000) | L=13.00" X W=30.00" X H=9.00" |
| CONDUCTORS | MILLIMETERS          | INCHES   | DIMENSION MAX.                |
| NUMBER OF  | RETRACTED LENGTH "R" |          | OUTSIDE SHIPPING BOX          |

## TABULATION BLOCK

|                                                                                                                      |                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| <b>I/O INTERCONNECT</b><br>26 AVG (12/0.12 mm) BARE COPPER<br>7.00 FT. EXTENDED, NON-UL<br>UNSHIELDED, MODULAR CABLE |                                                                                                                                      |
| DR: CAVI<br>C. VAG<br>CHKD: <i>Valley</i>                                                                            | TITLE: SANTA ANA, CALIFORNIA<br>DATE: 06/09/95<br>PART NO: 121-X10-0X0<br>CUSTOMER: I/O INTERCONNECT<br>SCALE: NONE<br>SHEET: 2 OF 2 |

## THIRD ANGLE PROJECTION



UNLESS OTHERWISE NOTED:

1) DIMENSIONS ARE IN MILLIMETER (INCHES)

2) TOLERANCES:


XX ± 0.20 (0.008)

X.XX ± 6.35 (0.250)







THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. USA, AND SHALL BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

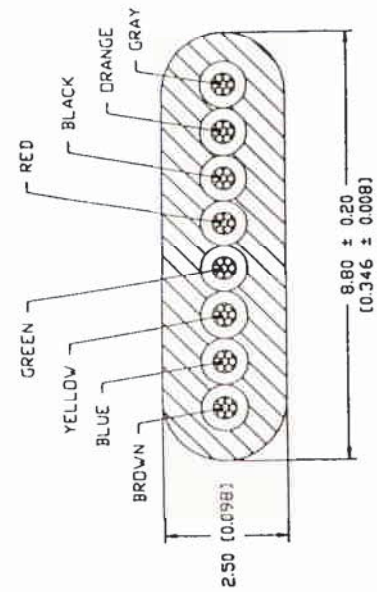

8 CONDUCTOR CABLE

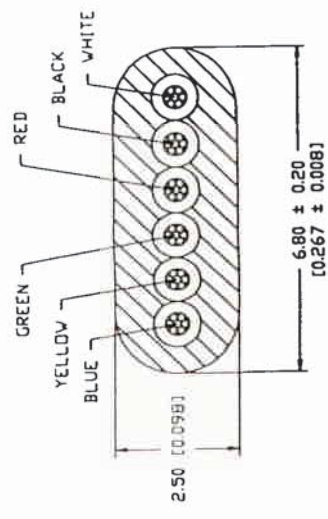

6 CONDUCTOR CABLE

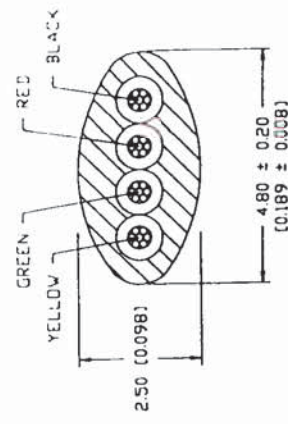

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
  - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
  - 1.02 INSULATION: POLYPROPYLENE
  - 1.03 COLOR: PER CALLOUT
  - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
  - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
  - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
  - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
  - 2.04 CAPACITANCE: 15 PF/FT (MAX)
  - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

|                              |                      |              |              |             |
|------------------------------|----------------------|--------------|--------------|-------------|
| 121-410-003                  | 4                    | SILVER SATIN | [0.55] ± 0.0 | 14.00 ± 1.0 |
| 121-410-013                  | 4                    | BLACK        | [0.55] ± 0.0 | 14.00 ± 1.0 |
| 121-410-023                  | 4                    | WHITE        | [0.55] ± 0.0 | 14.00 ± 1.0 |
| 121-610-003                  | 6                    | SILVER SATIN | [0.55] ± 0.0 | 14.00 ± 1.0 |
| 121-610-013                  | 6                    | BLACK        | [0.55] ± 0.0 | 14.00 ± 1.0 |
| 121-610-023                  | 6                    | WHITE        | [0.55] ± 0.0 | 14.00 ± 1.0 |
| 121-810-003                  | 8                    | SILVER SATIN | [0.748 ± 0.0 | 19.00 ± 1.0 |
| 121-810-013                  | 8                    | BLACK        | [0.748 ± 0.0 | 19.00 ± 1.0 |
| 121-810-023                  | 8                    | WHITE        | [0.748 ± 0.0 | 19.00 ± 1.0 |
| I/O INTERCONNECT PART NUMBER | NUMBER OF CONDUCTORS | COLOR        | Ø "A"        |             |

**THIRD ANGLE PROJECTION**

UNLESS OTHERWISE NOTED:  
1) DIMENSIONS ARE IN MILLIMETER (INCHES)  
2) TOLERANCES:  
XX ± 0.20 (0.008)  
XXX ± 6.35 (0.250)

**I/O INTERCONNECT**  
SANTA ANA, CALIFORNIA

DR: CATH WONG TITLE: 26 AWG (12/012 mm) BARE COPPER  
C. WONG 06/09/95 500 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE

CHKD: *Karl Berg* PART NO: 121-X10-0X3  
CHKD: *[Signature]* CUSTOMER: I/O INTERCONNECT  
CHKD: *[Signature]* SCALE: NONE SHEET 1 OF 1


| DATE    | REV. | DESCRIPTION | DATE     | APPROVED |
|---------|------|-------------|----------|----------|
| 010-013 | G    | CON BCS     | 07/15/78 | RJ       |

| DATE    | REV. | DESCRIPTION | DATE     | APPROVED |
|---------|------|-------------|----------|----------|
| 010-013 | G    | CON BCS     | 07/15/78 | RJ       |

| DATE    | REV. | DESCRIPTION | DATE     | APPROVED |
|---------|------|-------------|----------|----------|
| 010-013 | G    | CON BCS     | 07/15/78 | RJ       |

| DATE    | REV. | DESCRIPTION | DATE     | APPROVED |
|---------|------|-------------|----------|----------|
| 010-013 | G    | CON BCS     | 07/15/78 | RJ       |

THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PARTS OR SUBASSEMBLY COPIES OR REPRODUCTION IN ANY FORM OR BY ANY MEANS IS PERMITTED WITHOUT THE WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

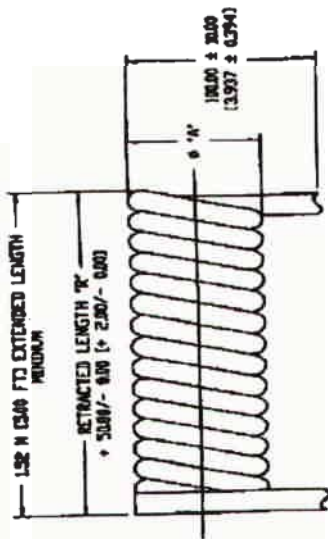

BUNDLE SPECIFICATION

# NOTES: UNLESS OTHERWISE SPECIFIED

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.1 CONDUCTORS: 26 AWG (0.2/0.12 mm) STANNED BARE COPPER
- 1.2 INSULATION: POLYPROPYLENE
- 1.3 COLOR: PER CALLOUT
- 1.4 PACKAGING: SEE PAGE 2
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.1 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.2 CONDUCTORS RESISTANCE: 140 OHMS/KM MAX AT 20°C
- 2.3 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN AT 20°C
- 2.4 CAPACITANCE: 15 PF/FT (450)
- 2.5 DIELECTRIC TEST: AC-500V PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.1 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
- 3.2 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

| CONDUCTORS NUMBER OF | MILLIMETERS | RETRACTED LENGTH "IN" | INCHES                        |
|----------------------|-------------|-----------------------|-------------------------------|
| 4                    | 431.00      | (17.000)              | L=13.00" X V=28.00" X H=9.00" |
| 6                    | 457.20      | (18.000)              | L=13.00" X V=28.00" X H=9.00" |
| 8                    | 508.00      | (20.000)              | L=13.00" X V=28.00" X H=9.00" |
| 10                   | 609.60      | (24.000)              | L=13.00" X V=28.00" X H=9.00" |

CONDUCTORS NUMBER OF

RETRACTED LENGTH "IN"

INCHES

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX


OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX

OUTSIDE SHIPPING BOX



I/O INTERCONNECT

SANTA ANA, CALIFORNIA

26 AWG (0.2/0.12 mm) BARE COPPER

500 FT EXTENDED, NON-IL

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE


UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE

UNSHIELDED, MEDIUM CABLE



UNLESS OTHERWISE NOTED

1) DIMENSIONS ARE IN

2) TOLERANCES

XX ± 0.20 (0.008)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)

XXX ± 0.25 (0.010)







## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9