


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X3		F	ECN 387	06/09/95	C

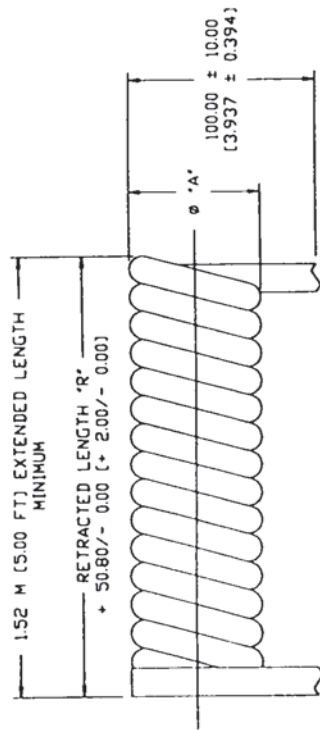

BUNDLE SPECIFICATION


NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 PACKAGING SPECIFICATION
 - 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
 - 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	431.80	(17.000)	L=13.00" X W=20.00" X H=9.0
5	457.20	(18.000)	L=13.00" X W=20.00" X H=9.0
6	558.80	(22.000)	L=13.00" X W=25.00" X H=9.0
CONDUCTORS NUMBER OF	MILLIMETERS	INCHES	DIMENSION MAX.
	RETRACTED LENGTH 'R'		OUTSIDE SHIPPING BOX
TABULATION BLOCK			
THIRD ANGLE PROJECTION		I/O INTERCONNECT	
		SANTA ANA, CALIFORNIA	
UNLESS OTHERWISE NOTED: 1) DIMENSIONS ARE IN MILLIMETER (INCHES) 2) TOLERANCES: XX ± 0.20 (0.008) XXX ± 0.35 (0.250)		DR: GAYN WYNN E: 06/09/95 TITLE: 26 AWG (12/0.12 mm) BARE COPP 500 FT. EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE	
CHKD: [Signature]		PART NO: 121-X10-0X3	
CHKD: [Signature]		CUSTOMER: I/O INTERCONNECT	
CHKD: [Signature]		SCALE: NONE	
CHKD: [Signature]		SHEET 2 OF 2	

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE	REV.	DESCRIPTION	DATE	APPROV.
X10-0X2		I	ECN 387	06/09/95	C.T.

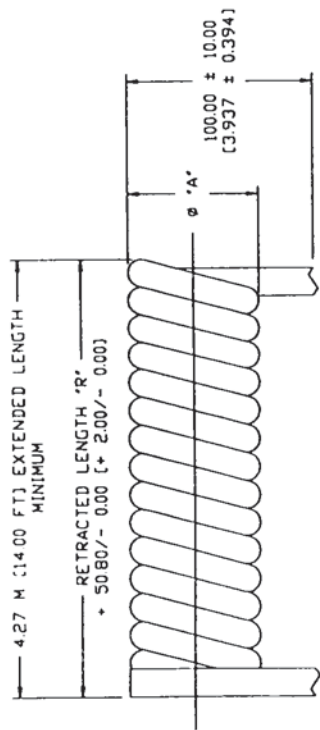

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

- 1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.
- 1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE.

4	863.60	[34.000]	L=13.00' X W=40.00' X H=9.00
6	1117.60	[44.000]	L=13.00' X W=50.00' X H=9.00
8	1270.00	[50.000]	L=13.00' X W=55.00' X H=9.00
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX
NUMBER OF	RETRACTED LENGTH "R"	INCHES	OUTSIDE SHIPPING BOX

TABULATION BLOCK

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 0.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: C. WANG
C. WANG
06/09/95

TITLE: 35 AWG (12/012 MM) BARE COPPER 14.00 FT EXTENDED, NON-UL, UNSHIELDED, MODULAR CABLE

CHKD: [Signature]
PART NO: 121-X10-0X2


CUSTOMER: I/O INTERCONNECT

SCALE: NONE SHEET 2 OF 2

6/10/95

THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT, INC. USA AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT, INC. OR ITS AFFILIATED SUBSIDIARIES.

DWG. NO.	ZONE / REV.	DESCRIPTION	DATE	APPROV.
X10-0X0	D	ECN 387	06/09/95	G.T.

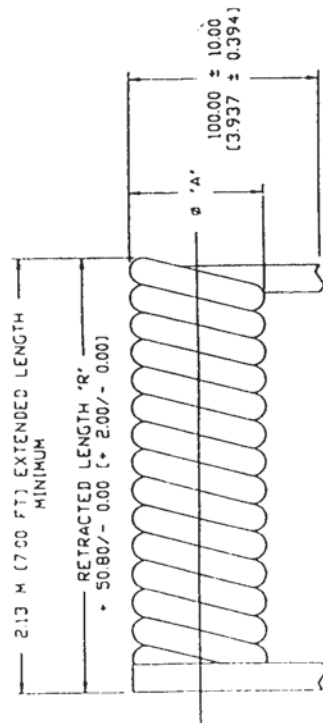

BUNDLE SPECIFICATION

NOTES UNLESS OTHERWISE SPECIFIED.

1.0 PACKAGING SPECIFICATION

1.01 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION.

1.02 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY

10 BUNDLE OR 250 PIECES MAX. PER SHIPPING BOX.

CLOSE PLASTIC BAG AND SEAL BAG ALONG 3 SURFACES

WITH TAPE




4	533.40	(21.000)	L=13.00" X W=25.00" X H=9.00"
6	609.60	(24.000)	L=13.00" X W=25.00" X H=9.00"
8	711.20	(28.000)	L=13.00" X W=30.00" X H=9.00"
CONDUCTORS	MILLIMETERS	INCHES	DIMENSION MAX.
NUMBER OF	RETRACTED LENGTH "R"		OUTSIDE SHIPPING BOX

TABULATION BLOCK

I/O INTERCONNECT 26 AVG (12/0.12 mm) BARE COPPER 7.00 FT. EXTENDED, NON-UL UNSHIELDED, MODULAR CABLE	
DR: CAVI C. VAG CHKD: <i>Valley</i>	TITLE: SANTA ANA, CALIFORNIA DATE: 06/09/95 PART NO: 121-X10-0X0 CUSTOMER: I/O INTERCONNECT SCALE: NONE SHEET: 2 OF 2

THIRD ANGLE PROJECTION



UNLESS OTHERWISE NOTED:


1) DIMENSIONS ARE IN MILLIMETER (INCHES)

2) TOLERANCES:


XX ± 0.20 (0.008)

X.XX ± 6.35 (0.250)


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. USA, AND SHALL BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

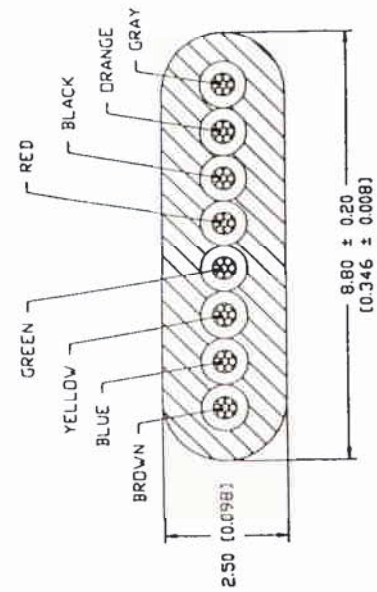

8 CONDUCTOR CABLE

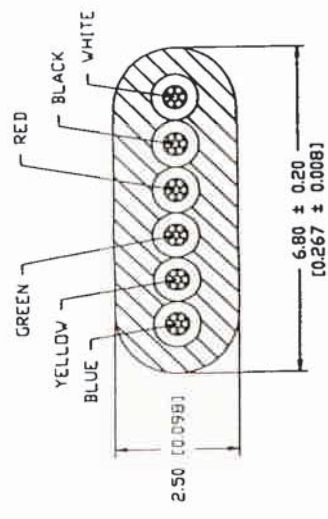

6 CONDUCTOR CABLE

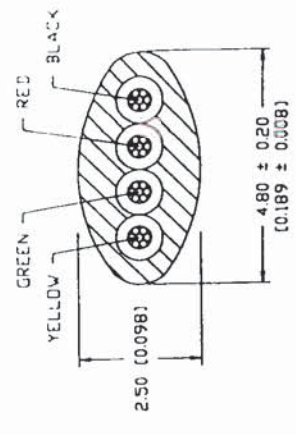

4 CONDUCTOR CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1.0 MATERIAL AND SPECIFICATIONS
 - 1.01 CONDUCTORS: 26 AWG (12/012 mm) STRANDED BARE COPPER.
 - 1.02 INSULATION: POLYPROPYLENE
 - 1.03 COLOR: PER CALLOUT
 - 1.04 PACKAGING: (SEE PAGE 2)
- 2.0 ELECTRICAL CHARACTERISTICS
 - 2.01 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
 - 2.02 CONDUCTORS RESISTANCE: 148 OHMS/KM MAX. AT 20°C
 - 2.03 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN. AT 20°C
 - 2.04 CAPACITANCE: 15 PF/FT (MAX)
 - 2.05 DIELECTRIC TEST: AC-500V PER 1 MINUTE

121-410-003	4	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-410-013	4	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-410-023	4	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-610-003	6	SILVER SATIN	[0.55] ± 0.0	14.00 ± 1.0
121-610-013	6	BLACK	[0.55] ± 0.0	14.00 ± 1.0
121-610-023	6	WHITE	[0.55] ± 0.0	14.00 ± 1.0
121-810-003	8	SILVER SATIN	[0.748 ± 0.0	19.00 ± 1.0
121-810-013	8	BLACK	[0.748 ± 0.0	19.00 ± 1.0
121-810-023	8	WHITE	[0.748 ± 0.0	19.00 ± 1.0
I/O INTERCONNECT PART NUMBER	NUMBER OF CONDUCTORS	COLOR	Ø "A"	

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN MILLIMETER (INCHES)
2) TOLERANCES:
XX ± 0.20 (0.008)
XXX ± 6.35 (0.250)

I/O INTERCONNECT
SANTA ANA, CALIFORNIA

DR: *Keith Wynn* TITLE: 26 AWG (12/012 mm) BARE COPP
C. WNG 06/09/95 5.00 FT EXTENDED, NON-UL,
UNSHIELDED, MODULAR CABLE

CHKD: *Karl Berg* PART NO: 121-X10-0X3
CHKD: *[Signature]* CUSTOMER: I/O
CHKD: *[Signature]* INTERCONNECT
CHKD: *[Signature]* SCALE: NONE SHEET 1 OF 1


DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

DATE	REV.	DESCRIPTION	DATE	APPROVED
010-013	G	CON BCS	07/15/78	RJ

THESE DIMENSIONS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. NO PARTS OR SUBASSEMBLIES MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF I/O INTERCONNECT INC. OR ITS APPLICABLE SUBSIDIARIES.

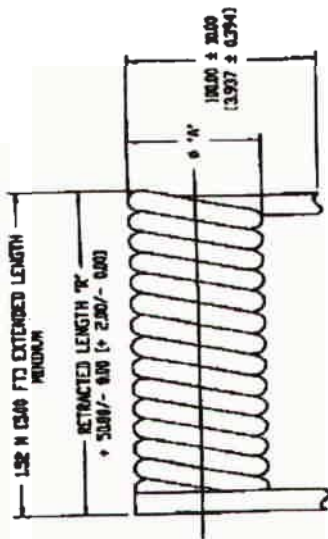

BUNDLE SPECIFICATION

NOTES: UNLESS OTHERWISE SPECIFIED

- 1.0 MATERIAL AND SPECIFICATIONS
- 1.1 CONDUCTORS: 26 AWG (0.2/0.12 mm) STANNED BARE COPPER
- 1.2 INSULATION: POLYPROPYLENE
- 1.3 COLOR: PER CALLOUT
- 1.4 PACKAGING: SEE PAGE 2
- 2.0 ELECTRICAL CHARACTERISTICS
- 2.1 TEMPERATURE & VOLTAGE RATING: 80°C 30 V
- 2.2 CONDUCTORS RESISTANCE: 140 OHMS/KM MAX AT 20°C
- 2.3 INSULATION RESISTANCE: 100 MEGOHMS/KM MIN AT 20°C
- 2.4 CAPACITANCE: 15 PF/FT (500)
- 2.5 DIELECTRIC TEST: AC-500V PER 1 MINUTE
- 3.0 PACKAGING SPECIFICATION
- 3.1 USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION
- 3.2 PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE

CONDUCTORS NUMBER OF	MILLIMETERS	INCHES	RETRACTED LENGTH "IN"	THIRD ANGLE PROJECTION
4	431.00	(17.000)	L=13.00" X V=28.00" X H=9.00"	
6	457.20	(18.000)	L=13.00" X V=28.00" X H=9.00"	
8	508.00	(20.000)	L=13.00" X V=28.00" X H=9.00"	
10	609.60	(24.000)	L=13.00" X V=28.00" X H=9.00"	

FABRICATION BLOCK		I/O INTERCONNECT	
SANTA ANA, CALIFORNIA		SANTA ANA, CALIFORNIA	
26 AWG (0.2/0.12 mm) STANNED BARE COPPER		26 AWG (0.2/0.12 mm) STANNED BARE COPPER	
140 OHMS/KM MAX AT 20°C		140 OHMS/KM MAX AT 20°C	
100 MEGOHMS/KM MIN AT 20°C		100 MEGOHMS/KM MIN AT 20°C	
15 PF/FT (500)		15 PF/FT (500)	
AC-500V PER 1 MINUTE		AC-500V PER 1 MINUTE	
USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION		USE CLEAR TAPE TO BUNDLE 25 CABLES TOGETHER AT THE MID SECTION	
PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE		PLACE PLASTIC BAG IN SHIPPING BOX AND LAY 10 BUNDLE OR 250 PILES MAX PER SHIPPING BOX. CLOSE PLASTIC BAG AND SEAL BOX ALONG 3 SURFACES WITH TAPE	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9