

## Improved Quad SPST CMOS Analog Switches

### DESCRIPTION

The DG444B, DG445B are monolithic quad analog switches designed to provide high speed, low error switching of analog and audio signals. The DG444B, DG445B are upgrades to the original DG444, DG445.

Combining low on-resistance (45  $\Omega$ , typ.) with high speed ( $t_{ON}$  120 ns, typ.), the DG444B, DG445B are ideally suited for Data Acquisition, Communication Systems, Automatic Test Equipment, or Medical Instrumentation. Charge injection has been minimized on the drain for use in sample-and-hold circuits.

The DG444B, DG445B are built using Vishay Siliconix's high-voltage silicon-gate process. An epitaxial layer prevents latchup.

When on, each switch conducts equally well in both directions and blocks input voltages to the supply levels when off.

### FEATURES

- **Halogen-free according to IEC 61249-2-21 Definition**
- Low On-Resistance: 45  $\Omega$
- Low Power Consumption: 1 mW
- Fast Switching Action -  $t_{ON}$ : 120 ns
- Low Charge Injection
- TTL/CMOS-Compatible Logic
- **Compliant to RoHS Directive 2002/95/EC**



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**



### BENEFITS

- Low Signal Errors and Distortion
- Reduced Power Supply Consumption
- Faster Throughput
- Reduced Pedestal Errors
- Simple Interfacing

### APPLICATIONS

- Audio Switching
- Data Acquisition
- Sample-and-Hold Circuits
- Communication Systems
- Automatic Test Equipment
- Medical Instruments

### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

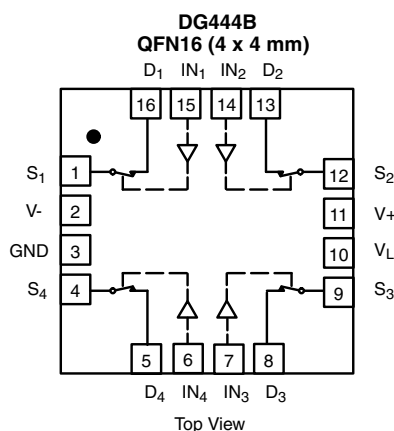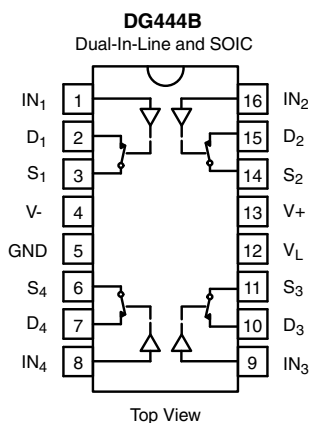

### TRUTH TABLE

| Logic | DG444B | DG445B |
|-------|--------|--------|
| 0     | ON     | OFF    |
| 1     | OFF    | ON     |

Logic "0"  $\leq 0.8$  V

Logic "1"  $\geq 2.4$  V

### ORDERING INFORMATION

| Temp Range       | Package             | Part Number    |
|------------------|---------------------|----------------|
| - 40 °C to 85 °C | 16-pin Plastic DIP  | DG444BDJ       |
|                  |                     | DG444BDJ-E3    |
|                  |                     | DG445BDJ       |
|                  |                     | DG445BDJ-E3    |
|                  | 16-pin Narrow SOIC  | DG444BDY-E3    |
|                  |                     | DG444BDY-T1-E3 |
|                  |                     | DG445BDY-E3    |
|                  |                     | DG445BDY-T1-E3 |
|                  | 16 pin QFN 4 x 4 mm | DG444BDN-T1-E4 |
|                  |                     | DG445BDN-T1-E4 |

| <b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise noted) |                                      |                                                          |                    |
|------------------------------------------------------------------------------------------------|--------------------------------------|----------------------------------------------------------|--------------------|
| Parameter                                                                                      | Symbol                               | Limit                                                    | Unit               |
| V+ to V-                                                                                       |                                      | 44                                                       | V                  |
| GND to V-                                                                                      |                                      | 25                                                       |                    |
| $V_L$                                                                                          |                                      | (GND - 0.3 V) to (V+) + 0.3 V                            |                    |
| Digital Inputs <sup>a</sup> , $V_S$ , $V_D$                                                    |                                      | (V-) - 2 to (V+) + 2 or<br>30 mA, whichever occurs first |                    |
| Continuous Current (Any Terminal)                                                              |                                      | 30                                                       | mA                 |
| Current, S or D (Pulsed at 1 ms, 10 % duty cycle)                                              |                                      | 100                                                      |                    |
| Storage Temperature                                                                            |                                      | - 65 to 125                                              | $^{\circ}\text{C}$ |
| Power Dissipation (Package) <sup>b</sup>                                                       | 16-pin Plastic DIP <sup>c</sup>      | 470                                                      | mW                 |
|                                                                                                | 16-pin Narrow Body SOIC <sup>d</sup> | 640                                                      |                    |
|                                                                                                | QFN-16                               | 850                                                      |                    |

Notes:

a. Signals on  $S_X$ ,  $D_X$ , or  $IN_X$  exceeding V+ or V- will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC Board.

c. Derate 6 mW/ $^{\circ}\text{C}$  above 75  $^{\circ}\text{C}$ .

d. Derate 8 mW/ $^{\circ}\text{C}$  above 75  $^{\circ}\text{C}$ .



| SPECIFICATIONS (for dual supplies)          |                     |                                                                                                                                                                      |                    |                            |                   |                   |      |
|---------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|-------------------|-------------------|------|
| Parameter                                   | Symbol              | Test Conditions<br>Unless Otherwise Specified<br>V <sub>+</sub> = 15 V, V <sub>-</sub> = - 15 V<br>V <sub>L</sub> = 5 V, V <sub>IN</sub> = 2.4 V, 0.8 V <sup>e</sup> | Temp. <sup>a</sup> | Limits<br>- 40 °C to 85 °C |                   |                   | Unit |
|                                             |                     |                                                                                                                                                                      |                    | Min. <sup>b</sup>          | Typ. <sup>c</sup> | Max. <sup>b</sup> |      |
| Analog Switch                               |                     |                                                                                                                                                                      |                    |                            |                   |                   |      |
| Analog Signal Range <sup>d</sup>            | V <sub>ANALOG</sub> |                                                                                                                                                                      | Full               | - 15                       |                   | 15                | V    |
| Drain-Source On-Resistance                  | R <sub>DS(on)</sub> | I <sub>S</sub> = 1 mA, V <sub>D</sub> = ± 10 V                                                                                                                       | Room Full          |                            | 45                | 80<br>95          | Ω    |
| Switch Off Leakage Current                  | I <sub>S(off)</sub> | V <sub>D</sub> = ± 14 V, V <sub>S</sub> = ± 14 V                                                                                                                     | Room Full          | - 0.5<br>- 5               | ± 0.01            | 0.5<br>5          | nA   |
|                                             | I <sub>D(off)</sub> |                                                                                                                                                                      | Room Full          | - 0.5<br>- 5               | ± 0.01            | 0.5<br>5          |      |
| Channel On Leakage Current                  | I <sub>D(on)</sub>  | V <sub>S</sub> = V <sub>D</sub> = ± 14 V                                                                                                                             | Room Full          | - 0.5<br>- 10              | ± 0.02            | 0.5<br>10         |      |
| Digital Control                             |                     |                                                                                                                                                                      |                    |                            |                   |                   |      |
| Input Voltage Low                           | V <sub>INL</sub>    |                                                                                                                                                                      | Full               |                            |                   | 0.8               | V    |
| Input Voltage High                          | V <sub>INH</sub>    |                                                                                                                                                                      | Full               | 2.4                        |                   |                   |      |
| Input Current V <sub>IN</sub> Low           | I <sub>INL</sub>    | V <sub>IN</sub> under test = 0.8 V<br>All Other = 2.4 V                                                                                                              | Full               | - 1                        | - 0.01            | 1                 | μA   |
| Input Current V <sub>IN</sub> High          | I <sub>INH</sub>    | V <sub>IN</sub> under test = 2.4 V<br>All Other = 0.8 V                                                                                                              | Full               | - 1                        | 0.01              | 1                 |      |
| Dynamic Characteristics                     |                     |                                                                                                                                                                      |                    |                            |                   |                   |      |
| Turn-On Time                                | t <sub>ON</sub>     | R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF<br>V <sub>S</sub> = ± 10 V, See Figure 2                                                                               | Room               |                            |                   | 300               | ns   |
| Turn-Off Time                               | t <sub>OFF</sub>    |                                                                                                                                                                      | Room               |                            |                   | 200               |      |
| Charge Injection <sup>e</sup>               | Q                   | C <sub>L</sub> = 1 nF, V <sub>S</sub> = 0 V<br>V <sub>gen</sub> = 0 V, R <sub>gen</sub> = 0 Ω                                                                        | Room               |                            | 1                 |                   | pC   |
| Off Isolation <sup>e</sup>                  | OIRR                | R <sub>L</sub> = 50 Ω , C <sub>L</sub> = 15 pF<br>V <sub>S</sub> = 1 V <sub>RMS</sub> , f = 100 kHz                                                                  | Room               |                            | - 90              |                   | dB   |
| Crosstalk (Channel-to-Channel) <sup>d</sup> | X <sub>TALK</sub>   |                                                                                                                                                                      | Room               |                            | - 95              |                   |      |
| Source Off Capacitance                      | C <sub>S(off)</sub> | V <sub>S</sub> = 0 V, f = 100 kHz                                                                                                                                    | Room               |                            | 5                 |                   | pF   |
| Drain Off Capacitance                       | C <sub>D(off)</sub> |                                                                                                                                                                      | Room               |                            | 5                 |                   |      |
| Channel On Capacitance                      | C <sub>D(on)</sub>  | V <sub>S</sub> = V <sub>D</sub> = 0 V, f = 1 MHz                                                                                                                     | Room               |                            | 16                |                   |      |
| Power Supplies                              |                     |                                                                                                                                                                      |                    |                            |                   |                   |      |
| Positive Supply Current                     | I <sub>+</sub>      | V <sub>IN</sub> = 0 V or 5 V                                                                                                                                         | Room Full          |                            |                   | 1<br>5            | μA   |
| Negative Supply Current                     | I <sub>-</sub>      |                                                                                                                                                                      | Room Full          | - 1<br>- 5                 |                   |                   |      |
| Logic Supply Current                        | I <sub>IN</sub>     |                                                                                                                                                                      | Room Full          |                            |                   | 1<br>5            |      |



**SPECIFICATIONS** (for unipolar supplies)






| Parameter                                  | Symbol              | Test Conditions<br>Unless Otherwise Specified<br>V <sub>+</sub> = 12 V, V <sub>-</sub> = 0 V<br>V <sub>L</sub> = 5 V, V <sub>IN</sub> = 2.4 V, 0.8 V <sup>e</sup> | Temp. <sup>a</sup> | D Suffix<br>- 40 °C to 85 °C |                   |                   | Unit |
|--------------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------|-------------------|-------------------|------|
|                                            |                     |                                                                                                                                                                   |                    | Min. <sup>b</sup>            | Typ. <sup>c</sup> | Max. <sup>b</sup> |      |
| Analog Switch                              |                     |                                                                                                                                                                   |                    |                              |                   |                   |      |
| Analog Signal Range <sup>d</sup>           | V <sub>ANALOG</sub> |                                                                                                                                                                   | Full               | 0                            |                   | 12                | V    |
| Drain-Source<br>On-Resistance <sup>d</sup> | R <sub>DS(on)</sub> | I <sub>S</sub> = 1 mA, V <sub>D</sub> = 3 V, 8 V                                                                                                                  | Room<br>Full       |                              | 90                | 160<br>200        | Ω    |
| Dynamic Characteristics                    |                     |                                                                                                                                                                   |                    |                              |                   |                   |      |
| Turn-On Time                               | t <sub>ON</sub>     | R <sub>L</sub> = 1 kΩ, C <sub>L</sub> = 35 pF, V <sub>S</sub> = 8 V<br>See Figure 2                                                                               | Room               |                              | 120               | 300               | ns   |
| Turn-Off Time                              | t <sub>OFF</sub>    |                                                                                                                                                                   | Room               |                              | 60                | 200               |      |
| Charge Injection                           | Q                   | C <sub>L</sub> = 1 nF, V <sub>gen</sub> = 6 V, R <sub>gen</sub> = 0 Ω                                                                                             | Room               |                              | 4                 |                   | pC   |
| Power Supplies                             |                     |                                                                                                                                                                   |                    |                              |                   |                   |      |
| Positive Supply Current                    | I <sub>+</sub>      | V <sub>IN</sub> = 0 or 5 V                                                                                                                                        | Room<br>Full       |                              |                   | 1<br>5            | μA   |
| Negative Supply Current                    | I <sub>-</sub>      |                                                                                                                                                                   | Room<br>Full       | - 1<br>- 5                   |                   |                   |      |
| Logic Supply Current                       | I <sub>IN</sub>     | V <sub>L</sub> = 5.25 V, V <sub>IN</sub> = 0 or 5 V                                                                                                               | Room<br>Full       |                              |                   | 1<br>5            |      |

Notes:

- a. Room = 25 °C, Full = as determined by the operating temperature suffix.  
b. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.  
c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.  
d. Guaranteed by design, not subject to production test.  
e.  $V_{IN}$  = input voltage to perform proper function.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

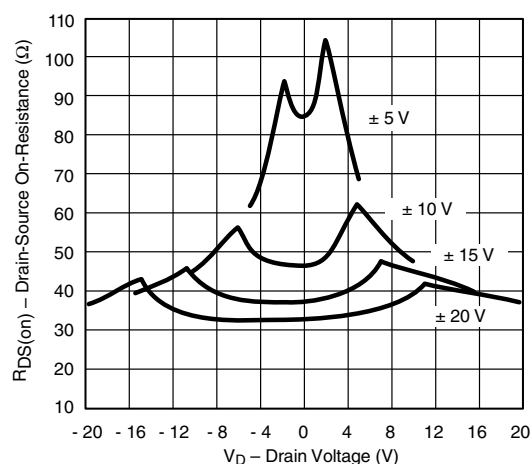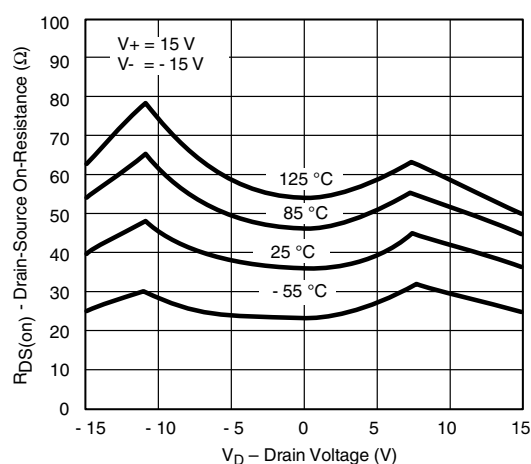**TYPICAL CHARACTERISTICS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted) $R_{DS(on)}$  vs.  $V_D$  and Power Supply Voltages $R_{DS(on)}$  vs.  $V_D$  and Temperature

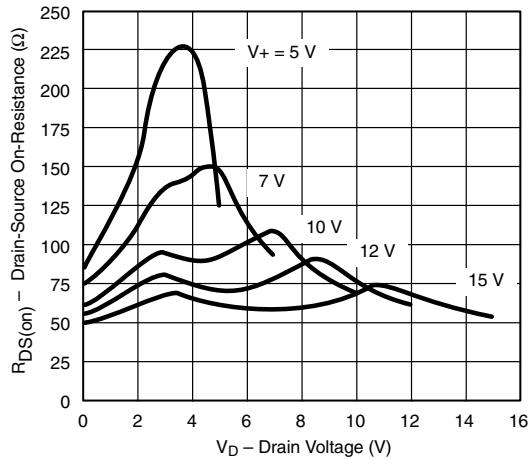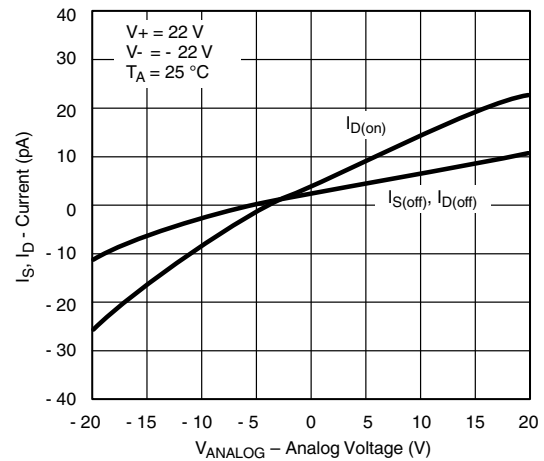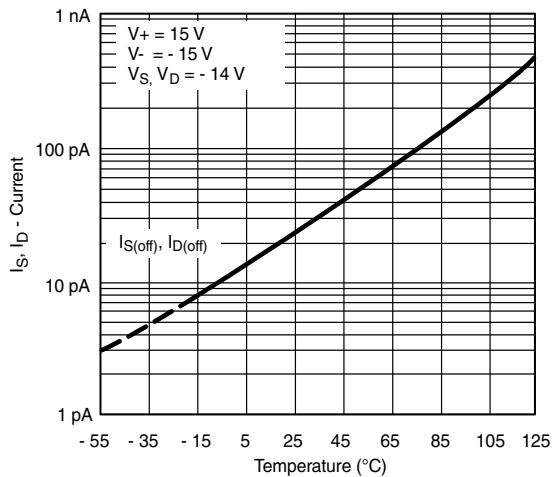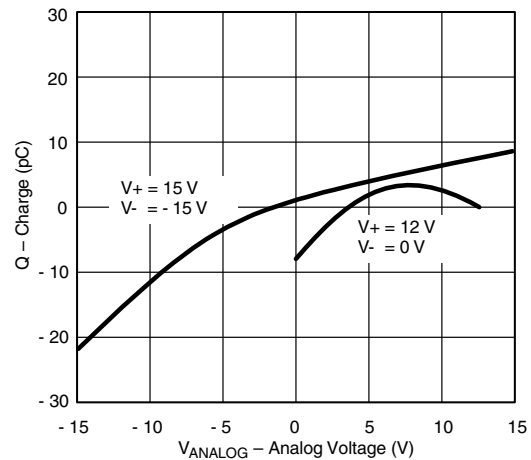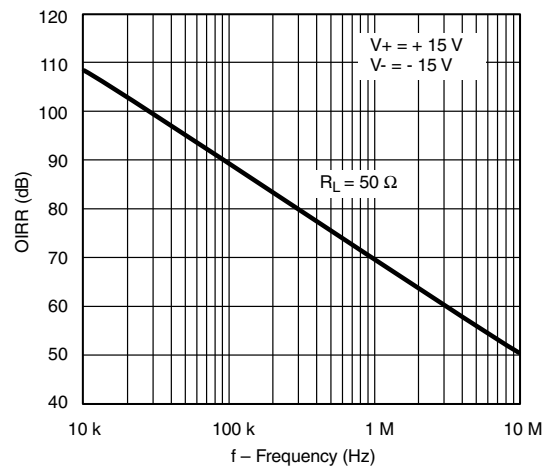**TYPICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ , unless otherwise noted) **$R_{DS(on)}$  vs.  $V_D$  and Single Power Supply Voltages****Leakage Currents vs. Analog Voltage****Leakage Current vs. Temperature** **$Q_S, Q_D$  - Charge Injection vs. Analog Voltage****Off Isolation vs. Frequency**

## SCHEMATIC DIAGRAM (typical channel)



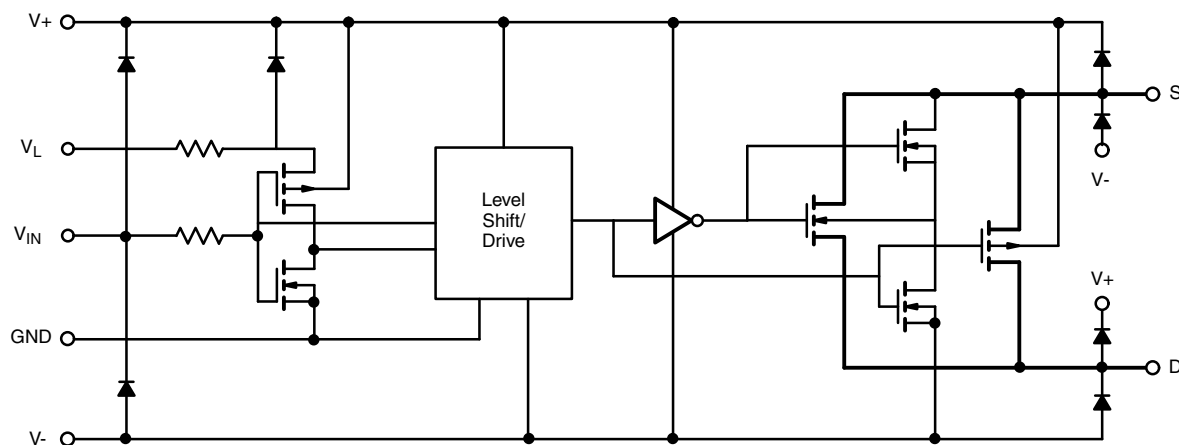


Figure 1.

## TEST CIRCUITS

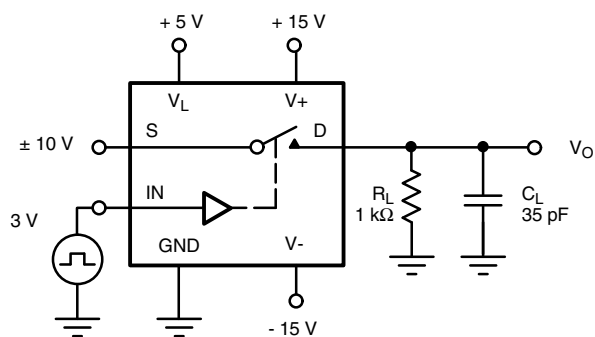

$C_L$  (includes fixture and stray capacitance)

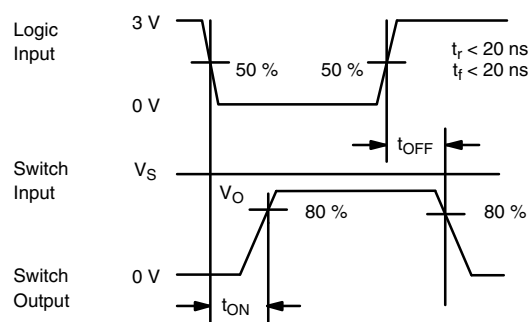

Note: Logic input waveform is inverted for DG445.

Figure 2. Switching Time

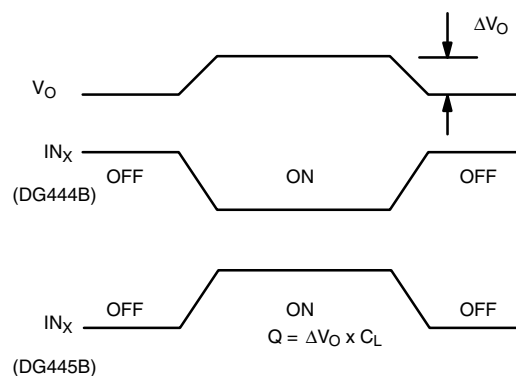
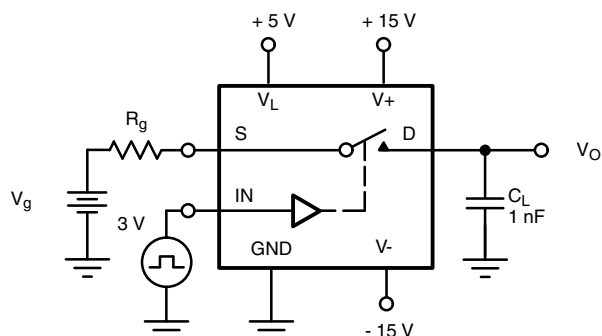


Figure 3. Charge Injection

## TEST CIRCUITS

C = 1 mF tantalum in parallel with 0.01 mF ceramic

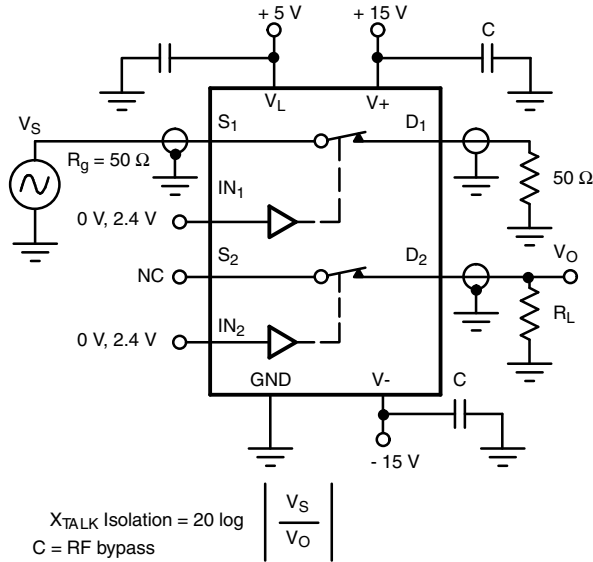


Figure 4. Crosstalk

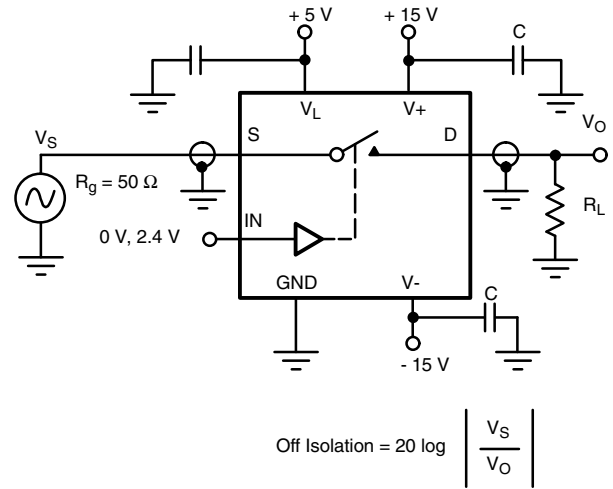


Figure 5. Off Isolation

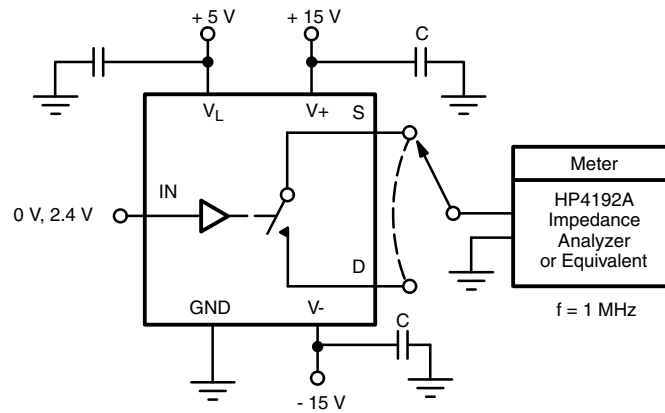


Figure 6. Source/Drain Capacitances

## APPLICATIONS

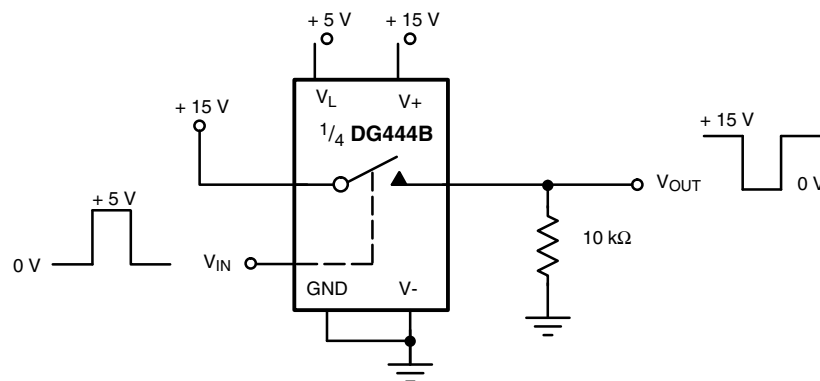


Figure 7. Level Shifter

### APPLICATIONS

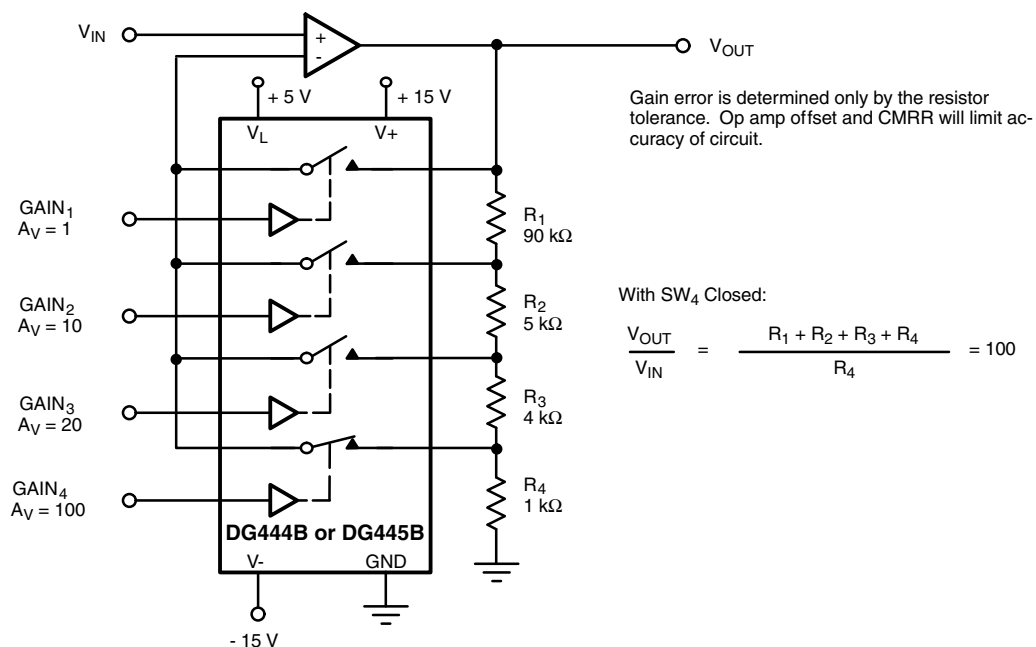


Figure 8. Precision-Weighted Resistor Programmable-Gain Amplifier


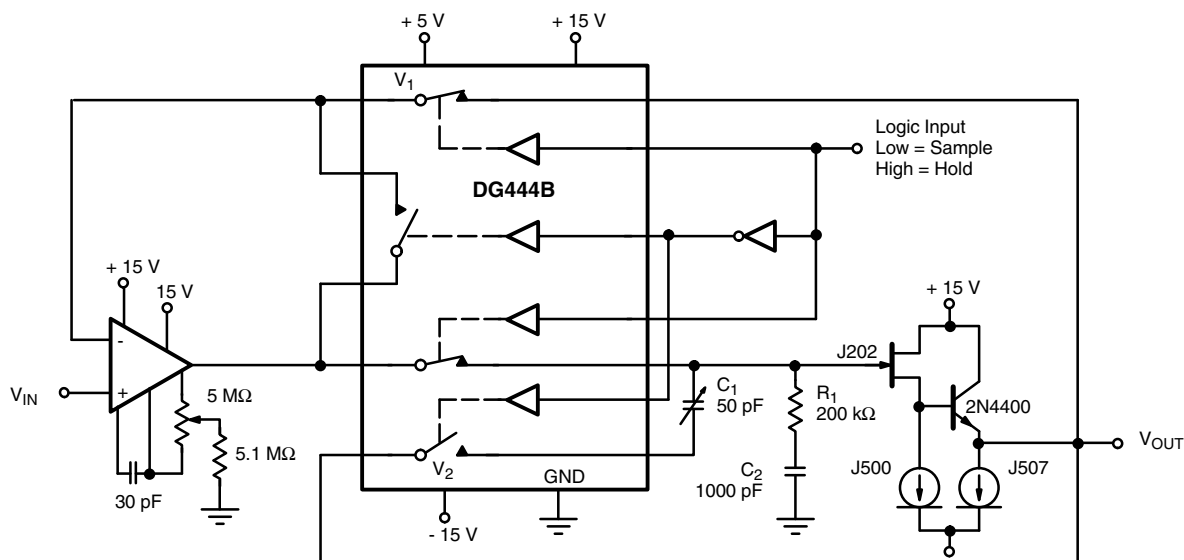


Figure 9. Precision Sample-and-Hold

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?72626](http://www.vishay.com/ppg?72626).

**JEDEC Part Number: MS-012**

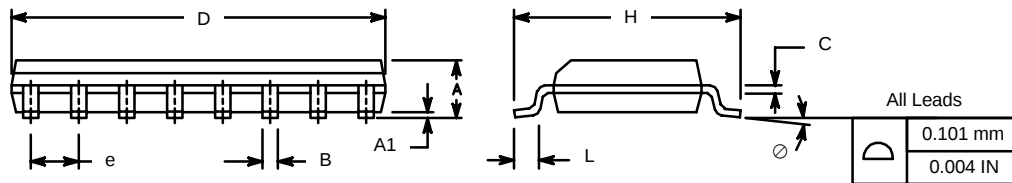

|                | MILLIMETERS |       | INCHES    |       |
|----------------|-------------|-------|-----------|-------|
| Dim            | Min         | Max   | Min       | Max   |
| A              | 1.35        | 1.75  | 0.053     | 0.069 |
| A <sub>1</sub> | 0.10        | 0.20  | 0.004     | 0.008 |
| B              | 0.38        | 0.51  | 0.015     | 0.020 |
| C              | 0.18        | 0.23  | 0.007     | 0.009 |
| D              | 9.80        | 10.00 | 0.385     | 0.393 |
| E              | 3.80        | 4.00  | 0.149     | 0.157 |
| e              | 1.27 BSC    |       | 0.050 BSC |       |
| H              | 5.80        | 6.20  | 0.228     | 0.244 |
| L              | 0.50        | 0.93  | 0.020     | 0.037 |
| ⌀              | 0°          | 8°    | 0°        | 8°    |

ECN: S-03946—Rev. F, 09-Jul-01  
DWG: 5300



**PDIP: 16-LEAD**




| Dim            | MILLIMETERS |       | INCHES |       |
|----------------|-------------|-------|--------|-------|
|                | Min         | Max   | Min    | Max   |
| A              | 3.81        | 5.08  | 0.150  | 0.200 |
| A <sub>1</sub> | 0.38        | 1.27  | 0.015  | 0.050 |
| B              | 0.38        | 0.51  | 0.015  | 0.020 |
| B <sub>1</sub> | 0.89        | 1.65  | 0.035  | 0.065 |
| C              | 0.20        | 0.30  | 0.008  | 0.012 |
| D              | 18.93       | 21.33 | 0.745  | 0.840 |
| E              | 7.62        | 8.26  | 0.300  | 0.325 |
| E <sub>1</sub> | 5.59        | 7.11  | 0.220  | 0.280 |
| e <sub>1</sub> | 2.29        | 2.79  | 0.090  | 0.110 |
| e <sub>A</sub> | 7.37        | 7.87  | 0.290  | 0.310 |
| L              | 2.79        | 3.81  | 0.110  | 0.150 |
| Q <sub>1</sub> | 1.27        | 2.03  | 0.050  | 0.080 |
| S              | 0.38        | 1.52  | .015   | 0.060 |

ECN: S-03946—Rev. D, 09-Jul-01  
DWG: 5482



**QFN-16 (4 × 4 mm)**

JEDEC Part Number: MO-220

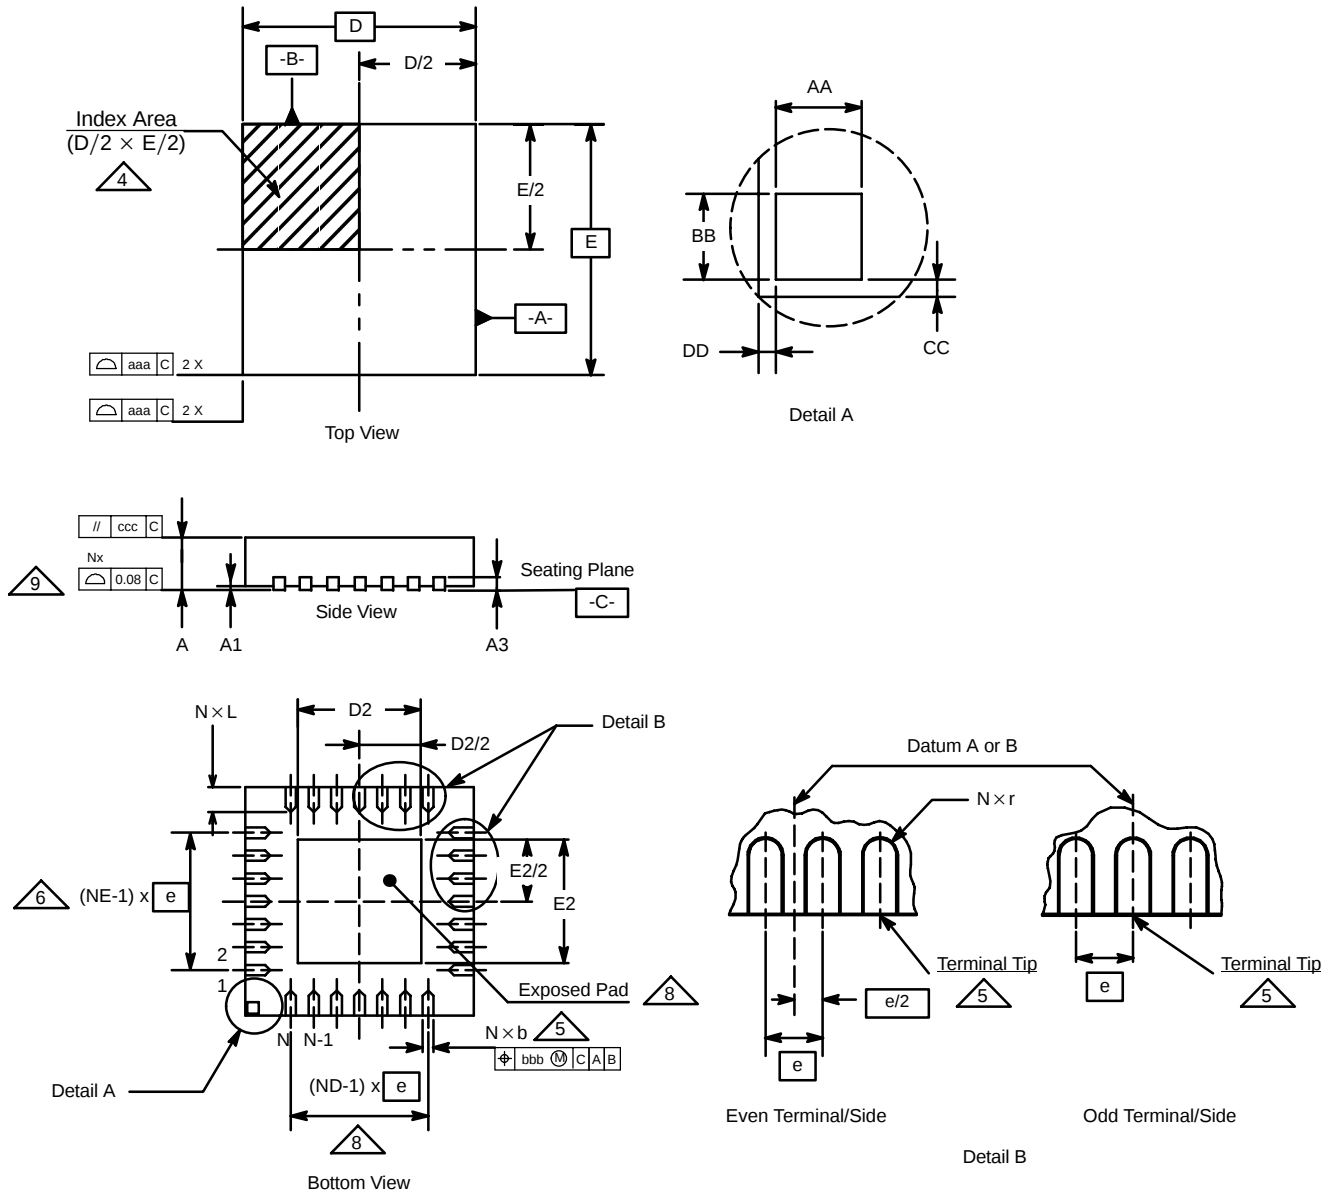

### QFN-16 (4 × 4 mm)

JEDEC Part Number: MO-220

| Dim | MILLIMETERS* |          |      | INCHES     |        |        | Notes |
|-----|--------------|----------|------|------------|--------|--------|-------|
|     | Min          | Nom      | Max  | Min        | Nom    | Max    |       |
| A   | 0.80         | 0.90     | 1.00 | 0.0315     | 0.0354 | 0.0394 |       |
| A1  | 0            | 0.02     | 0.05 | 0          | 0.0008 | 0.0020 |       |
| A3  | -            | 0.20 Ref | -    | -          | 0.0079 | -      |       |
| AA  | -            | 0.345    | -    | -          | 0.0136 | -      |       |
| aaa | -            | 0.25     | -    | -          | 0.0098 | -      |       |
| BB  | -            | 0.345    | -    | -          | 0.0136 | -      |       |
| b   | 0.23         | 0.30     | 0.38 | 0.0091     | 0.0118 | 0.0150 | 5     |
| bbb | -            | 0.10     | -    | -          | 0.0039 | -      |       |
| CC  | -            | 0.18     | -    | -          | 0.0071 | -      |       |
| ccc | -            | 0.10     | -    | -          | 0.0039 | -      |       |
| D   | 4.00 BSC     |          |      | 0.1575 BSC |        |        |       |
| D2  | 2.00         | 2.15     | 2.25 | 0.0787     | 0.0846 | 0.0886 |       |
| DD  | -            | 0.18     | -    | -          | 0.0071 | -      |       |
| E   | 4.00 BSC     |          |      | 0.1575 BSC |        |        |       |
| E2  | 2.00         | 2.15     | 2.25 | 0.0787     | 0.0846 | 0.0886 |       |
| e   | 0.65 BSC     |          |      | 0.0256 BSC |        |        |       |
| L   | 0.45         | 0.55     | 0.65 | 0.0177     | 0.0217 | 0.0256 |       |
| N   | 16           |          |      | 16         |        |        | 3, 7  |
| ND  | -            | 4        | -    | -          | 4      | -      | 6     |
| NE  | -            | 4        | -    | -          | 4      | -      | 6     |
| r   | b(min)/2     | -        | -    | b(min)/2   | -      | -      |       |

\* Use millimeters as the primary measurement.

ECN: S-21437—Rev. A, 19-Aug-02  
DWG: 5890

#### NOTES:

1. Dimensioning and tolerancing conform to ASME Y14.5M-1994.
2. All dimensions are in millimeters. All angles are in degrees.
3. N is the total number of terminals.

4. The terminal #1 identifier and terminal numbering convention shall conform to JESD 95-1 SPP-012. Details of terminal #1 identifier are optional, but must be located within the zone indicated. The terminal #1 identifier may be either a molded or marked feature. The X and Y dimension will vary according to lead counts.

5. Dimension b applies to metallized terminal and is measured between 0.25 mm and 0.30 mm from the terminal tip.

6. ND and NE refer to the number of terminals on the D and E side respectively.

7. Depopulation is possible in a symmetrical fashion.

8. Variation HHD is shown for illustration only.

9. Coplanarity applies to the exposed heat sink slug as well as the terminals.


## RECOMMENDED MINIMUM PADS FOR SO-16



Recommended Minimum Pads  
Dimensions in Inches/(mm)

[Return to Index](#)

**RECOMMENDED MINIMUM PADS FOR QFN-16 (4 x 4 MM BODY)**

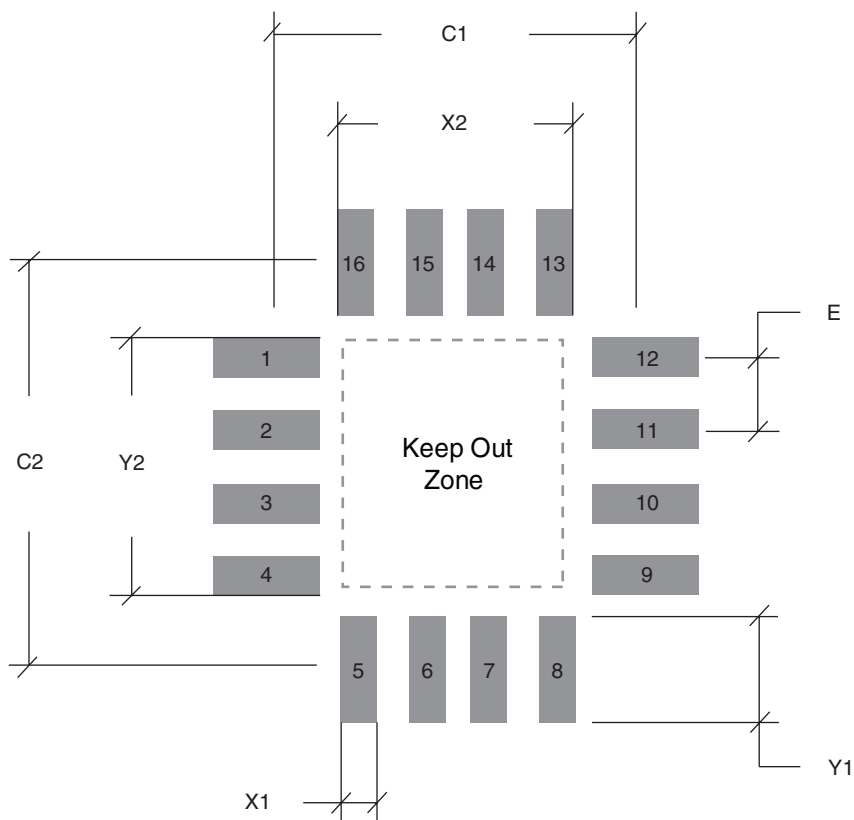

|    | Inches | Millimeters |
|----|--------|-------------|
| C1 | 0.142  | 3.60        |
| C2 | 0.142  | 3.60        |
| E  | 0.026  | 0.65        |
| X1 | 0.014  | 0.35        |
| X2 | 0.089  | 2.25        |
| Y1 | 0.037  | 0.95        |
| Y2 | 0.089  | 2.25        |

**Note:**

QFN-16 (4 x 4) has an exposed center pad that must not come into contact with any metalized structure on the PCB. This area is considered a Keep Out Zone.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9