

LTPD/CAPD Series 24 V **Printer** Mechanisms



In today's market product designers are asked to deliver smaller devices with more robust functionality, greater longevity, and enhanced reliability. To succeed products must be priced competitively and time to market is key. Point-of-sale (POS) systems, medical devices, and other products with embedded thermal printers are no exception. Each new generation must do more, cost less, and last longer.

New 24 V LTPD and CAPD series thermal printer mechanisms help engineers meet these challenges. These mechanisms are smaller and more robust, offering industry leading value, backed by critical advancements in design flexibility and reliability.

Small Form Factor

LTPD and CAPD series mechanisms free up critical design real estate. The new mechanisms offer a smaller overall form factor, innovative angled paper guide that requires less depth, and a smaller pitch flexible print circuit (FPC) cable.



Proven Reliability

LTPD and CAPD models are rated for a minimum of 100 km total printing and 100 million pulses for long life reliability. CAPD models offer a new built-in auto-cutter design, improving cutter reliability. The result: reliable media output, every time.

Design Flexibility

An array of form factor choices provides more flexibility for a smoother integration process. Options include, ASIC and interface board solutions, and both horizontal and vertical mechanical orientation designs.

- **2" and 3" print width models**
- **Choice of horizontal and vertical orientations**
- **EZ-OP clamshell paper replacement**
- **Platen latch for better shock absorption**
- **Available built-in auto-cutter (CAPD models)**

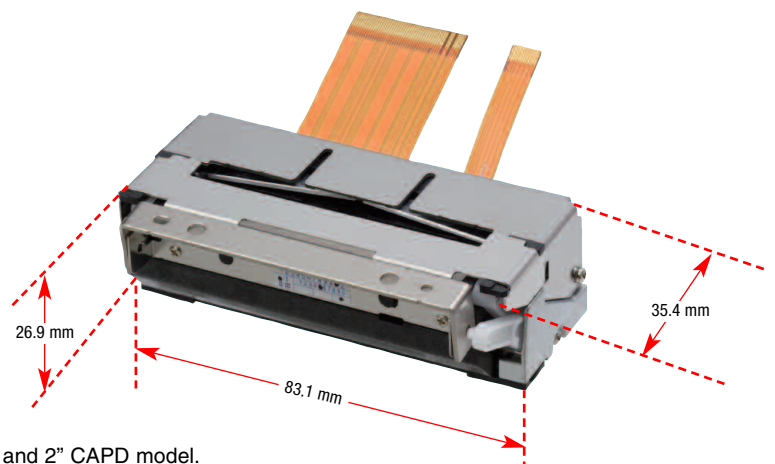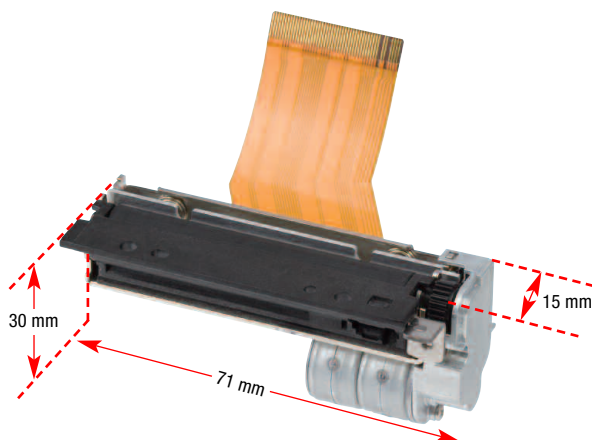

2" vertical LTPD model and 2" CAPD model.

Product Specifications

Model	LTPD247	LTPD347	CAPD247	CAPD347
Printing	Method Thermal line dot printing			
	Number of dots/line 432			
	Resolution(dots/mm) 8			
	Paper width (mm) 58 ^{+0.1}			
	Printing width (mm) 54			
	Speed (max mm/sec) 200			
Sensors	Paper path Curved			
	Head temperature By thermistor			
	Platen position detection By mechanical switch			
	Out of paper detection By photo interrupter			
	Cutter home position detection By photo interrupter			
Power supply (V)	Operating Voltage (Vdd) 2.7 to 3.6 / 4.75 to 5.25			
	Operating Voltage (Vp) 21.6 to 26.4			
Peak current (A)	Head 2.61 (26.4 V/144 dots) 5.23 (26.4 V/288 dots)		2.61 (26.4V/144dots) 5.23 (26.4V/288dots)	
	Motor 0.44		0.44	
	Cutter -		0.55	
Service life	Pulse activation (pulses) 100 million		100 million	
	Abrasion resistance (km)* 100 *		100 *	
Operating temperature (°C) -10 to 50				
Dimensions (WxDxHmm)*	Horizontal 71.0 x 30.0 x 15.0 **		91.0 x 30.0 x 15.0 **	
	Vertical 71.0 x 15.0 x 30.0 **		91.0 x 15.0 x 30.0 **	
Mass(g)	Approx. 56		Approx. 64	
	Approx. 56		Approx. 64	
Auto-cutter	Method Slide cutting			
	Paper thickness (um) -			
	Cutting type -			
	Operating time (sec/cycle) -			
	Minimum paper cutting length (mm) -			
	Cutting frequency (max cuts/min) -			
Life span	Paper cutting (cuts) -			
	700,000 *			

*Use recommended thermal paper. **Excluding convex section. ***Excluding Mounting Part. Specifications are subject to change without notice.

IF Board Specifications

	IFD001-01UK-E	IFD001-01SK-E
CPU	PTD00P01-E	
Corresponding Model	LTPD247,LTPD347 Series CAPD247,CAPD347 Series	
Operating Voltage (V)	Vp:21.6 to 26.4	
Character matrix (H x W dots)	16 dot characters: 16 x 8, 16 x 16 24 dot characters: 24 x 12, 24 x 24	
Character Type	Optional font	Yes
	Downloaded character	Yes
	User-defined character	Yes
	Extend graphics character set	Yes
	Katakana character set	Yes
	Codepage 1252	Yes
	JIS 1&2 level kanji	Yes
Communication interface	USB(2.0)	Serial (RS-232C)
Dimensions (W x D x H mm)	69.0 x 50.0 x 14.0	

Optional Cables

Accessory	Product
Power Cable	DC-04100A-E
Switch Cable	OC-D1430A-E
Serial Cable	OC-D0730A-E
USB Cable	IFC-U01-1-E

ASIC Specifications:

	PTD00P01-E
Corresponding model	LTPD247, LTPD347 series CAPD247, CAPD347 series
Package form	120 pin QFP
Operating voltage (V)	Vp:21.6 to 26.4,Vcc:3.0 to 3.6
Operating frequency (MHz)	12MHz±0.01%
Configuration	C-MOS LSI
Communication interface	Parallel, Serial, USB
Character type	Extended graphics character set Other characters available with CGs or external memory
Character matrix (H x W dots)	16 dot characters: 16 x 8, 16 x 16 24 dot characters: 24 x 12, 24 x 24
Dimensions (W x D x H mm)	16.0 x 16.0 x 1.7

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9