



**Is Now Part of**



**ON Semiconductor®**

**To learn more about ON Semiconductor, please visit our website at**  
**[www.onsemi.com](http://www.onsemi.com)**

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



March 2016

# FDP51N25 / FDPF51N25

## N-Channel UniFET™ MOSFET

250 V, 51 A, 60 mΩ

### Features


- $R_{DS(on)} = 48 \text{ m}\Omega$  (Typ.) @  $V_{GS} = 10 \text{ V}$ ,  $I_D = 25.5 \text{ A}$
- Low Gate Charge (Typ. 55 nC)
- Low  $C_{RSS}$  (Typ. 63 pF)

### Applications

- PDP TV
- Lighting
- Uninterruptible Power Supply
- AC-DC Power Supply

### Description

UniFET™ MOSFET is Fairchild Semiconductor's high voltage MOSFET family based on planar stripe and DMOS technology. This MOSFET is tailored to reduce on-state resistance, and to provide better switching performance and higher avalanche energy strength. This device family is suitable for switching power converter applications such as power factor correction (PFC), flat panel display (FPD) TV power, ATX and electronic lamp ballasts.

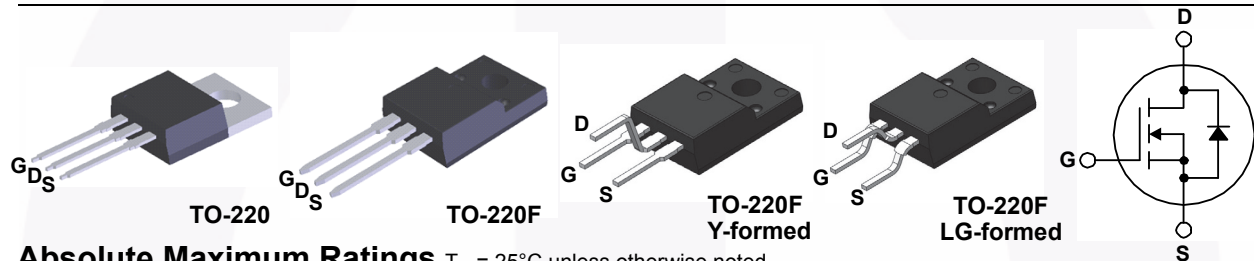

### Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ unless otherwise noted.

| Symbol         | Parameter                                                                                                                      | FDP51N25                                   | FDPF51N25<br>FDPF51N25YDTU<br>FDPF51N25RDTU | Unit                |
|----------------|--------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|---------------------------------------------|---------------------|
| $V_{DSS}$      | Drain-Source Voltage                                                                                                           | 250                                        |                                             | V                   |
| $I_D$          | Drain Current                                                                                                                  | - Continuous ( $T_C = 25^\circ\text{C}$ )  | 51                                          | A                   |
|                |                                                                                                                                | - Continuous ( $T_C = 100^\circ\text{C}$ ) | 30                                          | A                   |
| $I_{DM}$       | Drain Current - Pulsed (Note 1)                                                                                                | 204                                        | 204*                                        | A                   |
| $V_{GSS}$      | Gate-Source voltage                                                                                                            | $\pm 30$                                   |                                             | V                   |
| $E_{AS}$       | Single Pulsed Avalanche Energy (Note 2)                                                                                        | 1111                                       |                                             | mJ                  |
| $I_{AR}$       | Avalanche Current (Note 1)                                                                                                     | 51                                         |                                             | A                   |
| $E_{AR}$       | Repetitive Avalanche Energy (Note 1)                                                                                           | 32                                         |                                             | mJ                  |
| $V_{ISO}$      | Insulation withstand voltage (RMS) from all three leads to external heat sink ( $t=0.3\text{sec}$ ; $T_C = 25^\circ\text{C}$ ) | N/A                                        | 2500                                        | V                   |
| $dv/dt$        | Peak Diode Recovery $dv/dt$ (Note 3)                                                                                           | 4.5                                        |                                             | V/ns                |
| $P_D$          | Power Dissipation                                                                                                              | ( $T_C = 25^\circ\text{C}$ )               | 320                                         | W                   |
|                |                                                                                                                                | - Derate Above $25^\circ\text{C}$          | 3.7                                         | W/ $^\circ\text{C}$ |
| $T_J, T_{STG}$ | Operating and Storage Temperature Range                                                                                        | $-55$ to $+150$                            |                                             | $^\circ\text{C}$    |
| $T_L$          | Maximum Lead Temperature for Soldering, 1/8" from Case for 5 Seconds                                                           | 300                                        |                                             | $^\circ\text{C}$    |

\*Drain current limited by maximum junction temperature.

### Thermal Characteristics

| Symbol          | Parameter                                     | FDP51N25 | FDPF51N25<br>FDPF51N25YDTU<br>FDPF51N25RDTU | Unit               |
|-----------------|-----------------------------------------------|----------|---------------------------------------------|--------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case, Max.    | 0.39     | 3.3                                         | $^\circ\text{C/W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient, Max. | 62.5     | 62.5                                        | $^\circ\text{C/W}$ |

## Package Marking and Ordering Information

| Part Number   | Top Mark  | Package                | Packing Method | Reel Size | Tape Width | Quantity |
|---------------|-----------|------------------------|----------------|-----------|------------|----------|
| FDP51N25      | FDP51N25  | TO-220                 | Tube           | N/A       | N/A        | 50 units |
| FDPF51N25     | FDPF51N25 | TO-220F                | Tube           | N/A       | N/A        | 50 units |
| FDPF51N25YDTU | FDPF51N25 | TO-220F<br>(Y-formed)  | Tube           | N/A       | N/A        | 50 units |
| FDPF51N25RDTU | FDPF51N25 | TO-220F<br>(LG-formed) | Tube           | N/A       | N/A        | 50 units |

## Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted.

| Symbol                                                 | Parameter                                             | Conditions                                                                                                                  | Min.     | Typ.     | Max.    | Unit     |
|--------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------|----------|---------|----------|
| Off Characteristics                                    |                                                       |                                                                                                                             |          |          |         |          |
| BV <sub>DSS</sub>                                      | Drain-Source Breakdown Voltage                        | V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA, T <sub>J</sub> = 25 °C                                                      | 250      | --       | --      | V        |
| ΔBV <sub>DSS</sub> / ΔT <sub>J</sub>                   | Breakdown Voltage Temperature Coefficient             | I <sub>D</sub> = 250 μA, Referenced to 25°C                                                                                 | --       | 0.25     | --      | V/°C     |
| I <sub>DSS</sub>                                       | Zero Gate Voltage Drain Current                       | V <sub>DS</sub> = 250 V, V <sub>GS</sub> = 0 V<br>V <sub>DS</sub> = 200 V, T <sub>C</sub> = 125°C                           | --<br>-- | --<br>-- | 1<br>10 | μA<br>μA |
| I <sub>GSSF</sub>                                      | Gate-Body Leakage Current, Forward                    | V <sub>GS</sub> = 30 V, V <sub>DS</sub> = 0 V                                                                               | --       | --       | 100     | nA       |
| I <sub>GSSR</sub>                                      | Gate-Body Leakage Current, Reverse                    | V <sub>GS</sub> = -30 V, V <sub>DS</sub> = 0V                                                                               | --       | --       | -100    | nA       |
| On Characteristics                                     |                                                       |                                                                                                                             |          |          |         |          |
| V <sub>GS(th)</sub>                                    | Gate Threshold Voltage                                | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250 μA                                                                 | 3.0      | --       | 5.0     | V        |
| R <sub>DS(on)</sub>                                    | Static Drain-Source On-Resistance                     | V <sub>GS</sub> = 10 V, I <sub>D</sub> = 25.5 A                                                                             | --       | 0.048    | 0.060   | Ω        |
| g <sub>FS</sub>                                        | Forward Transconductance                              | V <sub>DS</sub> = 40 V, I <sub>D</sub> = 25.5 A                                                                             | --       | 43       | --      | S        |
| Dynamic Characteristics                                |                                                       |                                                                                                                             |          |          |         |          |
| C <sub>iss</sub>                                       | Input Capacitance                                     | V <sub>DS</sub> = 25 V, V <sub>GS</sub> = 0 V,<br>f = 1 MHz                                                                 | --       | 2620     | 3410    | pF       |
| C <sub>oss</sub>                                       | Output Capacitance                                    |                                                                                                                             | --       | 530      | 690     | pF       |
| C <sub>rss</sub>                                       | Reverse Transfer Capacitance                          |                                                                                                                             | --       | 63       | 90      | pF       |
| Switching Characteristics                              |                                                       |                                                                                                                             |          |          |         |          |
| t <sub>d(on)</sub>                                     | Turn-On Delay Time                                    | V <sub>DD</sub> = 125 V, I <sub>D</sub> = 51 A,<br>V <sub>GS</sub> = 10 V, R <sub>G</sub> = 25 Ω<br><br><div>(Note 4)</div> | --       | 62       | 135     | ns       |
| t <sub>r</sub>                                         | Turn-On Rise Time                                     |                                                                                                                             | --       | 465      | 940     | ns       |
| t <sub>d(off)</sub>                                    | Turn-Off Delay Time                                   |                                                                                                                             | --       | 98       | 205     | ns       |
| t <sub>f</sub>                                         | Turn-Off Fall Time                                    |                                                                                                                             | --       | 130      | 270     | ns       |
| Q <sub>g</sub>                                         | Total Gate Charge                                     | V <sub>DS</sub> = 200 V, I <sub>D</sub> = 51 A,<br>V <sub>GS</sub> = 10 V<br><br><div>(Note 4)</div>                        | --       | 55       | 70      | nC       |
| Q <sub>gs</sub>                                        | Gate-Source Charge                                    |                                                                                                                             | --       | 16       | --      | nC       |
| Q <sub>gd</sub>                                        | Gate-Drain Charge                                     |                                                                                                                             | --       | 27       | --      | nC       |
| Drain-Source Diode Characteristics and Maximum Ratings |                                                       |                                                                                                                             |          |          |         |          |
| I <sub>S</sub>                                         | Maximum Continuous Drain-Source Diode Forward Current |                                                                                                                             | --       | --       | 51      | A        |
| I <sub>SM</sub>                                        | Maximum Pulsed Drain-Source Diode Forward Current     |                                                                                                                             | --       | --       | 204     | A        |
| V <sub>SD</sub>                                        | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = 51 A                                                                                | --       | --       | 1.4     | V        |
| t <sub>rr</sub>                                        | Reverse Recovery Time                                 | V <sub>GS</sub> = 0 V, I <sub>S</sub> = 51 A,<br>dI <sub>F</sub> /dt =100 A/μs                                              | --       | 178      | --      | ns       |
| Q <sub>rr</sub>                                        | Reverse Recovery Charge                               |                                                                                                                             | --       | 4.0      | --      | μC       |

### Notes:

1. Repetitive rating: pulse-width limited by maximum junction temperature.
2.  $L = 0.68\text{ mH}$ ,  $I_{AS} = 51\text{ A}$ ,  $V_{DD} = 50\text{ V}$ ,  $R_G = 25\text{ }\Omega$  starting  $T_J = 25^\circ\text{C}$ .
3.  $I_{SD} \leq 51\text{ A}$ ,  $di/dt \leq 200\text{ A}/\mu\text{s}$ ,  $V_{DD} \leq BV_{DSS}$ , starting  $T_J = 25^\circ\text{C}$ .
4. Essentially independent of operating temperature typical characteristics.

## Typical Performance Characteristics

Figure 1. On-Region Characteristics

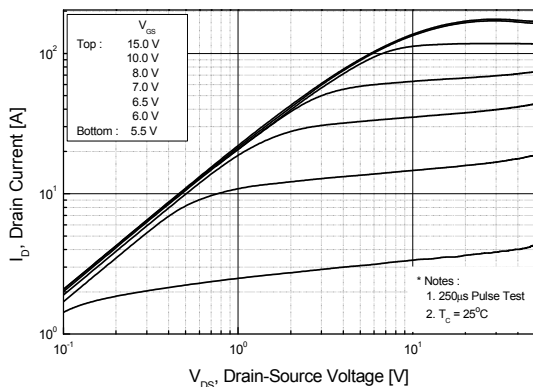


Figure 2. Transfer Characteristics

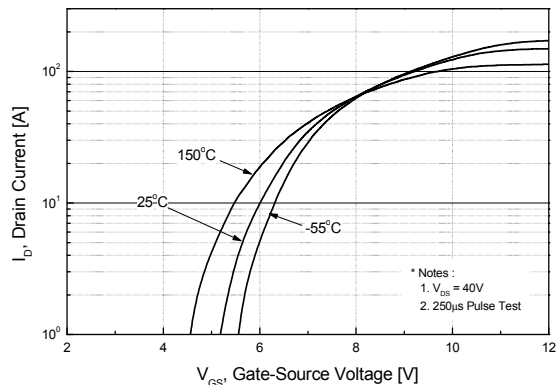


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

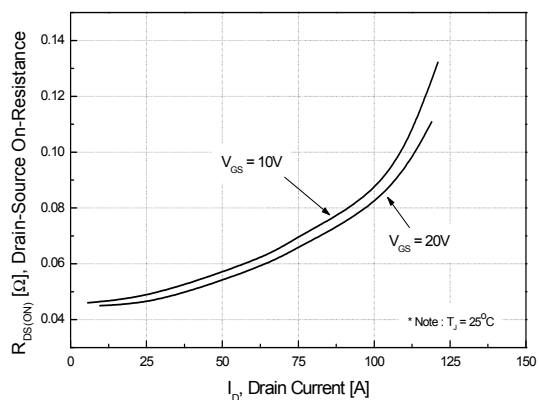


Figure 4. Body Diode Forward Voltage Variation vs. Source Current and Temperature

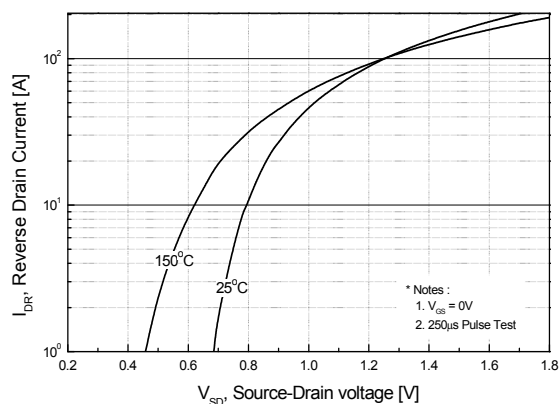


Figure 5. Capacitance Characteristics



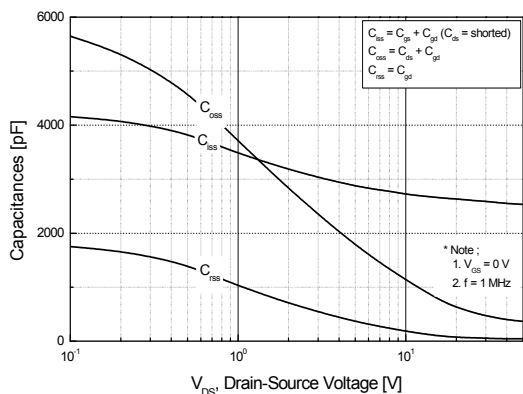


Figure 6. Gate Charge Characteristics

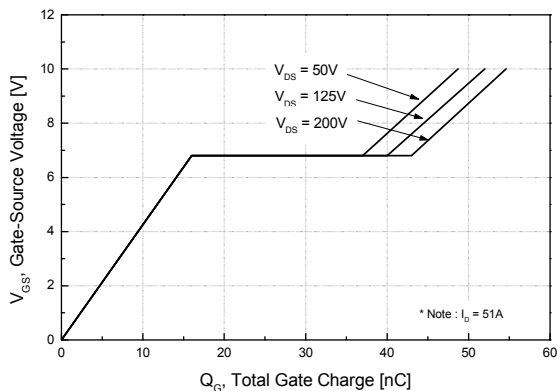


# Typical Performance Characteristics (Continued)


**Figure 7. Breakdown Voltage Variation vs. Temperature**

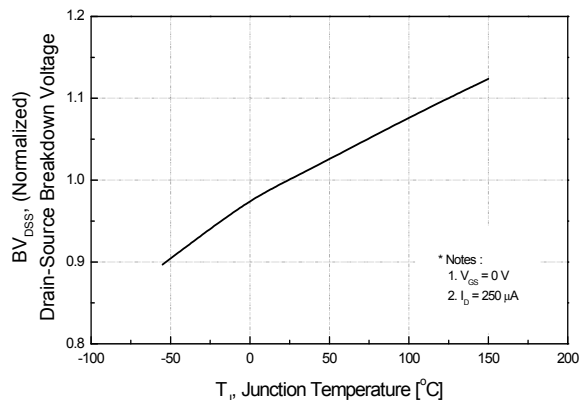


**Figure 8. On-Resistance Variation vs. Temperature**

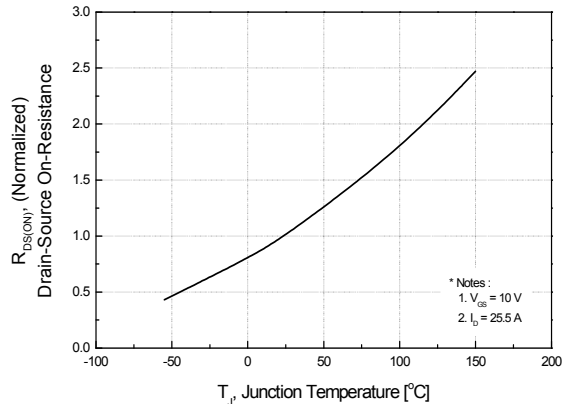


**Figure 9-1. Maximum Safe Operating Area for FDP51N25**

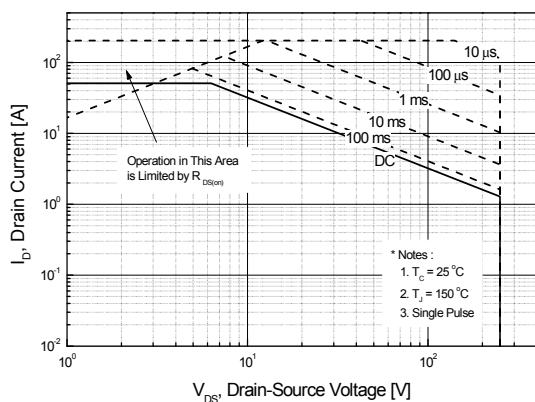

**Figure 9-2. Maximum Safe Operating Area for FDPF51N25 / FDPF51N25YDTU**

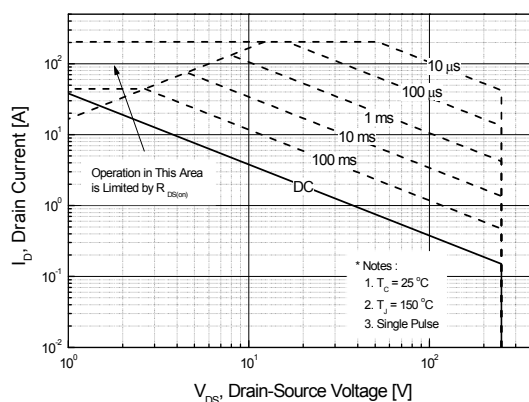

**Figure 10. Maximum Drain Current vs. Case Temperature**

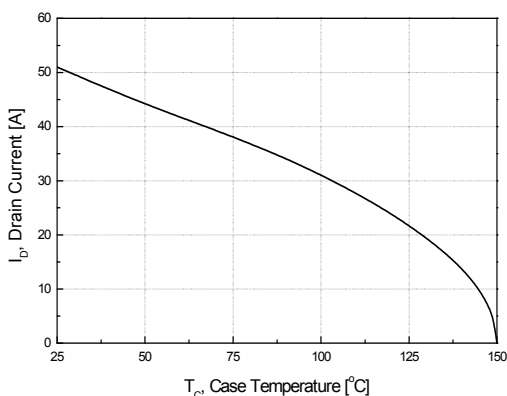

# Typical Performance Characteristics (Continued)

Figure 11-1. Transient Thermal Response Curve for FDP51N25

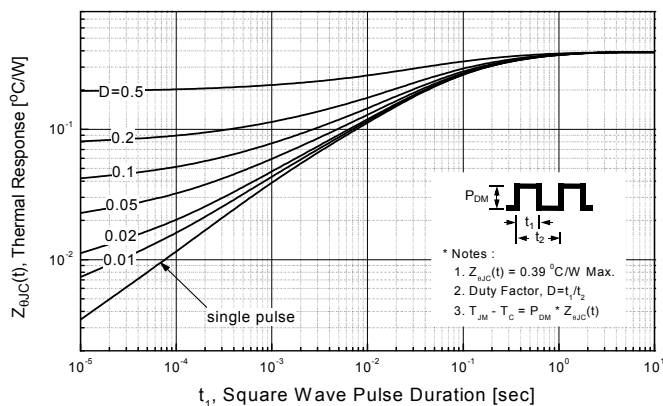
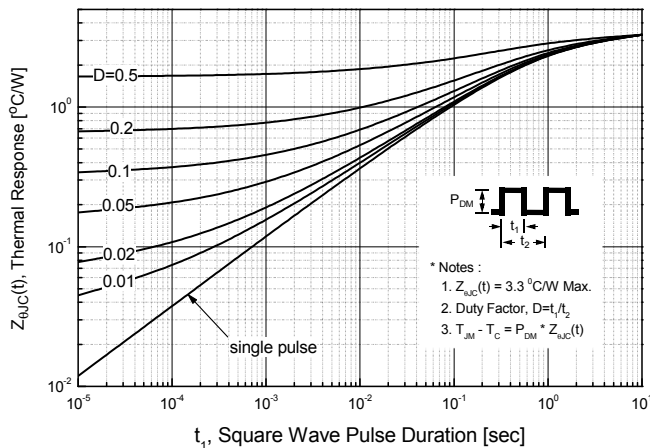


Figure 11-2. Transient Thermal Response Curve for FDPF51N25 / FDPF51N25YDTU



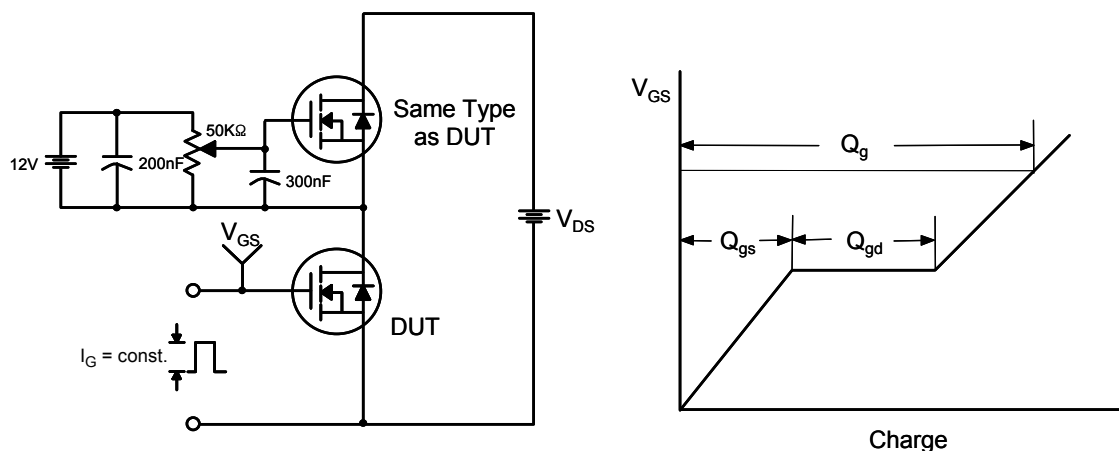


Figure 12. Gate Charge Test Circuit & Waveform

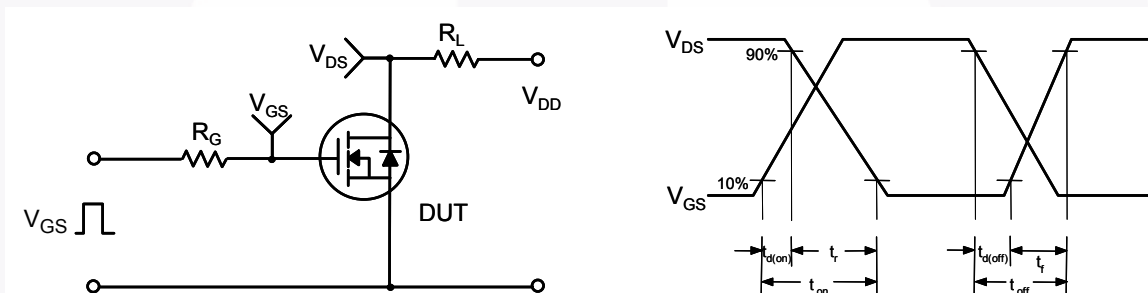


Figure 13. Resistive Switching Test Circuit & Waveforms

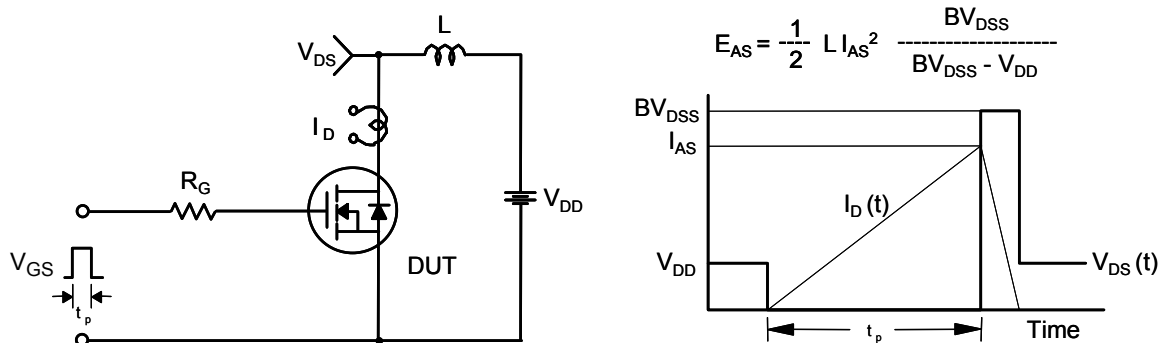


Figure 14. Unclamped Inductive Switching Test Circuit & Waveforms




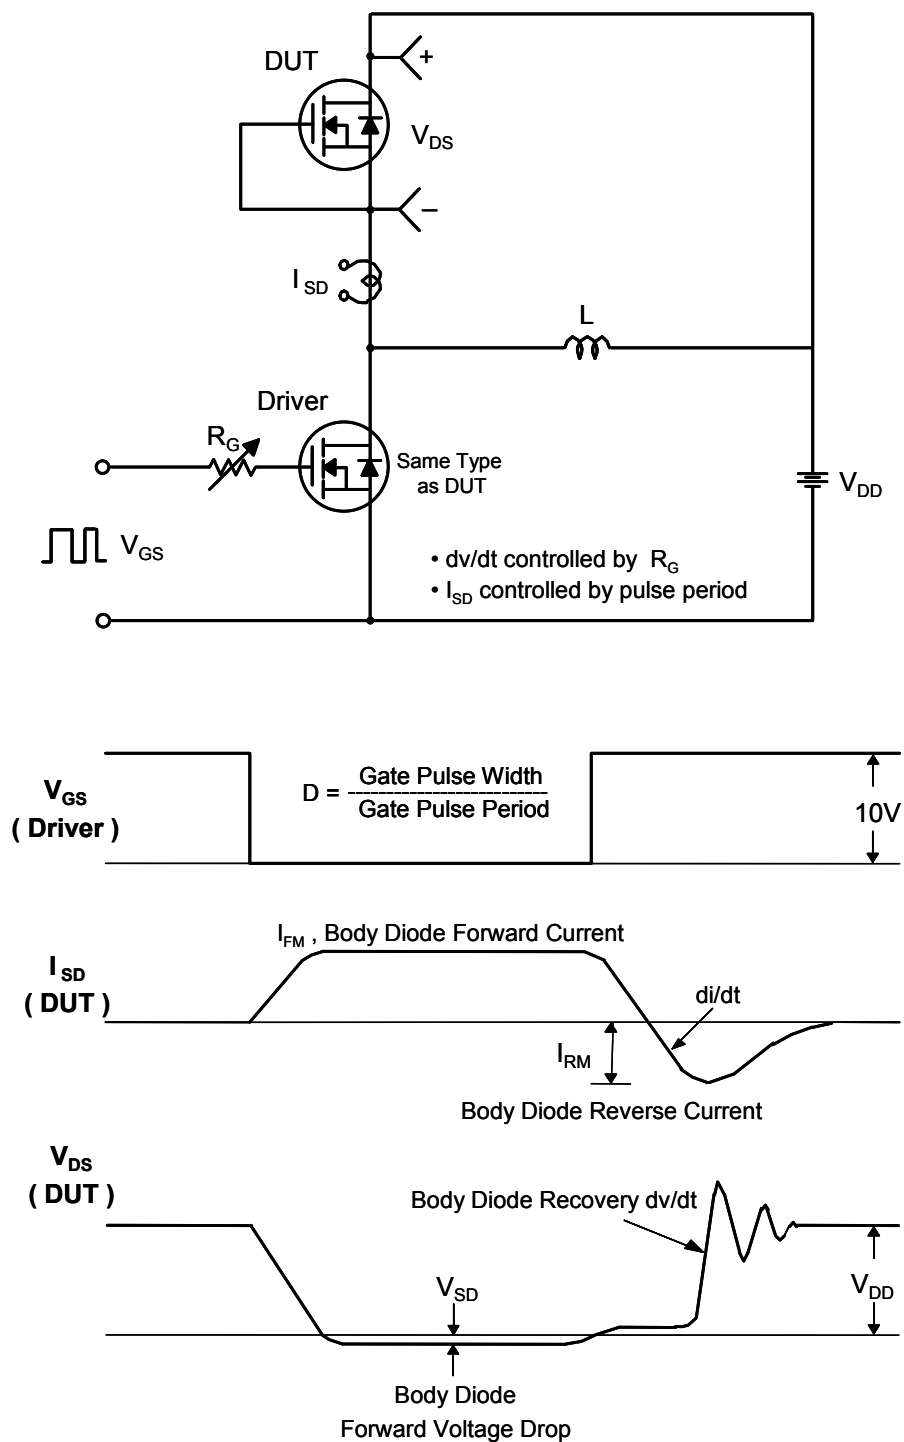


Figure 15. Peak Diode Recovery  $dv/dt$  Test Circuit & Waveforms

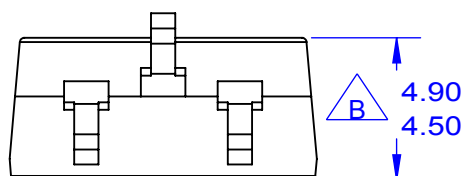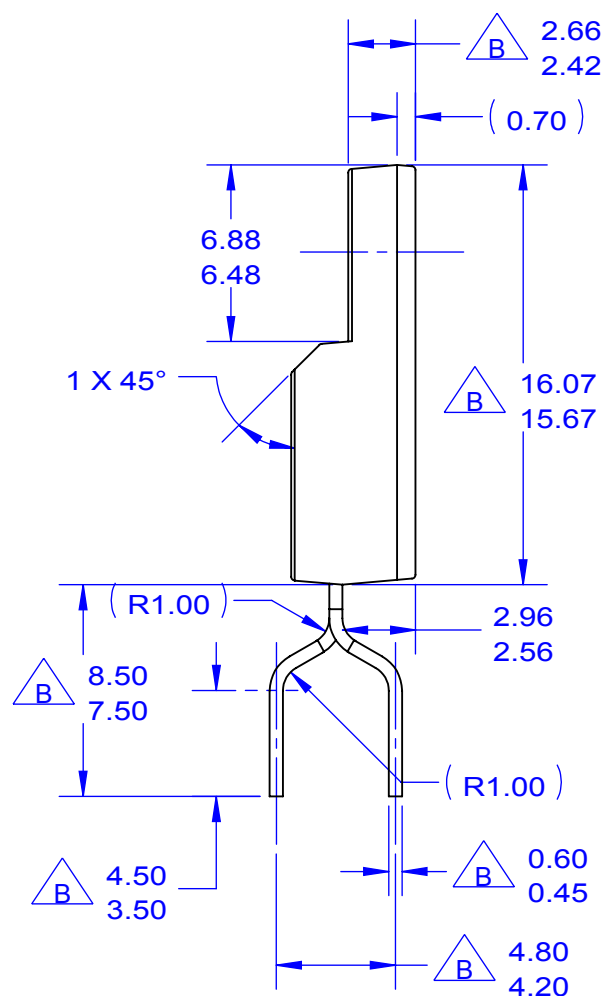


ON Semiconductor

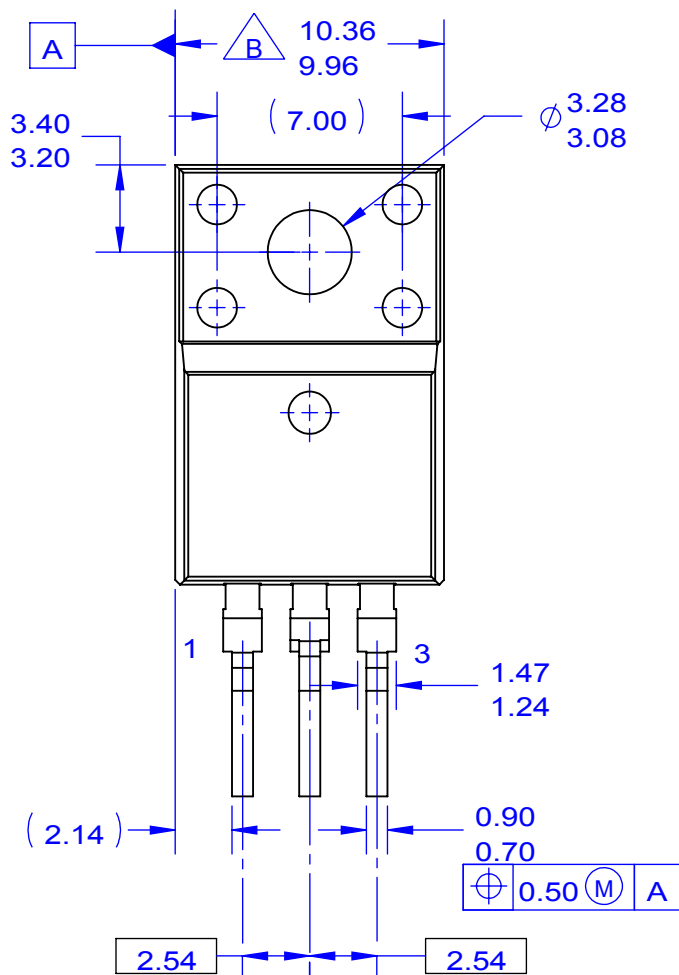

#### NOTES:

- A. EXCEPT WHERE NOTED CONFORMS TO EIAJ SC91A.
- B. DOES NOT COMPLY EIAJ STD. VALUE.
- C. ALL DIMENSIONS ARE IN MILLIMETERS.
- D. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- E. DIMENSION AND TOLERANCE AS PER ASME Y14.5-1994.
- F. DRAWING FILE NAME: TO220N03REV2

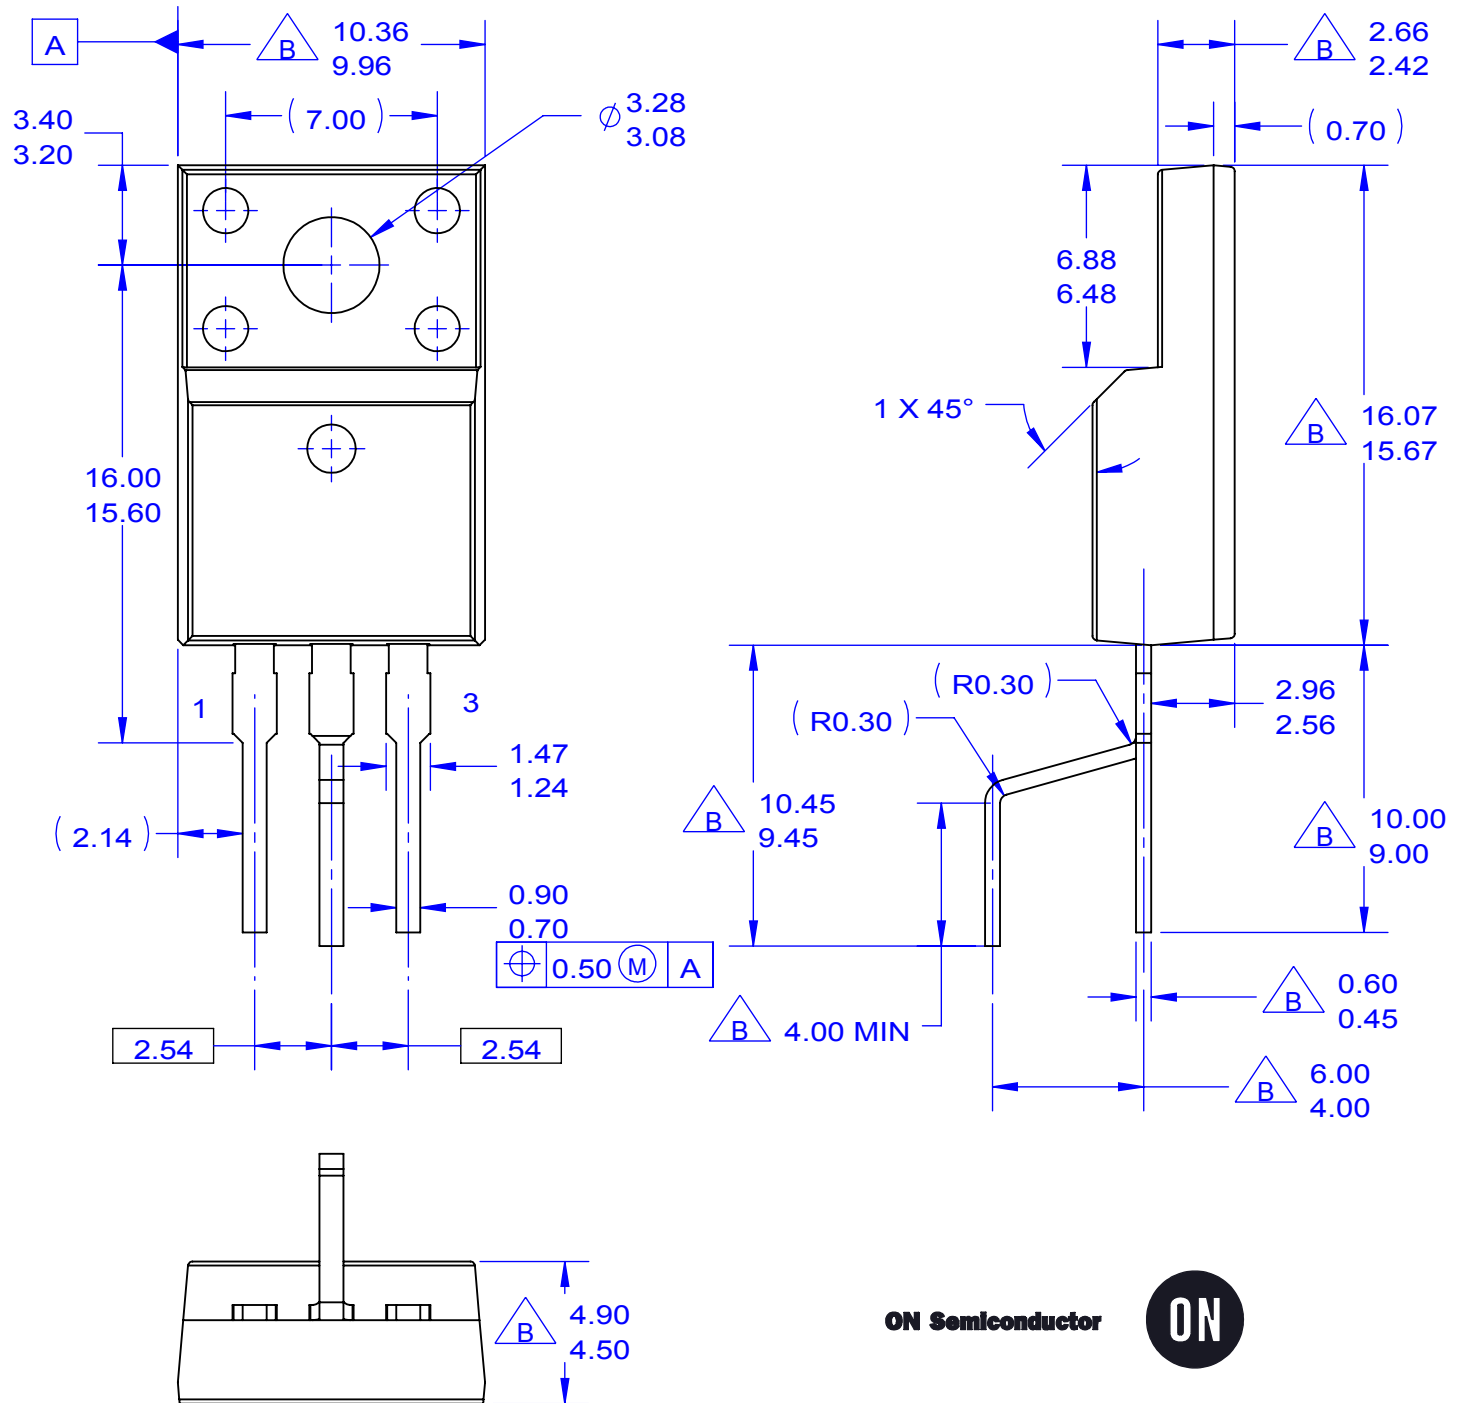



ON Semiconductor



#### NOTES:

- EXCEPT WHERE NOTED CONFORMS TO EIAJ SC91A.
- DOES NOT COMPLY EIAJ STD. VALUE.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- DIMENSION AND TOLERANCE AS PER ASME Y14.5-1994.
- DRAWING FILE NAME: TO220Q03REV2

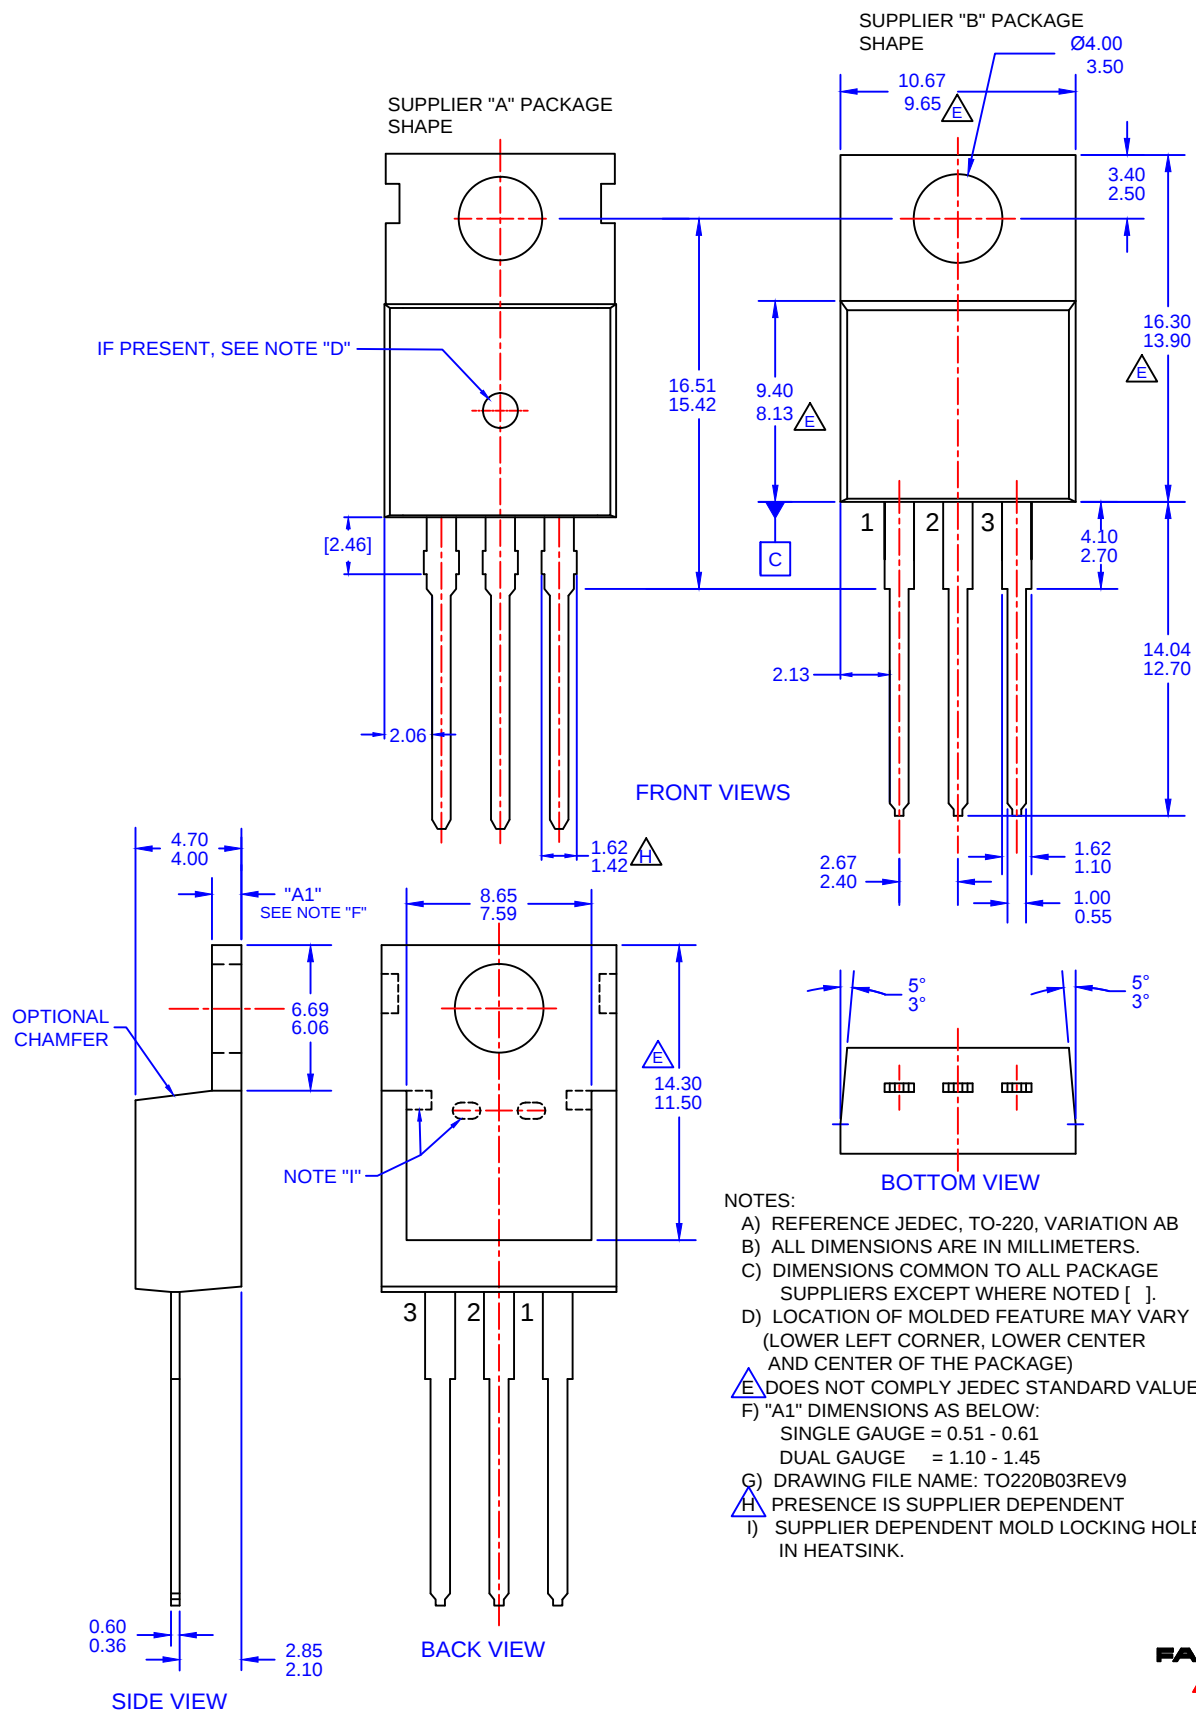

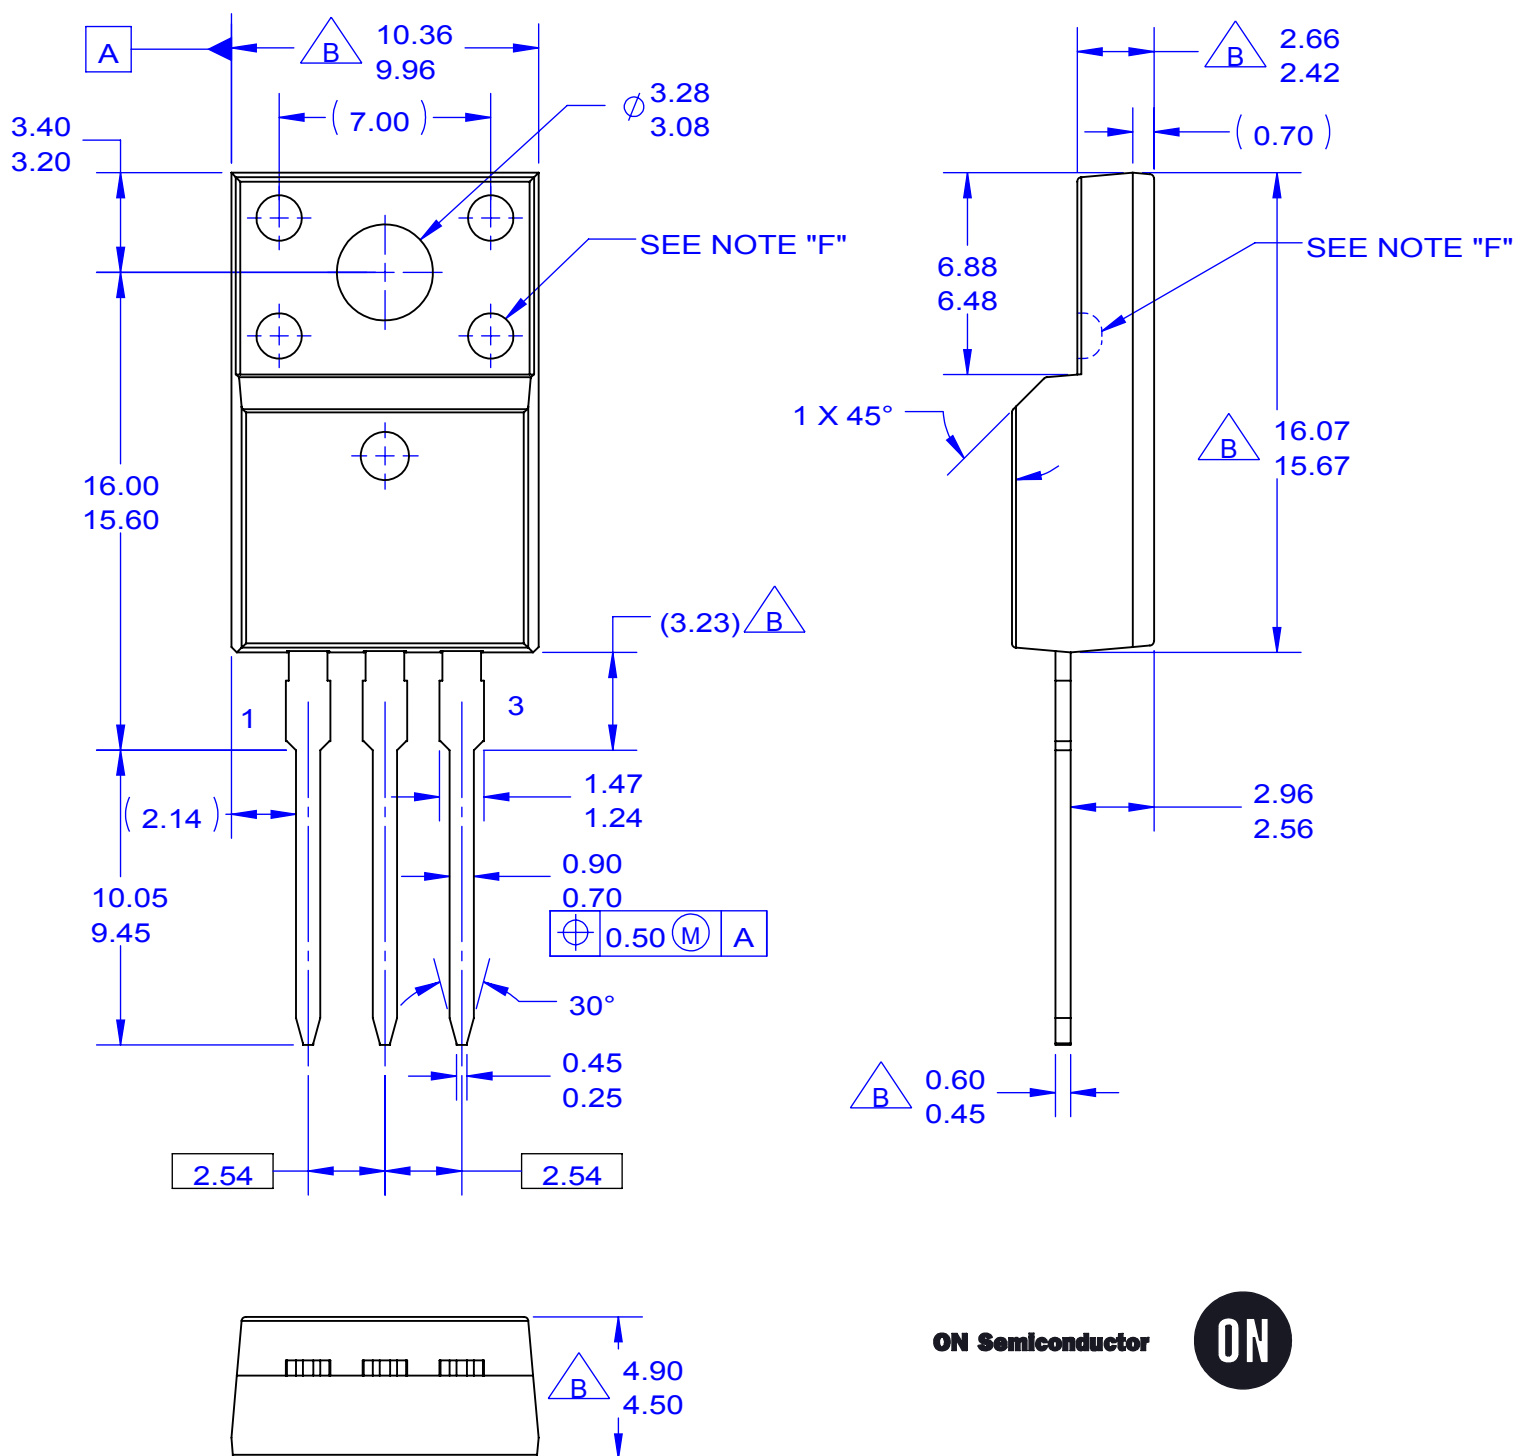

ON Semiconductor



ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[FDPF51N25RDTU](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9