

## DISTINCTIVE CHARACTERISTICS

- Organic LED technology; now with 30,000 hours life and 30% less power consumption
- Range of 65,536 colors in 16 bit mode, 256 colors in 8 bit mode
- Full viewing angle of 180°
- Exceptional contrast: 50 times greater than previous LCD products
- Four times more enhanced resolution
- High resolution provides sharp, clear images of very small characters
- Operated by commands and data supplied via serial communications (SPI)
- Distinct, long travel of 4.5mm (same as KP01 Series)
- Dust tight construction
- Stylish, translucent black housing design


Viewing area: 15.5mm x 11.6mm (horizontal x vertical)

High reliability and long life of three million actuations minimum


High resolution of 64RGB x 48 pixels

Epoxy sealed straight PC terminals

Snap-in standoff for easy, secure mounting and alignment

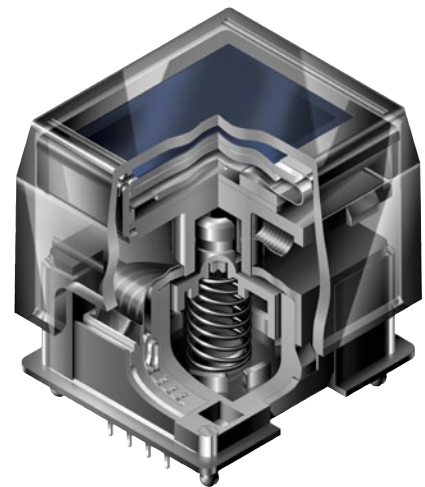

Actual Size



## SWITCH DESCRIPTION



| Switch Description   | OLED  | Pixel Format                               |
|--|---|--|
| SPST, Momentary ON<br>Gold Contacts<br>Straight PC Terminals | Color OLED<br>Display Module<br>65,536 Colors | 64RGB x 48 Pixels<br>Horizontal x Vertical |

## SWITCH SPECIFICATIONS

|   |  |
|---|--|
| <b>Circuit</b>                              | SPST normally open                                   |
| <b>Contact Position</b>                     | Leave actuator: ① – ② OFF<br>Push actuator: ① – ② ON |
| <b>Electrical Capacity (Resistive Load)</b> | 100mA @ 12V DC                                       |
| <b>Contact Resistance</b>                   | 200 milliohms maximum @ 20mV 10mA                    |
| <b>Insulation Resistance</b>                | 100 megohms minimum @ 100V DC                        |
| <b>Dielectric Strength</b>                  | 125V AC for 1 minute minimum                         |
| <b>Mechanical Endurance</b>                 | 3,000,000 operations minimum                         |
| <b>Electrical Endurance</b>                 | 3,000,000 operations minimum                         |
| <b>Operating Force</b>                      | 2.0 ± 0.5 Newtons                                    |
| <b>Total Travel</b>                         | 4.5mm (.177")  |

## OLED SPECIFICATIONS

### Characteristics of Display

|                                    |   |
|------------------------------------|---|
| <b>Display Device</b>              | Color OLED display module   |
| <b>Display Mode</b>                | Passive matrix  |
| <b>Viewing Area</b>                | 15.5mm x 11.6mm (horizontal x vertical)   |
| <b>Pixel Format</b>                | 64RGB x 48 pixels (horizontal x vertical)   |
| <b>Pixel Size</b>                  | 0.21mm x 0.20mm (horizontal x vertical)   |
| <b>Interface</b>                   | Serial (SPI) interface  |
| <b>Number of Colors</b>            | 65,536 Colors (16bit: R 5bit/G 6bit/B 5bit)<br>or 256 Colors (8bit: R 2bit/G 3bit/B 3bit) |
| <b>Operating Temperature Range</b> | -20°C ~ +70°C (-4°F ~ +158°F)   |
| <b>Storage Temperature Range</b>   | -30°C ~ +80°C (-22°F ~ +176°F)  |
| <b>Operating Life (Display)</b>    | 30,000 hours (at 40% pixels ON)   |

### Absolute Maximum Ratings

| Items                              | Symbols         | Ratings                        |
|------------------------------------|-----------------|--------------------------------|
| Supply Voltage for Logic/Interface | V <sub>DD</sub> | -0.3V to +4.0V                 |
| Supply Voltage for Drive           | V <sub>CC</sub> | -0.0V to +19.0V                |
| Input Voltage                      | V <sub>I</sub>  | -0.3V to V <sub>DD</sub> +0.3V |

### Current Consumption

(Temperature at 25°C, V<sub>DD</sub> = 2.8V, V<sub>CC</sub> = 16.0V)

| Items  | Symbols          | Min | Typical | Max    |
|--|------------------|-----|---------|--------|
| All-Pixels-On Mode<br>*Drive System Power Current    | I <sub>CC1</sub> | —   | 3.8mA   | 4.6mA  |
| All-Pixels-On Mode<br>*Logic/IF System Power Current | I <sub>DD1</sub> | —   | 0.16mA  | 0.19mA |
| Sleep Mode<br>**Drive System Power Current           | I <sub>CC2</sub> | —   | —       | 10µA   |
| Sleep Mode<br>**Logic/IF System Power Current        | I <sub>DD2</sub> | —   | —       | 10µA   |

\* All pixels shall be turned on with the maximum level gray scale

\*\* All pixels shall be turned off (while chip is operating)

### Recommended Operating Conditions

| Items                              | Symbols         | Minimum               | Typical | Maximum               |
|------------------------------------|-----------------|-----------------------|---------|-----------------------|
| Supply Voltage for Logic/Interface | V <sub>DD</sub> | 2.4V                  | 2.8V    | 3.5V                  |
| Supply Voltage for Drive           | V <sub>CC</sub> | 15.0V                 | 16.0V   | 17.0V                 |
| Input High Level Voltage           | V <sub>IH</sub> | 0.8 x V <sub>DD</sub> | —       | —                     |
| Input Low Level Voltage            | V <sub>IL</sub> | —                     | —       | 0.2 x V <sub>DD</sub> |


### Optical Characteristics (Temperature at 25°C, Initial Value: 87 x 0F)

| Items                         | Min | Typical | Max  | Unit              | Remarks                  |
|-------------------------------|-----|---------|------|-------------------|--------------------------|
| <b>Luminosity</b>             | 75  | 100     | 125  | cd/m <sup>2</sup> | White<br>(All pixels on) |
| <b>White Color Coordinate</b> | (x) | 0.26    | 0.30 | 0.34              | —                        |
|                               | (y) | 0.32    | 0.37 | 0.42              | —                        |
| <b>Red Color Coordinate</b>   | (x) | 0.63    | 0.67 | 0.71              | —                        |
|                               | (y) | 0.29    | 0.33 | 0.37              | —                        |
| <b>Green Color Coordinate</b> | (x) | 0.19    | 0.23 | 0.27              | —                        |
|                               | (y) | 0.61    | 0.65 | 0.69              | —                        |
| <b>Blue Color Coordinate</b>  | (x) | 0.10    | 0.14 | 0.18              | —                        |
|                               | (y) | 0.14    | 0.20 | 0.26              | —                        |
| <b>Contrast Ratio</b>         | 100 | —       | —    | —                 | —                        |

## SWITCH BLOCK DIAGRAM & PIN CONFIGURATIONS





OLED SMARTSWITCH™



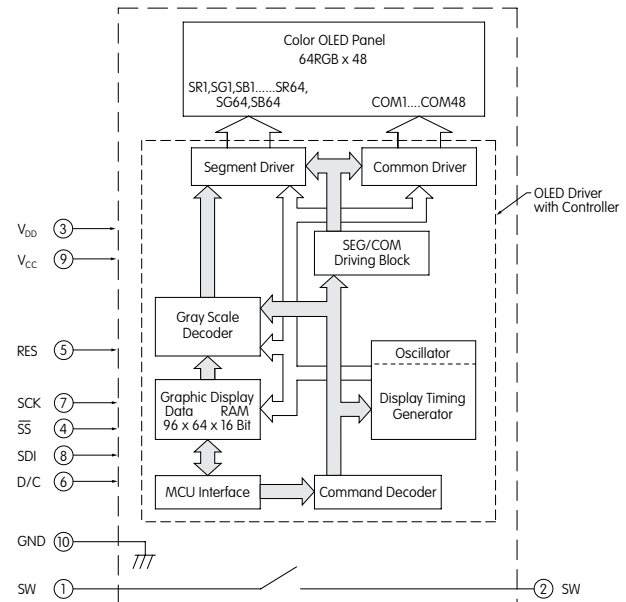


| Pin No. | Symbol          | Name               | Function   |
|---------|-----------------|--------------------|--|
| ①       | SW              | Terminal of Switch | Normally open  |
| ②       | SW              | Terminal of Switch | Normally open  |
| ③       | V <sub>DD</sub> | Power              | Power source for logic circuit   |
| ④       | SS              | Slave Select       | Slave select for SPI. This line is active low.   |
| ⑤       | RES             | Reset              | Reset signal input. When pin is low, initialization of chip is executed.   |
| ⑥       | D/C             | Data/Command       | Data/Command Control. When pin is pulled low, data will be interpreted as Command; when pulled high, data will be interpreted as Data. |
| ⑦       | SCK             | Serial Clock       | Clock line for SPI that synchronizes command and data  |
| ⑧       | SDI             | Serial Data In     | Data input line for SPI  |
| ⑨       | V <sub>CC</sub> | Power              | Power source for drive circuit   |
| ⑩       | GND             | Ground             | Connect to Ground  |


## TYPICAL SWITCH DIMENSIONS

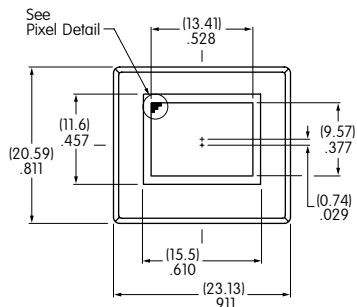


Terminal numbers are not on the switch.

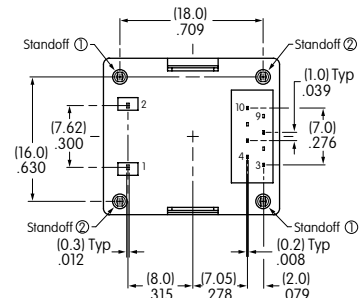

### Standoff Detail




### Footprint

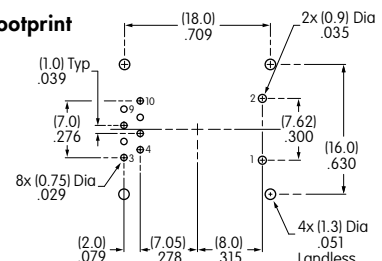


## TIMING SPECIFICATIONS

**AC Characteristics** (Temperature at 25°C),  $V_{DD} = 2.4V \sim 3.5V$

| Items                      | Symbols     | Minimum | Typical | Maximum |
|----------------------------|-------------|---------|---------|---------|
| Clock Cycle Time           | $t_{cycle}$ | 150ns   | —       | —       |
| D/C Setup Time             | $t_{AS}$    | 40ns    | —       | —       |
| D/C Hold Time              | $t_{AH}$    | 40ns    | —       | —       |
| $\overline{SS}$ Setup Time | $t_{CSS}$   | 75ns    | —       | —       |
| $\overline{SS}$ Hold Time  | $t_{CSH}$   | 60ns    | —       | —       |
| Write Data Setup Time      | $t_{DSW}$   | 40ns    | —       | —       |
| Write Data Hold Time       | $t_{DHW}$   | 40ns    | —       | —       |
| SCK Low Time               | $t_{CLKL}$  | 75ns    | —       | —       |
| SCK High Time              | $t_{CLKH}$  | 75ns    | —       | —       |
| SCK Rise Time              | $t_R$       | —       | —       | 15ns    |
| SCK Fall Time              | $t_F$       | —       | —       | 15ns    |

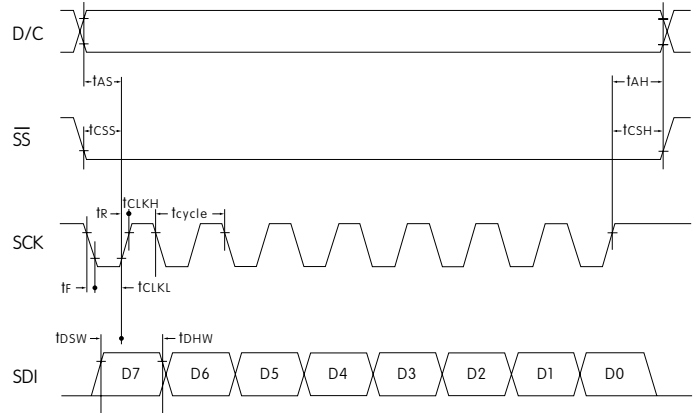


## STATE TRANSITION

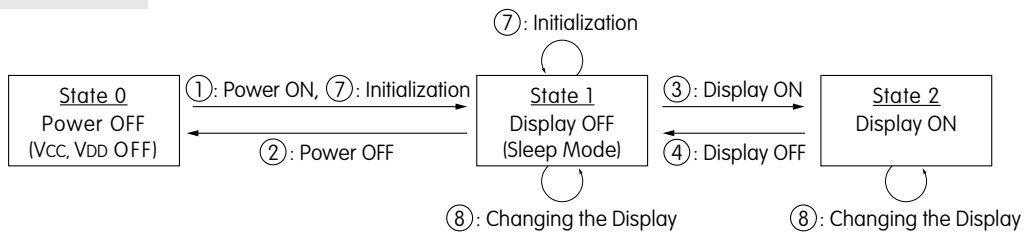

| State Number | State       | Display | Sleep | $V_{CC}$ | $V_{DD}$ | Changing the Display |
|--------------|-------------|---------|-------|----------|----------|----------------------|
| 0            | Power OFF   | OFF     | —     | OFF      | OFF      | Disable              |
| 1            | Display OFF | OFF     | ON    | ON       | ON       | Enable               |
| 2            | Display ON  | ON      | OFF   | ON       | ON       | Enable               |

| State Transition | Transition       | Index                               |
|------------------|------------------|-------------------------------------|
| ①                | Power ON         | Refer to<br>"Power ON/OFF Sequence" |
| ②                | Power OFF        |                                     |
| ③                | Display ON       |                                     |
| ④                | Display OFF      |                                     |
| ⑦                | Initialization   | Initialize Setting of Command/Data  |
| ⑧                | Image Rewriting  | Send Display Data                   |
|                  | Display Settings | Dimmer, Scroll, etc.                |

## Power ON/OFF Sequence

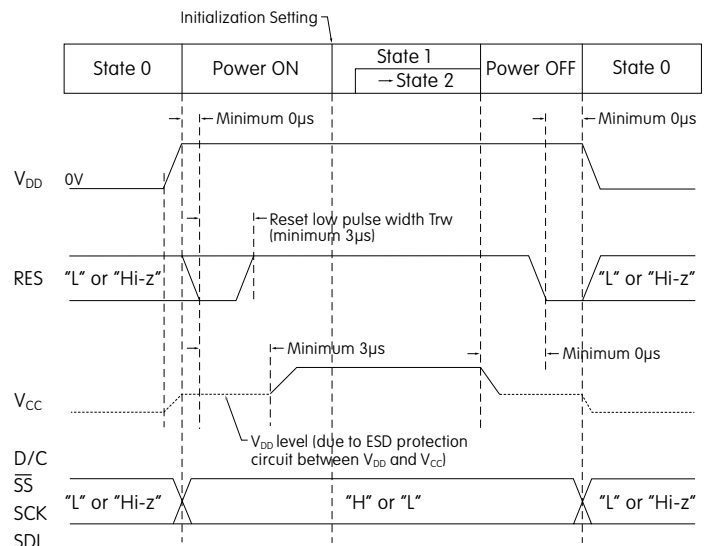

Note: Refer to Application Notes on web site.

## PRECAUTIONS FOR HANDLING & STORAGE OF OLED DEVICES



### Handling

1. The IS Series OLED devices are electrostatic sensitive. To avoid damage to IC, do not touch terminals unless properly isolated from static electricity.
2. Signal input under conditions not recommended may cause damage to the OLED unit or deterioration of the display. Follow directions regarding supply sequences of power and signal voltages.
3. If the OLED panel is broken, avoid touching the contents. Wash off any contact to the skin or clothing.
4. Limit operating force to switch keytop to 100.0N maximum, as excessive pressure may damage the OLED.
5. Recommended soldering time and temperature limits:  
11 seconds maximum @ 270°C maximum; avoid temperatures exceeding 80°C at the OLED.
6. The IS series OLED devices are not process sealed.
7. Pixels acquire diminished brightness over time and use, and those most frequently habituated have greater reduction of brightness than those less used. To minimize this difference, operate OLED unit so that all pixels are used as consistently as possible.
8. Clean cap surface with dry cloth. If further cleaning is needed, wipe with dampened cloth using neutral cleanser and dry with clean cloth. Do not use organic solvent.

### Storage

1. Store in original container and away from direct sunlight.
2. Keep away from static electricity.
3. Avoid extreme temperatures, high humidity, gaseous substances, and all forms of chemical contamination.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9