

2N6214

**SILICON
PNP POWER TRANSISTOR**



TO-66 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N6214 is a silicon PNP power transistor mounted in a hermetically sealed metal case, designed for general purpose amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_C=25^{\circ}\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Collector-Emitter Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Continuous Base Current
Power Dissipation
Power Dissipation ($T_C=100^{\circ}\text{C}$)
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

V_{CBO}	450
V_{CEX}	450
V_{CER}	425
V_{CEO}	400
V_{EBO}	6.0
I_C	2.0
I_B	1.0
P_D	35
P_D	20
T_J, T_{stg}	-65 to +200
Θ_{JC}	5.0

UNITS

V
V
V
V
V
A
A
W
W
$^{\circ}\text{C}$
$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CEV}	$V_{CE}=410\text{V}, V_{EB}=1.5\text{V}$		1.0	mA
I_{CEV}	$V_{CE}=410\text{V}, V_{EB}=1.5\text{V}, T_C=100^{\circ}\text{C}$		10	mA
I_{CEO}	$V_{CE}=150\text{V}$		5.0	mA
I_{EBO}	$V_{EB}=6.0\text{V}$		0.5	mA
BV_{CEO}	$I_C=200\text{mA}$	400		V
BV_{CER}	$I_C=200\text{mA}, R_{BE}=50\Omega$	425		V
BV_{CEX}	$I_C=200\text{mA}, V_{BE}=1.5\text{V}, R_{BE}=50\Omega$	450		V
BV_{EBO}	$I_B=500\text{mA}$	6.0		V
$V_{CE(SAT)}$	$I_C=1.0\text{A}, I_B=125\text{mA}$		2.5	V
$V_{BE(SAT)}$	$I_C=1.0\text{A}, I_B=125\text{mA}$		1.4	V
h_{FE}	$V_{CE}=5.0\text{V}, I_C=1.0\text{A}$	10	100	
$ h_{fe} $	$V_{CE}=10\text{V}, I_C=200\text{mA}, f=5.0\text{MHz}$	4.0		
C_{ob}	$V_{CB}=10\text{V}, f=1.0\text{MHz}$		220	pF
$I_{s/b}$	$V_{CE}=40\text{V}$	875		mA
t_r	$V_{CC}=200\text{V}, I_C=1.0\text{A}, I_{B1}=I_{B2}=125\text{mA}$		0.6	μs
t_s	$V_{CC}=200\text{V}, I_C=1.0\text{A}, I_{B1}=I_{B2}=125\text{mA}$		2.5	μs
t_f	$V_{CC}=200\text{V}, I_C=1.0\text{A}, I_{B1}=I_{B2}=125\text{mA}$		0.6	μs

R0 (15-January 2019)

2N6214
SILICON
PNP POWER TRANSISTOR



TO-66 CASE - MECHANICAL OUTLINE

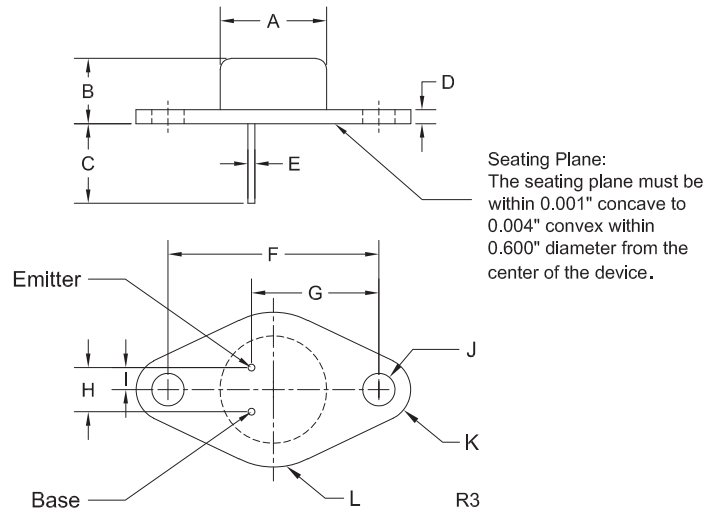

MARKING:
FULL PART NUMBER

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.470	0.500	11.94	12.70
B	0.250	0.340	6.35	8.64
C	0.360	-	9.14	-
D	0.050	0.075	1.27	1.91
E (DIA)	0.028	0.034	0.71	0.86
F	0.956	0.964	24.28	24.48
G	0.570	0.590	14.48	14.99
H	0.190	0.210	4.83	5.33
I	0.093	0.107	2.36	2.72
J (DIA)	0.142	0.152	3.61	3.86
K (RAD)	0.141		3.58	
L (RAD)	0.345		8.76	

TO-66 (REV:R3)

R0 (15-January 2019)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9