

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS


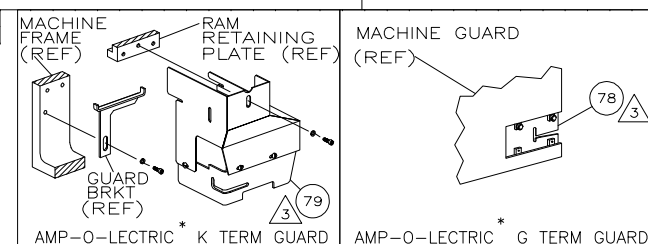
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G1	ECR-14-001797	07FEB2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2150051-2

FOR REPLACEMENT PARTS FOR APPLICATOR 567462
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.

THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
567462

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GOPALAKRISHNA HV		 TE Connectivity	
DIMENSIONS:		CHK RAGHAVENDRA			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RAGHAVENDRA	
		0 PLC ±		NAME	
		1 PLC ±		END FEED HDM APPLICATOR	
MATERIAL		2 PLC ±		PRODUCT SPEC	
		3 PLC ±		APPLICATION SPEC	
		4 PLC ±		SIZE	
FINISH		ANGLES ±		CAGE CODE	
		WEIGHT		DRAWING NO	
		CUSTOMER ACCESSIBLE PRODUCTION DRAWING		©- 567462	
		SCALE		RESTRICTED TO	
		SHEET 1 OF 2		REV G1	

[illegible]

CRIMPING DATA				
PAD LTR	CRIMP HEIGHT	WIRE SIZE		
A	.080 ±.002	12		
B	.068 ±.002	14		
C	NOT	USED		
D	NOT	USED		
CRIMP	SIZE	TYPE	RANGE	
WIRE	.130	F	14-12	
INSUL	.180	F	.114-.150	
FEED	APPL INST	SET UP GAGE	LAYO	
1.043	408-8039	458638-1	L146	
WIRE STRIP LENGTH		.145-.170		

LOC		DIST		REVISIONS					
A		66		P	LTR	DESCRIPTION	DATE	DWN	A
					G	ECR-07-021113	9-2007	MY	C

-1	LEADMAKER	MECH POST FEE
-2	BENCH MODEL K	MECH-POST FEE
-3	BENCH MODEL G	MECH-POST FEE

REF	REF	REF	—	22594-8	NUT, HEX	7
REF	REF	REF	—	240628-1	PLATE, ADJ	6
REF	REF	REF	—	240626-1	SHAFT, PIVOT	6
REF	REF	REF	—	240633-1	BUSHING	6
REF	REF	REF	—	455680-1	LEVER, INTERMEDIATE	6
REF	REF	REF	—	240629-1	BLOCK, PIVOT	6
REF	REF	REF	—	240632-2	SCR, ADJ	6
REF	REF	REF	—	240659-3	PIN, CAM ROLLER	6
REF	REF	REF	—	240658-1	CAM, ROLLER	6
REF	REF	REF	—	454398-1	ROD, FEED	6

REF	REF	REF	—	454220-1	CAP, RAM	5
REF	REF	REF	—	453736-1	HOUSING	5

REF	REF	REF	—	240624-1	PIN, FEED FINGER	5
REF	REF	REF	—	691499-1	SPRING, FEED FINGER	5
REF	REF	REF	—	240635-1	FINGER, FEED	5
REF	REF	REF	—	240634-1	LEVER, TERMINAL	5

—	1	—	—	690501-3	CAM, POST FEED 1 1/8 ST	4
1	—	1	—	690501-4	CAM, POST-FEED 1 5/8 ST	4

1	1	1	—	690191-1	PLUG, NYLON	4
1	1	1	—	455674-1	RAM	4
1	1	1	—	690125-1	WASHER, LAMINATED	4
1	1	1	—	690124-1	WASHER, RAM	4
1	1	1	—	7-21002-9	BOLT, CRIMPER(5/16-24x1.00)	4
1	1	1	—	23241-6	BALL, STEEL	4
1	1	1	—	690170-1	SPRING, COMPRESSION	3
1	1	1	—	690142-1	DISC, INSULATION	3
1	1	1	—	354777-1	WIRE DISC, PLASTIC	3
1	1	1	—	22480-5	WASHER, SPRING	3
1	1	1	—	690212-1	POST, RAM	3

1	1	1	-	458980-1	APPLICATOR, BASIC (SUB ASSY)	3
---	---	---	---	----------	------------------------------	---

1	1	1	—	3-690451-2	SPACER, STRIPPER	2
1	1	1	—	240639-1	STRIPPER	2
REF	REF	REF	—	455676-1	PLATE, BASE	2
2	2	2	—	22354-8	DRAG, STUD	2
1	1	1	—	455678-1	PLATE, STRIP GUIDE	2

2	2	2	-	4-22281-1	SPRING, DRAG	2
1	1	1	-	454177-1	DRAG, STOCK	2
1	1	1	-	1-458030-2	GUIDE, STRIP (REAR)	1
1	1	1	-	1-458031-2	GUIDE, STRIP (FRONT)	1
REF	REF	REF	-	454178-1	GUIDE, FEED ROD	1
REF	REF	REF	-	4-22284-9	SPRING, FEED RETURN	1

	-	-	-	-	-	-	1
1	1	1	-	240833-7	PLATE, REAR SHEAR		1

1	1	1	1	-	3-690482-2	PLATE, FRONT SHEAR	9
	1	1	1	-	240655-8	ANVIL	8

-	-	-	-	-	-	6
---	---	---	---	---	---	---

1	1	1	1	—	238009-4	SPACER, BLOCK CRIMPER	4
	1	1	1	—	4-683453-0	CRIMPER, INSULATION	3

1	1	1	1	-	456410-4	CRIMPER, WIRE	1
---	---	---	---	---	----------	---------------	---



[illegible]

THIS IS A CONTROLLED DOCUMENT.  Tyco Electronics Corporation
Harrisburg, PA 17105-3608

0 PLC		± -	T. BEDDICK PRODUCT SPEC	END FEED HDM APPLICATOR -
1 PLC		± -		

3	PLC	± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED
4	PLC	± -		A 1	00370	503400	
	ANGLES	± -					
	FINISH		WEIGHT				

CUSTOMER DRAWING	SCALE	SHEET	OF	REV
	—	1	1	(

POST-FEED 1 5/8 STROKE  Diagram showing the T Terminating Unit Leadmaker. It features a vertical block (44) with a horizontal arm (47) extending from its side. A small circular component (99) is attached to the end of the arm. A reference point (REF) is indicated on the block. A triangle with the number 2 is shown below the arm.	POST-FEED 1 1/8 STROKE  Diagram showing the K Terminating Unit Bench Machine. It features a vertical block (44) with a horizontal arm (48) extending from its side. A small circular component (99) is attached to the end of the arm. A reference point (REF) is indicated on the block. A triangle with the number 2 is shown below the arm.	POST-FEED 1 5/8 STROKE  Diagram showing the G Terminating Unit Bench Machine. It features a vertical block (44) with a horizontal arm (47) extending from its side. A small circular component (99) is attached to the end of the arm. A reference point (REF) is indicated on the block. A triangle with the number 2 is shown below the arm.
T TERMINATING UNIT LEADMAKER	K TERMINATING UNIT BENCH MACHINE	G TERMINATING UNIT BENCH MACHINE

1. RECOMMENDED SPARE PARTS.
 2. GREASE LIGHTLY.
 3. GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN AMP-O-ELECTRIC MACHINE.
 4. LUBRICATE DAILY USING NO. 20 MACHINE OIL.
5. ITEMS WITH QTY OF REF SPECIFIED (EXCEPT ITEMS 78 AND 79) ARE USED ON ITEM 32.

AMP 4805 REV 31MAR2000

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9