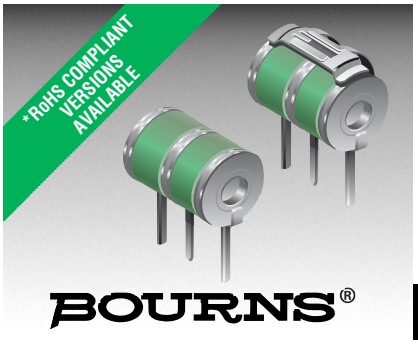

Features

- Balanced TRIGARD®
- Approximately 8 mm diameter, 11 mm long
- UL recognized
- Custom configurations available
- High surge current rating
- Stable breakdown throughout life
- RoHS compliant* version available

Applications

- Telecommunications
- Industrial electronics
- Commercial electronics
- Consumer electronics
- Automotive, aircraft, military electronics

2026 Series - 3-Pole Gas Discharge Tube

Characteristics

Test Methods per ITU-T (CCITT) K.12, IEEE C62.31, RUS PE-80, Telcordia GR 1361

Characteristic	Model No.						
	2026-07	2026-09	2026-15	2026-20	2026-23	2026-25	2026-26
DC Sparkover ±20 % @ 100 V/s	75 V	90 V	150 V	200 V	230 V	250 V	260V[1]
Impulse Sparkover							
100 V/µs	275 V	275 V	350 V	425 V	450 V	475 V	475 V
1000 V/µs	700 V	600 V	575 V	625 V	650 V	700 V	700 V

Characteristic	Model No.					
	2026-30	2026-35	2026-40	2026-42	2026-47	2026-60
DC Sparkover ±20 % @ 100 V/s	300 V	350 V	400 V	420 V	470 V	600 V
Impulse Sparkover						
100 V/µs	500 V	625 V	675 V	725 V	800 V	925 V
1000 V/µs	775 V	875 V	925 V	1000 V	1100 V	1250 V

Impulse Transverse Delay	1000 V/µs	< 75 ns	
Insulation Resistance	100 V (50 V for Model 2026–07 & 2026-09)	> 10^{10} Ω	
Glow Voltage	10 mA	~ 70 V	
Arc Voltage	1A	~ 10 V	
Glow-Arc Transition Current		< 0.5 A	
Capacitance	1 MHz	< 2 pF	
DC Holdover Voltage[2]	>135 V, (52 V for Model 2026-07 & 2026-09, 80 V for Model 2026-15)	< 150 ms	
Impulse Discharge Current	40000 A, 8/20 µs[3]	1 operation minimum	
	20000 A, 8/20 µs	> 10 operations	
	5000 A, 10/350 µs	1 operation	
	1000 A, 10/1000 µs	> 400 operations	
Alternating Discharge Current	130 Arms, 11 cycles[3]	1 operation minimum	
	20 Arms, 1 s	> 10 operations	
Operation and Storage Temperature		-40 to +90 °C	
Climatic Category (IEC 60068-1)		40/ 90/ 21	

Optional Switch-Grade Fail-short device available.

Notes:

- **UL recognized component, UL File E153537.**
- Model number marking on tube: 26-xxx V.
- The rated discharge current for TRIGARD® Gas Discharge Tubes is the total current equally divided between each line to ground.
- Sparkover limits after life ±25 %, IR >10^8Ω (-25 %,+30 % for Model 2026-07, 2026-09 and 2026-60).
- Line to Line voltage is approximately 1.8 to 2 times the stated Line to Ground breakdown voltage.
- At delivery AQL 0.65 Level II, DIN ISO 2859

[1] Tube meets BT requirement Type 14 A/1 (210-310 V).
[2] Network applied.
[3] DC Sparkover may exceed ±25 % after discharge, but will continue to protect without venting.

*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Product Dimensions (additional lead form configurations available upon request)

2026-XX-A

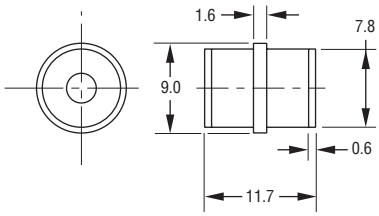

2026-XX-A1

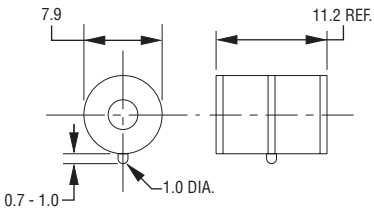

2026-XX-C2

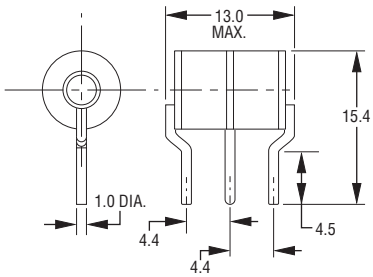

2026-XX-C3

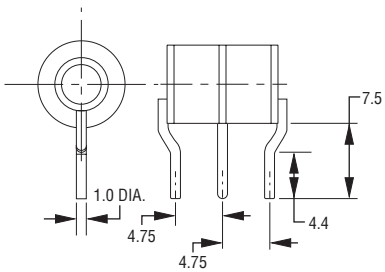

2026-XX-C4

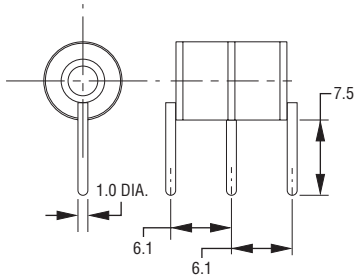

2026-XX-C8



2026-XX-C
1.0 mm dia. lead wire

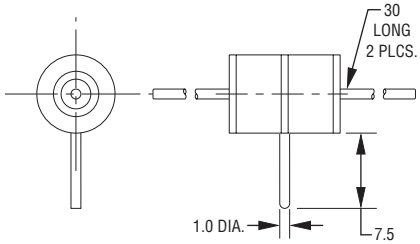

FAIL-SHORT CONFIGURATION
2026-XX-C2F SHOWN



DIMENSIONS: MILLIMETERS
UNITS WITH LEADS ARE BASED ON THE 2026-XX-A1 BODY.

How to Order

2026 - nn - x n F LF

Model Number Designator

Voltage (Divided by 10)

07 = 75 V	30 = 300 V
09 = 90 V	35 = 350 V
15 = 150 V	40 = 400 V
20 = 200 V	42 = 420 V
23 = 230 V	47 = 470 V
25 = 250 V	60 = 600 V
26 = 260 V	

Leads
A = None
C = 1 mm

Lead Shape
(See Product Dimension Drawings)

Fail-Short Option
Blank = Standard Product
F = With Fail-Short Mechanism

RoHS Compliant Option
Blank =Standard Product
LF = RoHS Compliant Product

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Switch-Grade Fail-short Device Shorting Curve 2026-XX-XF

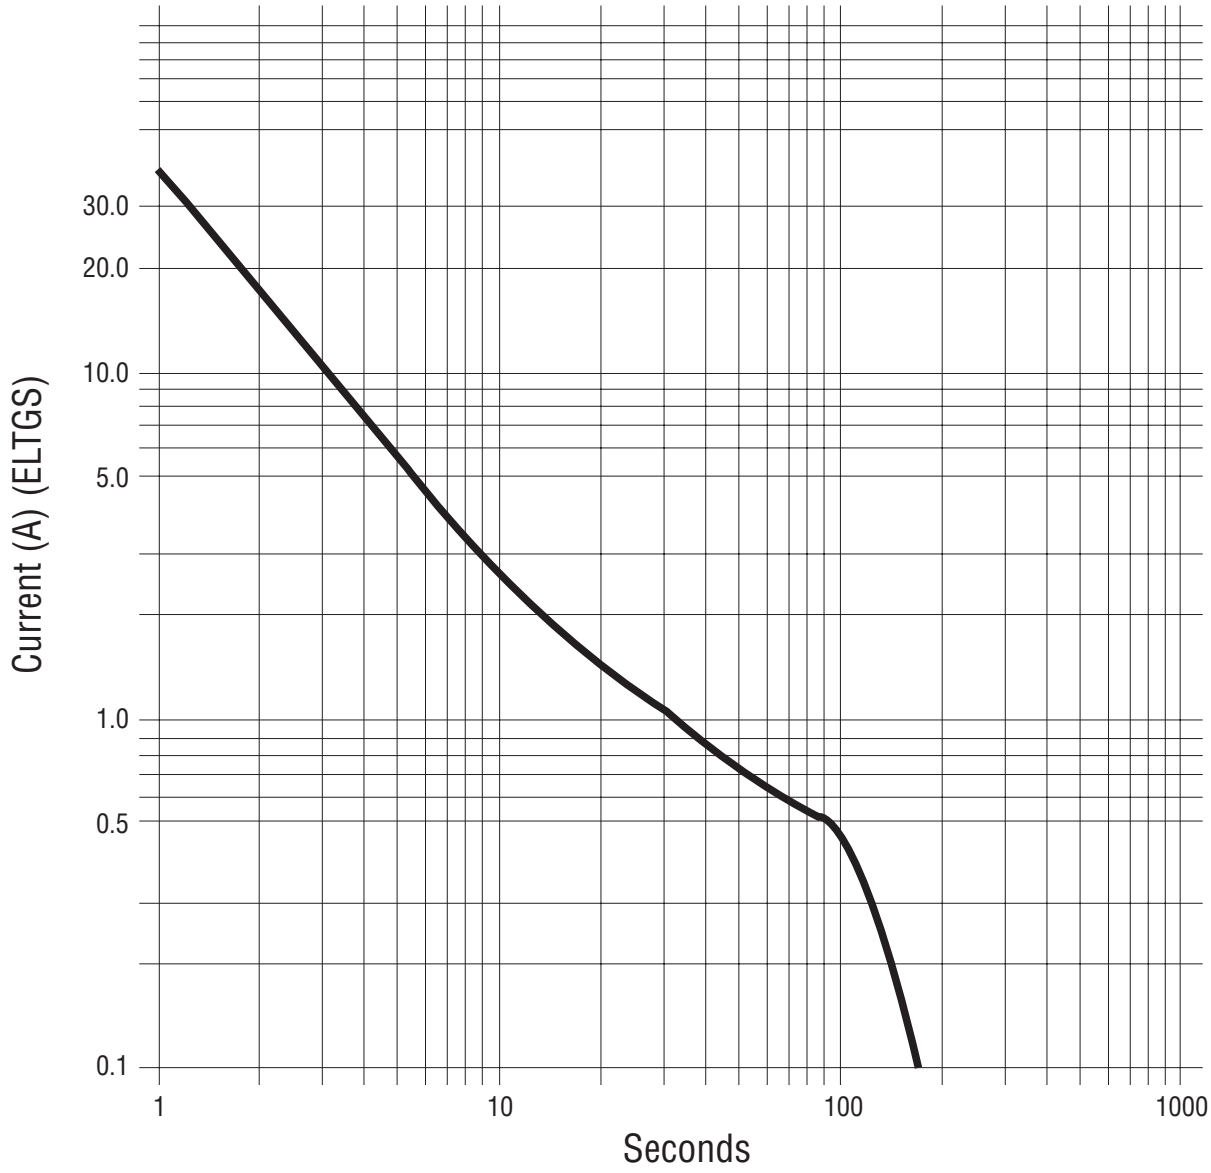

ELTGS = Each Line to Ground Simultaneously

NOTE: When using a GDT fail-short device, it is imperative that all components associated and connected to the GDT with failsafe be tested in their respective completely integrated environment (finished product) to assure desired operation.

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9